


## Plasma Panel Displays

### Dual Linear Bar Graph

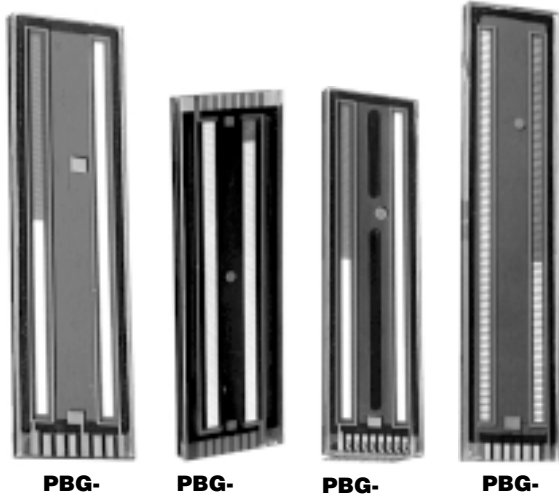

PBG-                      PBG-                      PBG-                      PBG-

**FEATURES**

- Two separate bar graphs, each including reset for 1/2% or 1% resolution (see chart)
- At normal viewing distances glow blends into continuous, but precisely controlled bar length
- Unique scanning technique minimizes the number of drivers required
- PBG-12203 bars may be scanned from either direction or both directions simultaneously
- PBG-12203 can display four separate columns of information, providing combined total of information does not exceed 201 clock counts per bar

**ENVIRONMENTAL SPECIFICATIONS**

- Altitude:** 0 to 70,000 feet.
- Operating Temperature:** 0°C to + 55°C.
- Storage Temperature:** - 55°C to + 85°C.
- Relative Humidity (No Condensation):** 85% maximum.
- Vibration:** .018 inches DA, 10 to 50 Hz, 2G, 50 to 2000 Hz.
- Shock:** 50G, 1/2 sine wave, 11 mS duration.

<b>ELECTRICAL SPECIFICATIONS</b>																
OPERATING PARAMETERS	PBG-12201				PBG-12203				PBG-12205				PBG-16101			
Parameter	Min.	Max.	Rec.	Units	Min.	Max.	Rec.	Units	Min.	Max.	Rec.	Units	Min.	Max.	Rec.	Units
Anode Supply Voltage	235	265	250	V	235	265	250	V	235	265	250	V	235	265	250	V
Cathode Off Bias Voltage	68	76	72	V	68	76	72	V	68	76	72	V	68	76	72	V
Anode Off Bias Voltage	80	120	100	V	80	120	100	V	80	120	100	V	80	120	100	V
Anode Sustaining Voltage (Typical)	—	—	150	V	—	—	150	V	—	—	150	V	—	—	150	V
Refresh Rate	—	—	70	Hz	—	—	70	Hz	—	—	70	Hz	—	—	70	Hz
Keep Alive Anode Resistor	—	—	1M	Ω	—	—	1M	Ω	—	—	1M	Ω	—	—	1M	Ω
Keep Alive Cathode Resistor	—	—	1M	Ω	—	—	1M	Ω	—	—	1M	Ω	—	—	1M	Ω
Keep Alive Current (Typical)	—	—	50	μA	—	—	50	μA	—	—	50	μA	—	—	50	μA
Display Anode Resistor	—	—	36k	Ω	—	—	24k	Ω	—	—	24k	Ω	—	—	20k	Ω
Display Peak Anode Current	2.5	3.0	2.8	mA	3.7	4.5	4.2	mA	3.5	5.0	4.0	mA	4.0	6.0	5.0	mA
Scan Time per Cathode	70	90	70	μS	70	90	70	μS	60	90	70	μS	120	180	140	μS
Applied Reset Pulse Width	140	180	140	μS	140	180	140	μS	70	180	140	μS	120	180	140	μS

<b>OPTICAL SPECIFICATIONS</b>								
	PBG-12201		PBG-12203		PBG-12205		PBG-16101	
Elements	201		203		201		101	
Resolution	1/2%		1/2%		1/2%		1%	
Segment Length	.100"		.150"		.100"		.100"	
Segment Width	.011"		.010"		.011"		.020"	
Segment Spacing	.020"		.020"		.020"		.050"	
Drivers Required	6		12		8		6	
Luminance	35 fl		30 fl		70 fl		60 fl	
Viewing Angle	120°		120°		120°		120°	
Color	Neon Orange		Neon Orange		Neon Orange		Neon Orange	



## Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.