




060120A25

NOTES:

1. OPERATING TEMPERATURE: -55°C TO +125°C. (SEE CHART)
2. DESIGNED TO MEET OR EXCEED APPLICABLE PORTIONS OF MIL-E-5400 & MIL-R-55342.
3. WHEN MOUNTING, RF PAD IS LOCATED ON OPPOSITE SIDE OF TRACKING HOLES ON TAPE & REEL.
4. TAPE & REEL SIZE: 8 MM (SEE TAPE DETAIL)
5. RoHS COMPLIANT.

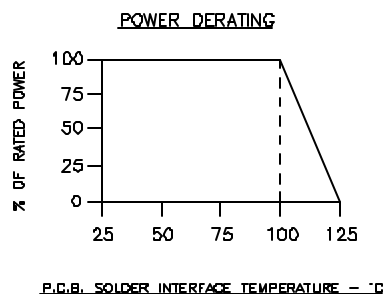

REVISIONS				
REV	RCN	DESCRIPTION	DATE	APP
A	3574	INITIAL RELEASE	4/01	MS
B	3611	UPDATED VIEWS	5/01	MS
C	3758	REMOVE MARKING	8/01	TJD
D	4087	CHANGE FREQUENCY RANGE FROM 4.0 TO 6.0	2/02	TJD
E	5616	REVISE SPECIFICATION NOTE	11/04	TJD
F	82619	REFORMAT DWG NO.	06-22-05	JH
G	89545	ADD TAPE AND REEL	03-20-06	MC
H	94572	MOVE ORIENTATION DOT	08-08-06	PP

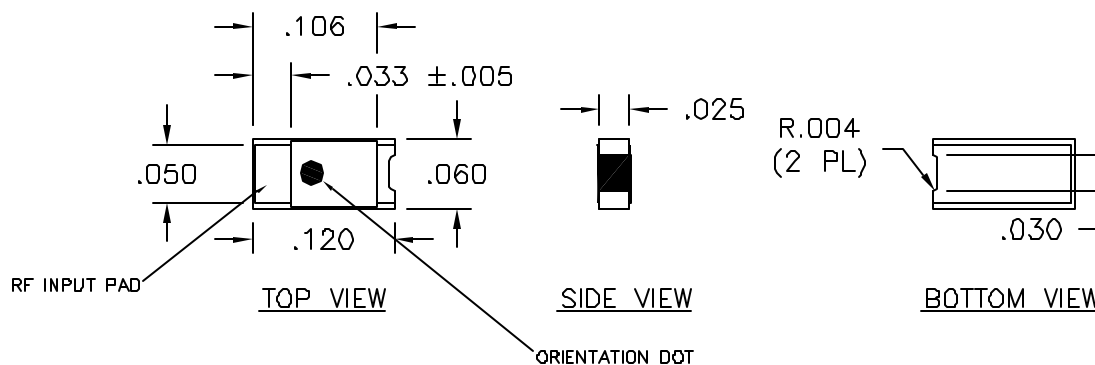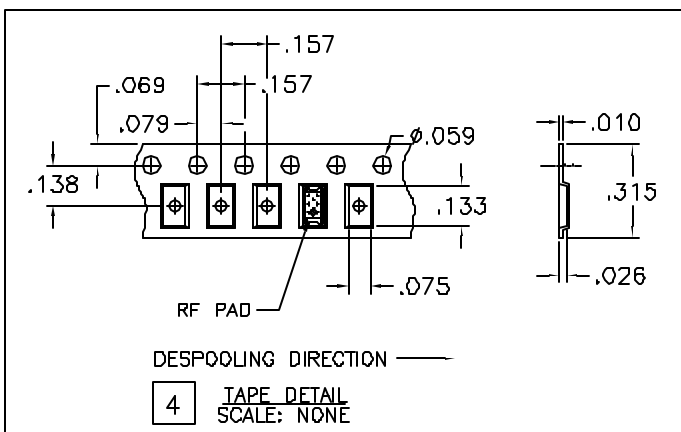

GENERAL SPECIFICATIONS

RESISTIVE ELEMENT: PROPRIETARY THICK FILM
 SUBSTRATE: ALUMINA CERAMIC, AL₂O₃
 FINISH: THICK FILM SILVER

PERFORMANCE SPECIFICATIONS

FREQUENCY RANGE: DC - 6.0 GHz.
 INPUT POWER: 10 WATTS
 VSWR: 1.25:1

VALUE	TOL.	REFERENCE
50 Ω	±2%	RFP-060120A25X50-2

THIS DRAWING CONTAINS PROPRIETARY INFORMATION ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IS EXPRESSLY PROHIBITED EXCEPT AS OTHERWISE AUTHORIZED IN WRITING.	DRN BY	REP	DATE
	CHKD BY	TJD/NE	4/01
	ENG.	TJD	4/01
	MFG.	TJD/GS	4/01
MATERIAL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON DECIMALS .XXX±.010		
FINISH			

Anaren Ceramics
 SUBSIDIARY OF ANAREN INC. SALEM, NEW HAMPSHIRE

**OUTLINE
 SURFACE MOUNT
 10 WATT AL₂O₃ TERMINATION**

SIZE	CAGE CODE	DOC TY	REV.
B	0BXB2	304	H

060120A25

SCALE 10/1 REF SHEET 1 OF 1