

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


5031750410

Status:

Active

Description:

1.50mm (.059") Pitch CLIK-Mate™ Wire-to-Board PCB Receptacle, Single Row, Through Hole, Right Angle, without Peg, 4 Circuits

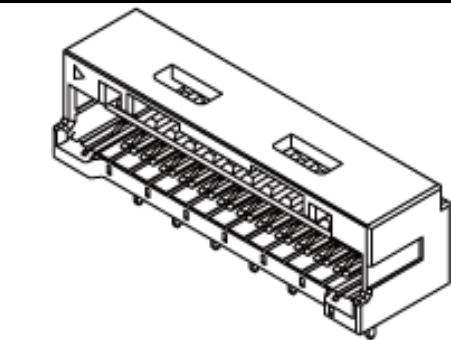

Series
image - Reference only

Documents:

3D Model

Drawing (PDF)

Product Specification PS-503175-001 (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Series

Application

Product Name

PCB Receptacles

503175

Wire-to-Board

CLIK-Mate™

Physical

Circuits (Loaded)

Color - Resin

Durability (mating cycles max)

Glow-Wire Compliant

Guide to Mating Part

Keying to Mating Part

Lock to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Number of Rows

Orientation

PCB Locator

PCB Retention

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Polarized to Mating Part

Polarized to PCB

Stackable

Temperature Range - Operating

Termination Interface: Style

4

Beige

30

No

Yes

Yes

Yes

Copper Alloy

Tin

Tin

1

Right Angle

No

Yes

0.062 In

1.60 mm

Tray

0.059 In

1.50 mm

Yes

Yes

No

-25°C to +85°C

Through Hole

Electrical

Current - Maximum per Contact

Voltage - Maximum

2A

100V

Material Info

Reference - Drawing Numbers

Product Specification

Sales Drawing

PS-503175-001, RPS-503175-001

SD-503175-002

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?



Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.


Search Parts in this Series
503175Series

Mates With
502578 Crimp Housing . 502579 Crimp Terminal

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

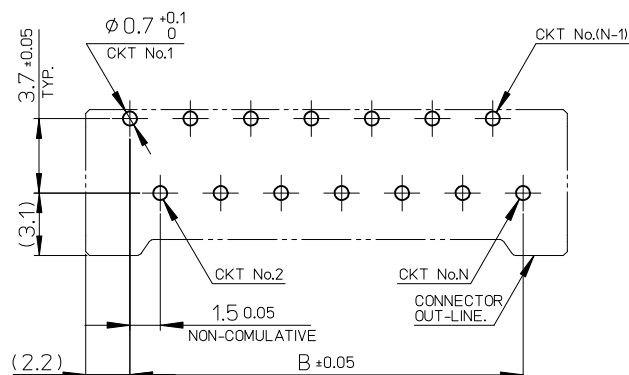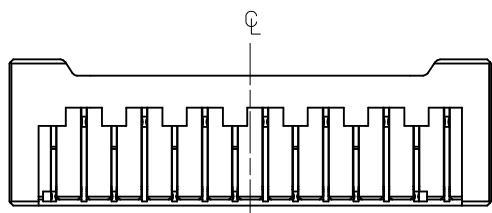


基板取付穴推奨寸法(マウント面)



No.	部品 PART	材料 MATERIAL
①	ハウジング HOUSING	ポリアミド(PA) UL94V-0 POLYAMIDE UL94V-0 色 : 注記 5. 参照 COLOR: SEE NOTES 5.
②	ターミナル TERMINAL	銅合金 COPPER ALLOY テール部 : 錫めっき TAIL AREA: TIN PLATING 下地 : ニッケルめっき (1.0μm以上) UNDER PLATING: NICKEL (1.0 MICROMETER MINIMUM)

CIRCUIT No.1
MARK.



2~11極 CIRCUIT NO.1

CIRCUIT No.1 OF 2-11 CIRCUIT

26.8	21	25.4	503175-151*	15
25.3	19.5	23.9	503175-141*	14
23.8	18	22.4	503175-131*	13
22.3	16.5	20.9	503175-121*	12
20.8	15	19.4	503175-111*	11
19.3	13.5	17.9	503175-101*	10
17.8	12	16.4	503175-091*	9
16.3	10.5	14.9	503175-081*	8
14.8	9	13.4	503175-071*	7
13.3	7.5	11.9	503175-061*	6
11.8	6	10.4	503175-051*	5
10.3	4.5	8.9	503175-041*	4
8.8	3	7.4	503175-031*	3
7.3	1.5	5.9	503175-021*	2
C	B	A	TRAY PACKAGE ORDER No.	CIRCUIT

REVISED	EC NO.: J2009-2905 DRWN: TOGA CHKD: SMARUYAMA APPR: SICHIKAWA	2009/06/25 2009/06/25 2009/06/26	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1	DESIGN UNITS METRIC		THIRD ANGLE PROJECTION
				10 UNDER	± 0.2	DRAWN BY NNISHI	DATE 2008/09/03	TITLE 1.5 W/B SINGLE DIP R/A REC.ASSY 2-15CKT WITHOUT BOSS			
				10 OVER 30 UNDER	± 0.25	CHECKED BY SMARUYAMA	DATE 2008/09/03				
				30 OVER	± 0.3	APPROVED BY SICHIKAWA	DATE 2008/09/03	 MOLEX INCORPORATED			
				ANGULAR ±3 °		MATERIAL NO.					
				DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3		SEE TABLE SD-503175-002 1 OF 2			
D	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

F

E

D

C

B

A

F

E

D

C


B

A

△ COLOR VARIATION&ORDER No.										
VIOLET	ORANGE	BROWN	GREEN	PINK	BLUE	YELLOW	RED	BLACK	BEIGE	
503175-1519	503175-1518	503175-1517	503175-1516	503175-1515	503175-1514	503175-1513	503175-1512	503175-1511	503175-1510	15
503175-1419	503175-1418	503175-1417	503175-1416	503175-1415	503175-1414	503175-1413	503175-1412	503175-1411	503175-1410	14
503175-1319	503175-1318	503175-1317	503175-1316	503175-1315	503175-1314	503175-1313	503175-1312	503175-1311	503175-1310	13
503175-1219	503175-1218	503175-1217	503175-1216	503175-1215	503175-1214	503175-1213	503175-1212	503175-1211	503175-1210	12
503175-1119	503175-1118	503175-1117	503175-1116	503175-1115	503175-1114	503175-1113	503175-1112	503175-1111	503175-1110	11
503175-1019	503175-1018	503175-1017	503175-1016	503175-1015	503175-1014	503175-1013	503175-1012	503175-1011	503175-1010	10
503175-0919	503175-0918	503175-0917	503175-0916	503175-0915	503175-0914	503175-0913	503175-0912	503175-0911	503175-0910	9
503175-0819	503175-0818	503175-0817	503175-0816	503175-0815	503175-0814	503175-0813	503175-0812	503175-0811	503175-0810	8
503175-0719	503175-0718	503175-0717	503175-0716	503175-0715	503175-0714	503175-0713	503175-0712	503175-0711	503175-0710	7
503175-0619	503175-0618	503175-0617	503175-0616	503175-0615	503175-0614	503175-0613	503175-0612	503175-0611	503175-0610	6
503175-0519	503175-0518	503175-0517	503175-0516	503175-0515	503175-0514	503175-0513	503175-0512	503175-0511	503175-0510	5
503175-0419	503175-0418	503175-0417	503175-0416	503175-0415	503175-0414	503175-0413	503175-0412	503175-0411	503175-0410	4
503175-0319	503175-0318	503175-0317	503175-0316	503175-0315	503175-0314	503175-0313	503175-0312	503175-0311	503175-0310	3
503175-0219	503175-0218	503175-0217	503175-0216	503175-0215	503175-0214	503175-0213	503175-0212	503175-0211	503175-0210	2
TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	TRAY PACKAGE ORDER NO.	CIRCUIT



NOTES

1. 嵌合相手：502578シリーズ
MATE WITH：502578 SERIES.
2. 極数＝偶数に適用
APPLY FOR CIRCUIT SIZE/2-EVEN.
3. 端子テール部に錫めっきを使用している為、外観に摺動痕が付く場合があります。
THE WOUND OF FRICTION MIGHT ADHERE TO EXTERNALS
BECAUSE THE TIN PLATING IS USED FOR THE TAIL.
4. 製品番号
MATERIAL No.



ボス無し WITHOUT BOSS.			
CIRCUIT	WITHOUT BOSS No.	COLOR No.	COLOR
02~15	1	0	ベージュ BEIGE
		1	黒 BLACK
		2	赤 RED
		3	黄 YELLOW
		4	青 BLUE
		5	桃 PINK
		6	緑 GREEN
		7	茶 BROWN
		8	橙 ORANGE
		9	紫 VIOLET

5. 本製品のプラスチック部に黒点・白点等が確認される場合や色合いが異なる場合がありますが、製品性能に影響はありません。
THERE IS NO INFLUENCE IN THE PRODUCT PERFORMANCE THOUGH THE BLACK AND WHITE SPOT ETC. MIGHT BE CONFIRMED TO THE PLASTIC PART OF THIS PRODUCT AND THE SHADE MIGHT BE DIFFERENT.
6. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT
7. ボス有形状は“SD-503159-001”を参照願います。
REFER TO “SD-503159-001” FOR WITH BOSS.

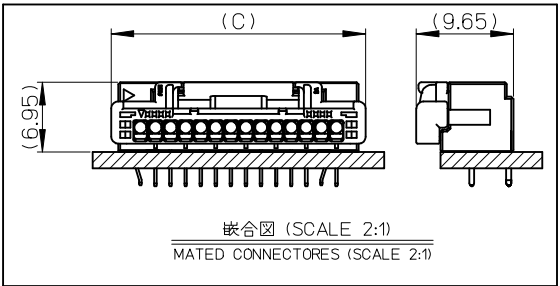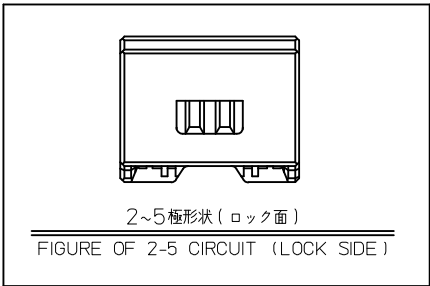

REVISED
EC NO: J2009-2905
DRWN: TODA 2009/06/25
CHKD: SMARUYAMA 2009/06/25
APPR: SICHIKAWA 2009/06/26
REV

DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER ±0.2

10 OVER 30 UNDER ±0.25

30 OVER ±0.3

ANGULAR ±3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE
MM ONLY

DRAWN BY DATE
NNISHI 2008/09/03

CHECKED BY DATE
SMARUYAMA 2008/09/03

APPROVED BY DATE
SICHIKAWA 2008/09/03

MATERIAL NO.

SIZE
A3

SCALE

DESIGN UNITS
METRIC

THIRD ANGLE PROJECTION

TITLE
1.5 W/B SINGLE DIP
R/A REC.ASSY 2-15CKT
WITHOUT BOSS

MOLEX INCORPORATED

DOCUMENT NO.
SD-503175-002

SHEET NO.
2 OF 2

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION