

Inductors, Subminiature, Shielded

Subminiature, Shielded



STANDARD ELECTRICAL SPECIFICATIONS

MODEL	IND. (μH)	TOL.	Q MIN.	TEST FREQ. (MHz)	SRF MIN. (MHz)	DCR MAX. (Ohms)	RATED DC CURRE	INCR.* CURRENT (mA)	
IMS-2WWD-40	0.10	± 10 %	42	25	> 400	0.112	1720	> 1720	PHENOLIC
IMS-2WWD-40	0.12	± 10 %	42	25	> 400	0.126	1630	> 1630	
IMS-2WWD-40	0.15	± 10 %	42	25	> 400	0.138	1550	> 1550	
IMS-2WWD-40	0.18	± 10 %	42	25	366	0.165	1420	> 1420	
IMS-2WWD-40	0.22	± 10 %	42	25	331	0.198	1330	> 1330	
IMS-2WWD-40	0.27	± 10 %	42	25	298	0.220	1230	> 1230	
IMS-2WWD-40	0.33	± 10 %	42	25	288	0.258	1140	> 1140	
IMS-2WWD-40	0.39	± 10 %	42	25	271	0.292	1060	> 1060	
IMS-2WWD-40	0.47	± 10 %	41	25	247	0.360	960	> 960	
IMS-2WWD-40	0.56	± 10 %	39	25	236	0.397	915	> 915	
IMS-2WWD-40	0.68	± 10 %	36	25	216	0.472	840	> 840	
IMS-2WWD-40	0.82	± 10 %	35	25	200	0.638	720	> 720	
IMS-2WWD-40	1.0	± 10 %	42	25	136	0.208	1260	> 1260	IRON
IMS-2WWD-40	1.2	± 10 %	38	7.9	120	0.225	1210	> 1210	
IMS-2WWD-40	1.5	± 10 %	38	7.9	111	0.265	1120	> 1120	
IMS-2WWD-40	1.8	± 10 %	38	7.9	103	0.285	1080	> 1080	
IMS-2WWD-40	2.2	± 10 %	36	7.9	94	0.330	1000	> 1000	
IMS-2WWD-40	2.7	± 10 %	38	7.9	85	0.381	935	> 935	
IMS-2WWD-40	3.3	± 10 %	38	7.9	78	0.432	875	> 875	
IMS-2WWD-40	3.9	± 10 %	40	7.9	73	0.576	755	> 755	
IMS-2WWD-40	4.7	± 10 %	42	7.9	66	0.787	650	> 650	
IMS-2WWD-40	5.6	± 10 %	42	7.9	62	1.04	565	> 565	
IMS-2WWD-40	6.8	± 10 %	45	7.9	54	1.40	485	> 485	
IMS-2WWD-40	8.2	± 10 %	47	7.9	50	1.68	440	> 440	
IMS-2WWD-40	10	± 10 %	51	7.9	44	2.58	355	> 355	
IMS-2WWD-40	12	± 10 %	51	2.5	39	3.65	300	> 300	
IMS-2WWD-40	15	± 10 %	45	2.5	44	0.862	620	200	FERRITE
IMS-2WWD-40	18	± 10 %	43	2.5	40	1.02	570	175	
IMS-2WWD-40	22	± 10 %	42	2.5	36	1.12	545	160	
IMS-2WWD-40	27	± 10 %	37	2.5	33	1.28	510	155	
IMS-2WWD-40	33	± 10 %	46	2.5	30	1.70	440	150	
IMS-2WWD-40	39	± 10 %	38	2.5	26	1.99	405	145	
IMS-2WWD-40	47	± 10 %	42	2.5	23	2.41	370	140	
IMS-2WWD-40	56	± 10 %	41	2.5	22	2.85	340	130	
IMS-2WWD-40	68	± 10 %	46	2.5	18	3.21	320	120	
IMS-2WWD-40	82	± 10 %	46	2.5	17	3.57	305	115	
IMS-2WWD-40	100	± 10 %	43	2.5	15	4.10	280	100	
IMS-2WWD-40	120	± 10 %	50	0.79	13	5.97	235	80	
IMS-2WWD-40	150	± 10 %	49	0.79	12	7.05	215	68	
IMS-2WWD-40	180	± 10 %	56	0.79	11	8.12	200	64	
IMS-2WWD-40	220	± 10 %	53	0.79	10	14.8	150	60	
IMS-2WWD-40	270	± 10 %	57	0.79	9	16.8	140	58	
IMS-2WWD-40	330	± 10 %	57	0.79	8.5	18.6	130	56	
IMS-2WWD-40	390	± 10 %	57	0.79	8	21.1	120	54	
IMS-2WWD-40	470	± 10 %	50	0.79	7	32.2	100	52	
IMS-2WWD-40	560	± 10 %	50	0.79	6	36.4	95	50	
IMS-2WWD-40	680	± 10 %	56	0.79	5.5	41.1	90	48	
IMS-2WWD-40	820	± 10 %	49	0.79	5	45.0	85	47	
IMS-2WWD-40	1000	± 10 %	49	0.79	4.5	52.0	80	45	

* **Incremental Current:** The DC current required to cause a 5 % reduction in the nominal inductance value.

FEATURES

- Classification is Grade 2, Class B
- Inductance range is 0.10 μH to 1000 μH
- High inductance-to-size ratio
- 0.133" [3.38 mm] diameter by 0.335" [8.51 mm] length
- Subminiature shielded inductor
- Solves special problems in density circuit application



RoHS
COMPLIANT

ELECTRICAL SPECIFICATIONS

Inductance Tolerance: ± 10 % on Q-Meter

Dielectric Strength: 700 VRMS at sea level

Operating Temperature: - 55 °C to + 125 °C

Self-Resonant Frequency: Minimum SRF measured with full length leads on Grid-Dip Meter

Rating: Maximum current based on 1/3 watt dissipation

MECHANICAL SPECIFICATIONS


Terminal Strength: Meets 5 pound pull test

DENSITY SPECIFICATIONS

Weight: 0.50 gram maximum

Shielding: Less than 3 % coupling with two units mounted side by side at 1000 cycles

DIMENSIONS in inches [millimeters]

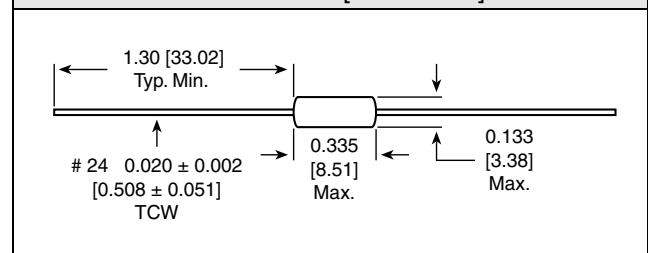


MARKING

- Color coded

ORDERING INFORMATION

IMS-2WWD-40	0.10 μ H	10 %	ER	e2
MODEL	INDUCTANCE VALUE	INDUCTANCE TOLERANCE	PACKAGE CODE	JEDEC LEAD (Pb)-FREE STANDARD

GLOBAL PART NUMBER

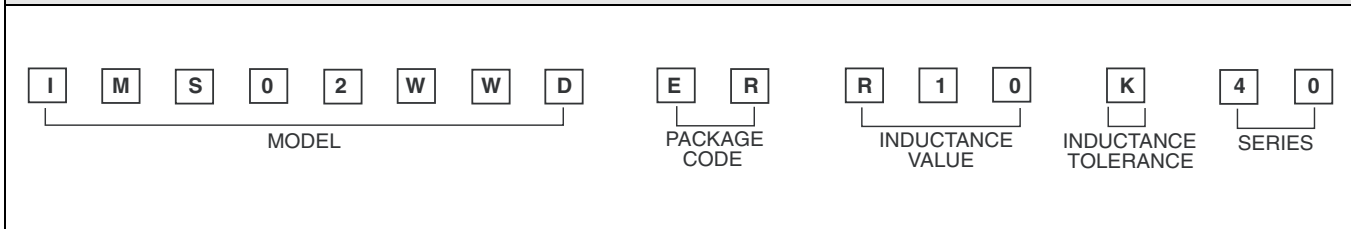



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.