


LIQUID CRYSTAL DISPLAY



LCD for INSTRUMENT


Type No.	Glass Dimension (W×H×T mm)	View Area (W×H mm)	Digits Height (mm)	Terminal			Operating Method	Matching LSI
				Side	Pitch	Number		
SLC-6056	63.5×22.86×1.1	58×12.4	8.0	up down	2.54	25	5V, Static	RCA CD 4055A
SLC-5003R	50.8×30.5×1.1	45.8×17.8	10.16	up down	2.54	20	5V, Static	
SLC-30058	52×27.5×1.1	47×16	10	down	2.54	15	3V, 1/4D, 1/8B	
SLC-30061	50.7×30.4×1.1	46.7×18.4	12.7	up down	2.54	20	5V, Static	Intersil ICL 7106
SLC-40068R	50.8×22.86×1.1	45.72×12.7	8.89	up down	2.54	20	5V, Static	
SLC-40069	50.8×30.48×1.1	45.72×17.78	10.5	up down	2.54	20	5V, Static	

APPLICATION:


- Instrument Devices: Counter, Digital Volt Meter, Scale, Thermometer
- Communication Equipments: Telephone, Wireless Set.
- Medical Equipment: Clinical Thermometer, Pulsemeter, Hemadinamometer

<EXAMPLES>


SLC-6056

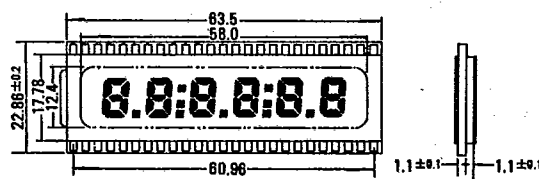


SLC-5003R

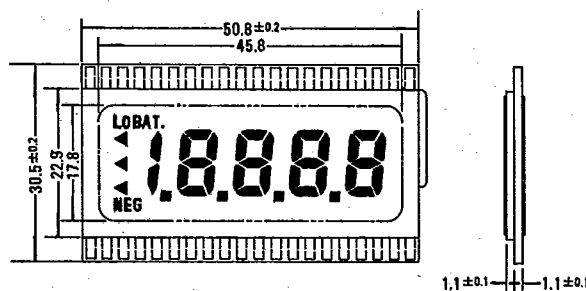


SLC-30058

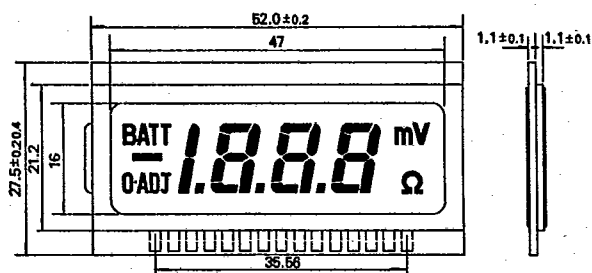

SLC-30061

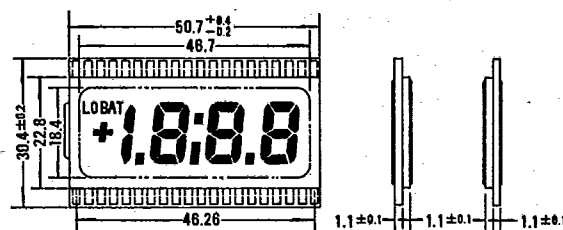

SLC-40068R

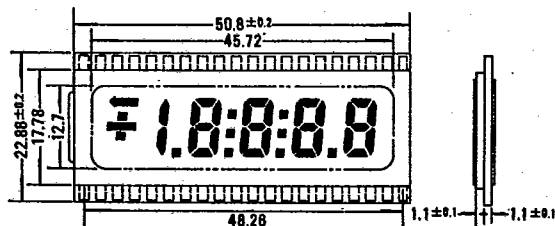

SLC-40069

