


108-769, 108-770

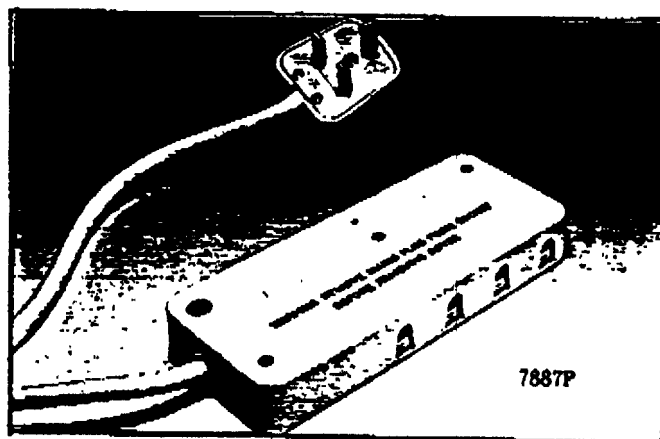

<u>List No.</u>	<u>Description.</u>
	4 Way Multi-daaptor.

Cover and base mouldings are manufactured from a Thermoplastic Polycarbonate material. Appliance cables are retained within the adaptor by a Nylon cleat - a maximum of 4 appliances can be wired into the adaptor at any one time. All current carrying parts are manufactured from Brass and Phosphor bronze. The product is manufactured in accordance with BS5733 and is fitted with 4 ASTA approved 3 Amp fuses complying with BS1362. Maximum rating 13 Amp total. The adaptor can be supplied fitted with a length of BASEC approved cable and 13 Amp resilient plug - manufactured to BS1363/A, or supplied alone.

ASTA Approvals

Multi-daaptor	: ASTA Cert. 9645
	Licence No. 56
Fuse - 3 and 13 Amp	: ASTA Cert. 8656
	Licence No. 15
Resilient Plug	: ASTA Cert. 10754
	Licence No. 98