

MOC3080, MOC3081, MOC3082, MOC3083**OPTICALLY COUPLED BILATERAL
SWITCH LIGHT ACTIVATED ZERO
VOLTAGE CROSSING TRIAC****DESCRIPTION**

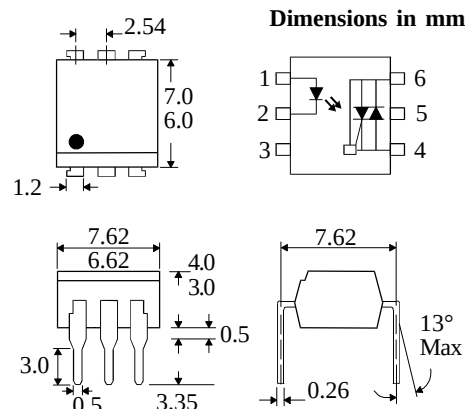
The MOC308_ Series are optically coupled isolators consisting of a Gallium Arsenide infrared emitting diode coupled with a monolithic silicon detector performing the functions of a zero crossing bilateral triac mounted in a standard 6 pin dual-in-line package.

FEATURES

- Options :-
10mm lead spread - add G after part no.
Surface mount - add SM after part no.
Tape&reel - add SMT&R after part no.
- High Isolation Voltage ($5.3kV_{RMS}$, $7.5kV_{PK}$)
- Zero Voltage Crossing
- 800V Peak Blocking Voltage
- All electrical parameters 100% tested
- Custom electrical selections available

APPLICATIONS

- CRTs
- Power Triac Driver
- Motors
- Consumer appliances
- Printers

**ABSOLUTE MAXIMUM RATINGS
(25 °C unless otherwise noted)**

Storage Temperature _____ -40°C - $+150^{\circ}\text{C}$
 Operating Temperature _____ -40°C - $+100^{\circ}\text{C}$
 Lead Soldering Temperature _____ 260°C
 (1.6mm from case for 10 seconds)
 Input-to-output Isolation Voltage (Pk) _____ 7500 Vac
 (60 Hz, 1sec. duration)

INPUT DIODE



Forward Current _____ 50mA
 Reverse Voltage _____ 6V
 Power Dissipation _____ 120mW
 (derate linearly $1.41\text{mW}/^{\circ}\text{C}$ above 25°C)

OUTPUT PHOTO TRIAC

Off-State Output Terminal Voltage _____ 800V
 RMS Forward Current _____ 100mA
 Forward Current (Peak) _____ 1.2A
 Power Dissipation _____ 150mW
 (derate linearly $1.76\text{mW}/^{\circ}\text{C}$ above 25°C)

POWER DISSIPATION

Total Power Dissipation _____ 250mW
 (derate linearly $2.94\text{mW}/^{\circ}\text{C}$ above 25°C)

**OPTION SM
SURFACE MOUNT****OPTION G****ISOCOMCOMPONENTSLTD**

Unit 25B, Park View Road West,
 Park View Industrial Estate, Brenda Road
 Hartlepool, TS25 1YD England Tel: (01429)863609
 Fax: (01429)863581 e-mail sales@isocom.co.uk
<http://www.isocom.com>

ISOCOM INC

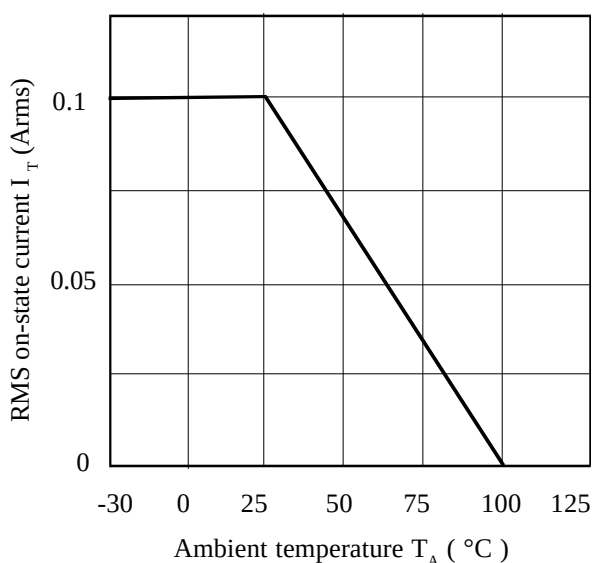
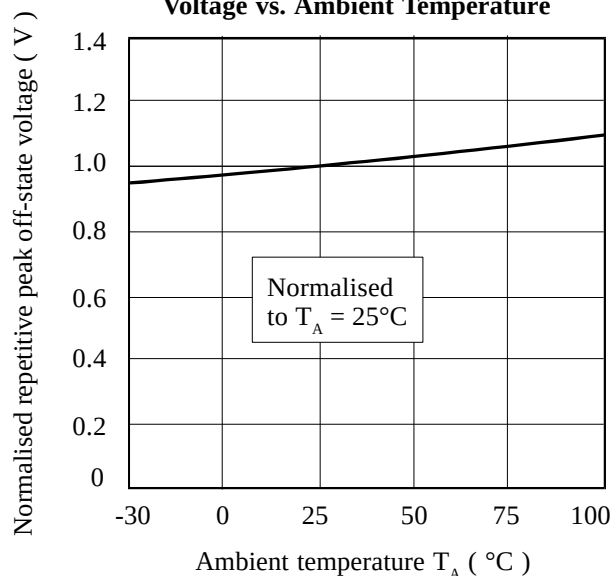
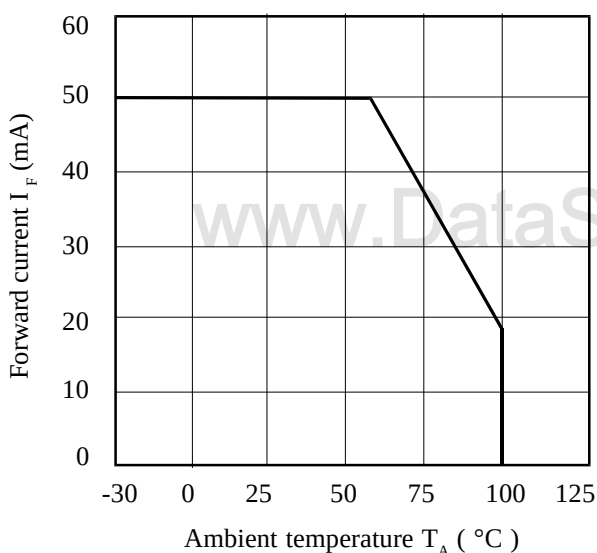
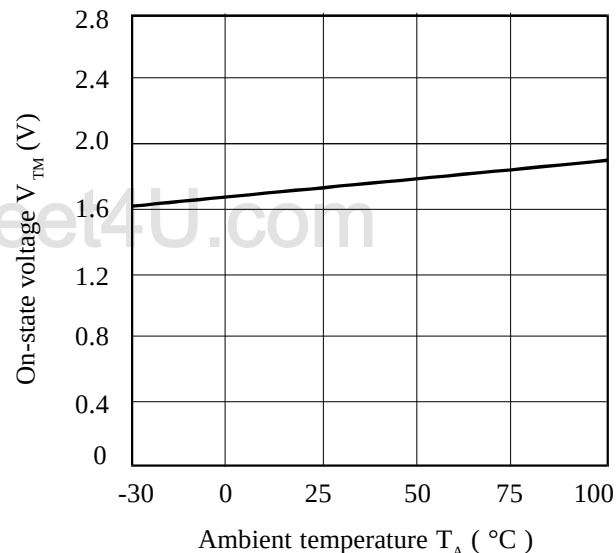
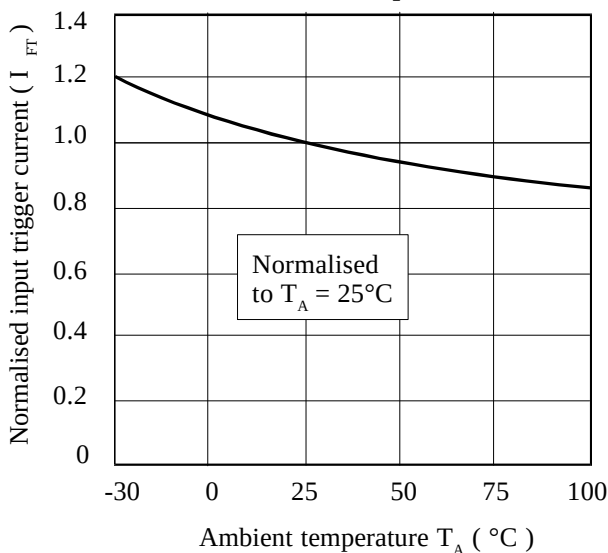
1024 S. Greenville Ave, Suite 240,
 Allen, TX 75002 USA
 Tel: (214)495-0755 Fax: (214)495-0901
 e-mail info@isocom.com
<http://www.isocom.com>

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless otherwise noted)

PARAMETER		MIN	TYP	MAX	UNITS	TEST CONDITION
Input	Forward Voltage (V_F)		1.2	1.5	V	$I_F = 30\text{mA}$
	Reverse Current (I_R)			100	μA	$V_R = 6\text{V}$
Output	Peak Off-state Current (I_{DRM})	800		300	nA	$V_{\text{DRM}} = 800\text{V}$ (note 1)
	Peak Blocking Voltage (V_{DRM})				V	$I_{\text{DRM}} = 300\text{nA}$
	On-state Voltage (V_{TM})		1.8	3.0	V	$I_{\text{TM}} = 100\text{mA}$ (peak)
	Critical rate of rise of off-state Voltage (dv/dt)	100			V/ μs	
Coupled	Input Current to Trigger (I_{FT}) (note 2)	5300 7500	100			$V_{\text{TM}} = 3\text{V}$ (note 2)
	MOC3080			30	mA	
	MOC3081			15	mA	
	MOC3082			10	mA	
Coupled	MOC3083			5	mA	
	Holding Current , either direction (I_H)				μA	See note 3 See note 3
	Input to Output Isolation Voltage V_{ISO}				V_{RMS}	
					V_{PK}	
Zero Crossing Characteristic	Inhibit Voltage (V_{IH})			35	V	$I_F = \text{Rated } I_{\text{FT}}$ MT1-MT2 Voltage above which device will not trigger $I_F = \text{Rated } I_{\text{FT}}$ $V_{\text{DRM}} = 800\text{V}$ off-state
	Leakage in Inhibited State (I_s)			500	μA	

Note 1. Guaranteed to trigger at an I_F value less than or equal to max. I_{FT} , recommended I_F lies between Rated I_{FT} and absolute max. I_F .

Note 2. Measured with input leads shorted together and output leads shorted together.

RMS On-state Current vs. Ambient Temperature**Normalised Repetitive Peak Off-state Voltage vs. Ambient Temperature****Forward Current vs. Ambient Temperature****On-state Voltage vs. Ambient Temperature****Normalised Input Trigger Current vs. Ambient Temperature****On-state Current vs. On-state Voltage**