

E-Series RF 1:1 Transformer

200 - 800 MHz

ETC1-1T-7

V3.00


Features

- 1:1 Impedance Ratio

Specifications @ 25°C

Frequency Range	200 - 800 MHz
Insertion Loss	Maximum
200 - 800 MHz	2 dB
Amplitude Imbalance	Maximum
200 - 800 MHz	1 dB
Phase Imbalance	Maximum
200 - 800 MHz	10°

Schematic

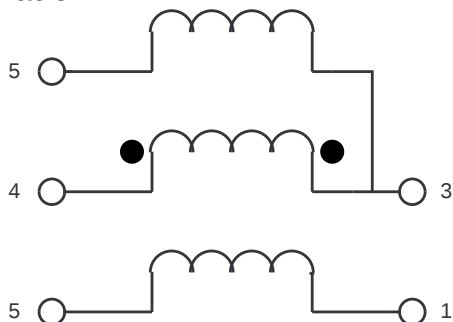

Ordering Information


Part No.
ETC1-1T-7
ETC1-1T-7TR

Packaging
Tubes
Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

SM-22

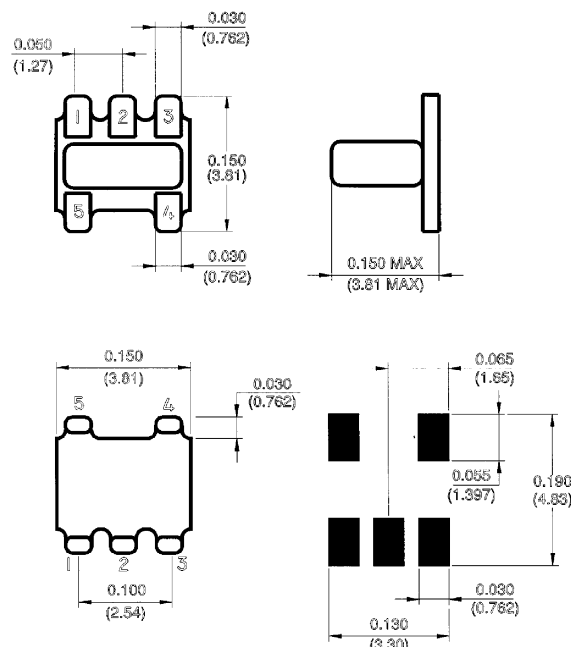

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Primary dot	5
Primary	4
Secondary dot	1
Secondary	3
Not Connected	2

S0951 B

Specifications Subject to Change Without Notice.

M/A-COM, Inc.

North America: Tel. (800) 366-2266
Fax (800) 618-8883

■ Asia/Pacific: Tel. +81 (03) 3226-1671
Fax +81 (03) 3226-1451

■ Europe: Tel. +44 (1344) 869 595
Fax +44 (1344) 300 020