



1/2 (12.7mm) SNAP-IN PANEL MOUNT LEDs

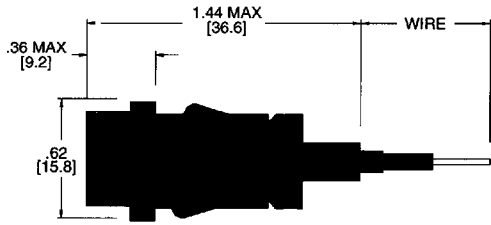

**PF50-W
PF52-W
PF56-W
PF5012-W**

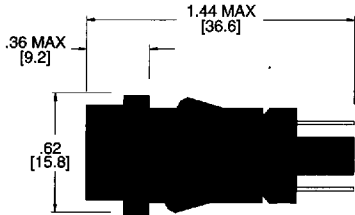

**PF50-T
PF52-T
PF56-T
PF5012-T**

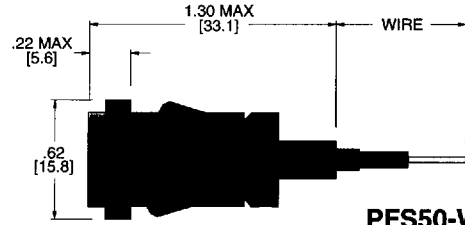


FIG 2

**PFS50-W
PFS52-W
PFS56-W
PFS5012-W**






FIG 2A

**PFS50-T
PFS52-T
PFS56-T
PFS5012-T**

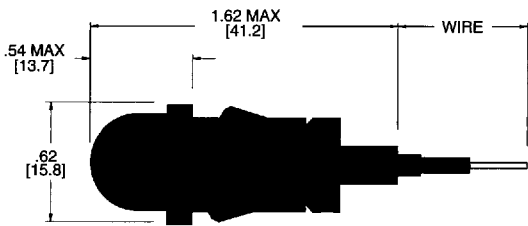

**PD50-W
PD52-W
PD56-W
PD5012-W**

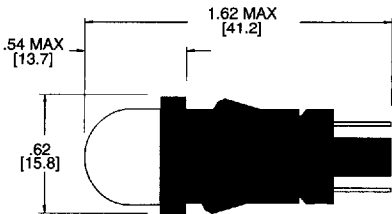

**PD50-T
PD52-T
PD56-T
PD5012-T**


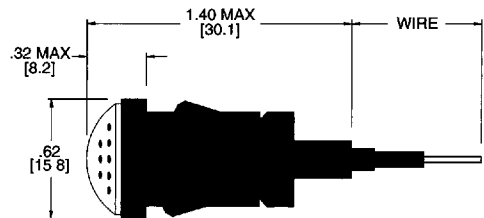


FIG 3


PD5018-W

OPTIONAL MOUNTING HARDWARE




1/2 (12.7mm) SNAP-IN PANEL MOUNT LEDs

PART NUMBER SELECTION GUIDE

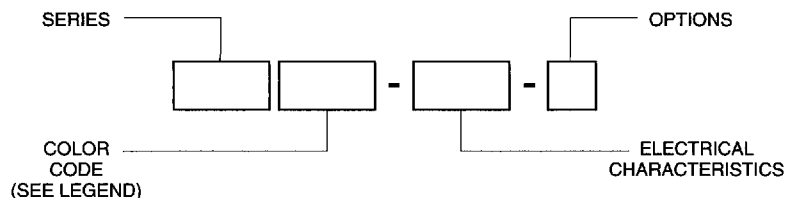

COLOR CODE LEGEND

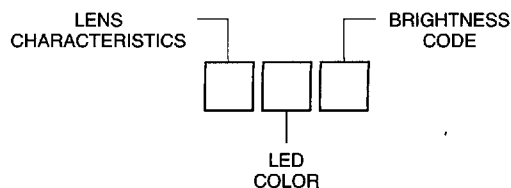

STANDARD	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP PD50 PF50 PFS50	CR5 CY5 CG5	VDC 2Vf 6V 14V 28V 48V	VAC 120VAC	T - WIRE TERMINAL W6 - 6" WIRE
	6 MULTICHIP PD56 PF56 PFS56	CR6 CY6 CG6	VDC 4Vf 6V 14V 28V 48V	VAC 120VAC	

LENS CHARACTERISTICS	LED COLOR	BRIGHTNESS CODE
C-CLEAR T-TRANSLUCENT TW-TRANSLUCENT WHITE	R-RED Y-YELLOW G-GREEN B-BLUE O-ORANGE LW-LIME WHITE W-WHITE RG-RED/GREEN YG-YELLOW/GREEN	4-STANDARD 5-STANDARD 6-HIGH INTENSITY 7-HIGH INTENSITY 900-HIGH INTENSITY 3K-HIGH INTENSITY N-NEON

PART SPECIFICATIONS

- PART NUMBERS CONSISTING OF OPTIONS NOT FOUND IN THE STANDARD BOX ARE CUSTOM.
- FOR COMPLETE PART NUMBER SELECT ONE OPTION FROM EACH OF THE FOUR COLUMNS FROM LEFT TO RIGHT.
- BRIGHTNESS CODES LISTED ARE SET BY THE FACTORY FOR ALL COLORS. THE ABOVE CHART IS FOR REFERENCE ONLY.
- MOUNTING DIAMETER 0.500 (12.7mm) TO 0.505 (12.8mm).
- PANEL THICKNESSES FROM 0.070 (1.8mm) TO 0.125 (3.2mm).
- HOUSING MATERIAL IS BLACK NYLON UL 94V-2.
- WIRE LEADS ARE RED FOR ANODE AND BLACK FOR CATHODE.
- TERMINALS ARE 3/16 (4.8mm) QUICK DISCONNECT.

CUSTOM	SERIES	COLOR CODE	ELECTRICAL CHARACTERISTICS		OPTIONS
	SINGLE CHIP PD50 PF50 PFS50	CR900 CY3K CG6 CO5 CB5 TWRG4 - BICOLOR TWYG4 - BICOLOR	VDC 5V 12V 24V 36V 60V	VAC 5VAC 6VAC 12VAC 14VAC 24VAC 28VAC 36VAC 48VAC 60VAC	W12 - 12" WIRE W18 - 18" WIRE W24 - 24" WIRE
	DUAL CHIP PD52 PF52 PFS52	CR5 CY5 CG5 CR3K CY3K CO5 CB5			
	6 MULTICHIP PD56 PF56 PFS56	CO6 CB6 CLW6 CW6 CR7 CY3K			
	12 MULTICHIP PD5012 PF5012 PFS5012				
	18 MULTICHIP PD5018				
	NEONS PD50 PF50	CRN CON CAN CGN CBN CWN TWN	VAC 120VAC 220VAC		