


ENCLOSURES

Plastic enclosures

Protection to IP65

All fixing holes: 6mm

Knockout conduit entries: 20mm

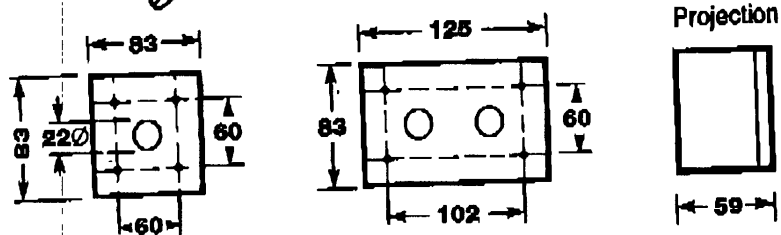


Steel enclosures

Protection to IP56

All fixing holes: 5mm


Knockout conduit entries: 20mm

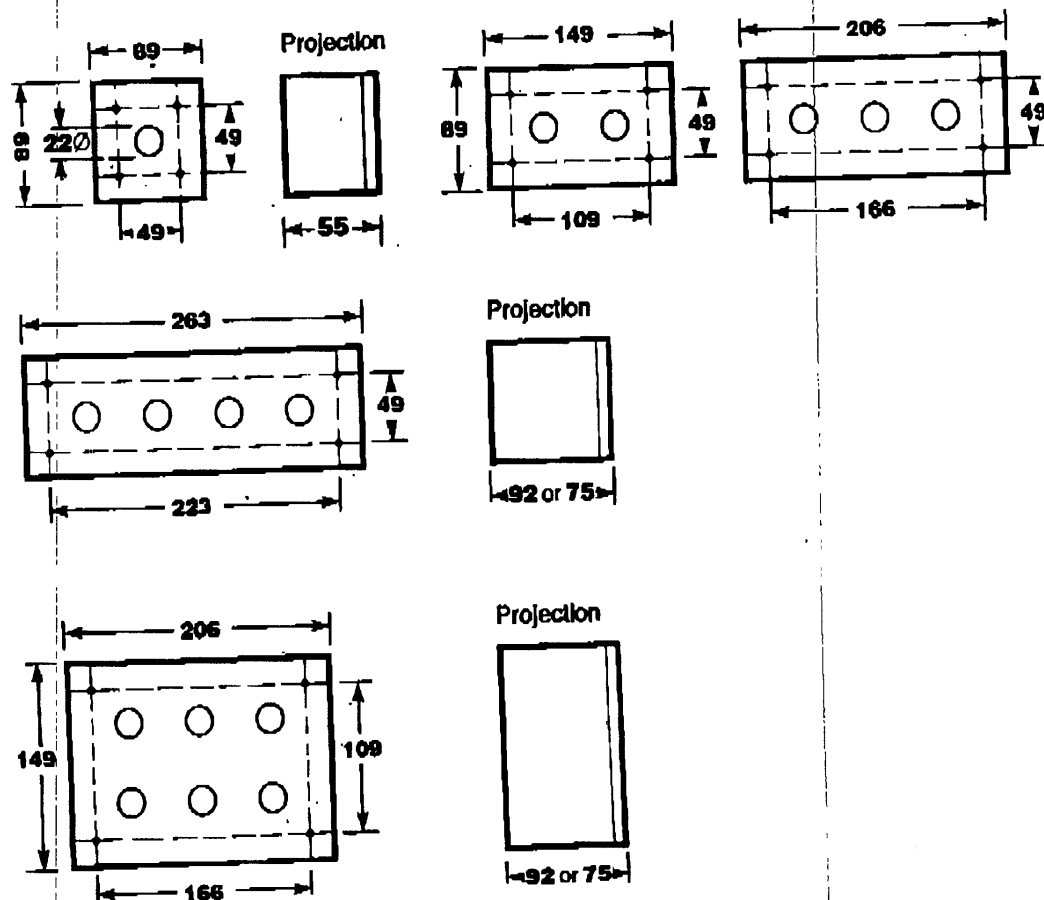

OPERATORS


Mounting dimensions

Mounting hole




For plain Ø 22.5mm holes the 'pip' can be removed from 44 series operators

Minimum mounting distances

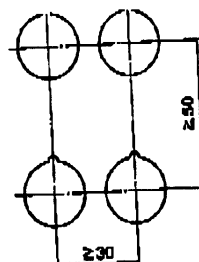


Standard/Extended actuators


Standard




Extended




With extended bezel

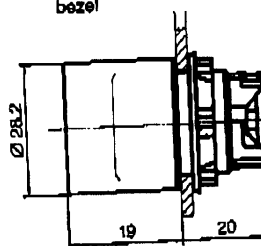


Interlocking actuator




Dual on/off actuator




Hand operated switch




Key operated switch




Two position



Three position



Two position



Three position

