



T-1 $\frac{3}{4}$ (5mm) SOLID STATE LAMPS

LTL-4203

RED

LTL-4213/307P

BRIGHT RED

LTL-4223/307E

HIGH EFFICIENCY RED

LTL-4233/307G

GREEN

LTL-4253/307Y

YELLOW

LTL-4294/307EA

ORANGE

T-41-21

FEATURES

- LOW POWER CONSUMPTION.
- HIGH EFFICIENCY.
- VERSATILE MOUNTING ON P.C. BOARD OR PANEL.
- I.C. COMPATIBLE/LOW CURRENT REQUIREMENTS.
- POPULAR T-1 $\frac{3}{4}$ DIAMETER, 1" LEAD LENGTH.
- RELIABLE AND RUGGED.
- LOW COST.


DESCRIPTION

The Red source color devices are made with Gallium Arsenide Phosphide on Gallium Arsenide Red Light Emitting Diode.


The Bright Red source color devices are made with Gallium Phosphide on Gallium Phosphide Red Light Emitting Diode.

The High Efficiency Red and Orange source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Orange Light Emitting Diode. The Green source color devices are made with Gallium Phosphide on Gallium Phosphide Green Light Emitting Diode.

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

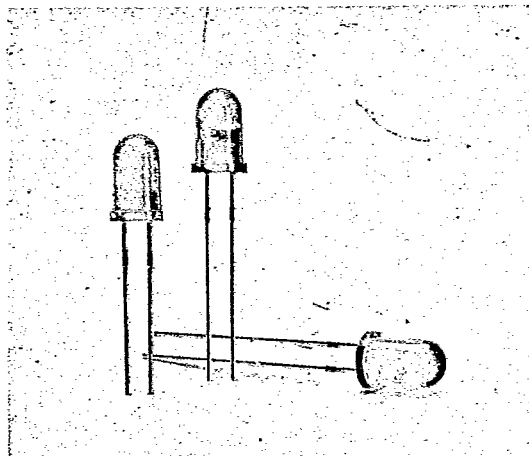

PACKAGE DIMENSIONS

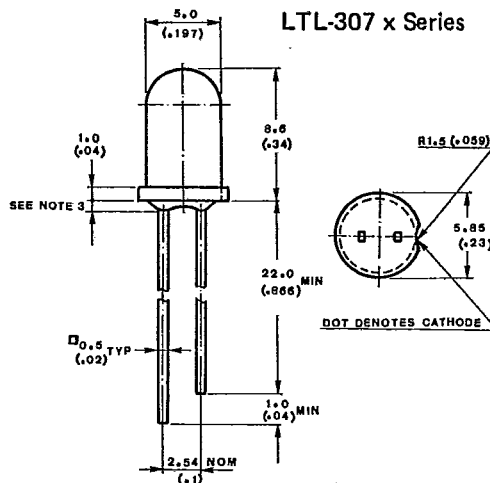

NOTES:


1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25\text{mm}$ (.010") unless otherwise noted.
3. Protruded resin under flange is 1.5mm (.059") max.
4. Lead spacing is measured where the leads emerge from the package.
5. Specifications are subject to change without notice.



2-134

413

LTL-42x3/42x4 Series

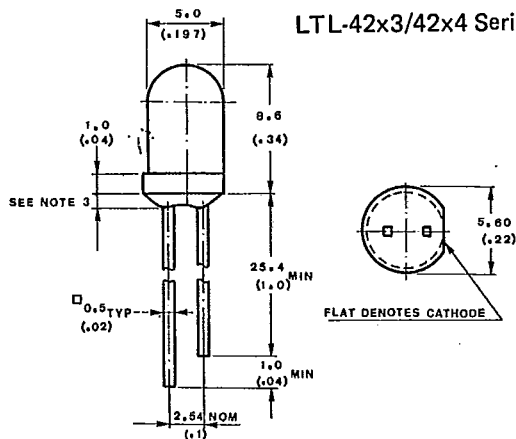

T-41-21

DEVICES

PART NO. LTL-	LENS		SOURCE COLOR
	COLOR	DIFFUSION	
4203	Red	Diffused	Red
4204	Red	Transparent	
4208	Water Clear	Non-Diffused	
4213	Red	Diffused	Bright Red
4214		Transparent	
4223	Red	Diffused	Hi. Eff. Red
4224		Transparent	
4233	Green	Diffused	Green
4234		Transparent	
4253	Yellow	Diffused	Yellow
4254		Transparent	
4293	Orange	Diffused	Orange
4294		Transparent	

PART NO. LTL-	LENS		SOURCE COLOR
	COLOR	DIFFUSION	
307P	Red	Diffused	Bright Red
307PE		Transparent	
307E	Red	Diffused	Hi. Eff. Red
307EE		Transparent	
307G	Green	Diffused	Green
307GE		Transparent	
307Y	Yellow	Diffused	Yellow
307EA	Orange	Diffused	Orange

ABSOLUTE MAXIMUM RATINGS AT TA = 25°C

PARAMETER	RED	BRIGHT RED	GREEN	YELLOW	HI. EFF. RED ORANGE	UNIT
Power Dissipation	80	40	100	60	100	mW
Peak Forward Current (1/10 Duty Cycle, 0.1ms Pulse Width)	200	60	120	80	120	mA
Continuous Forward Current	40	15	30	20	30	mA
Derating Linear From 25°C	0.5	0.2	0.4	0.25	0.4	mA/°C
Reverse Voltage	5	5	5	5	5	V
Operating Temperature Range	-55°C to +100°C					
Storage Temperature Range	-55°C to +100°C					
Lead Soldering Temperature [1.6mm (0.063in) From Body]	260°C for 5 Seconds					

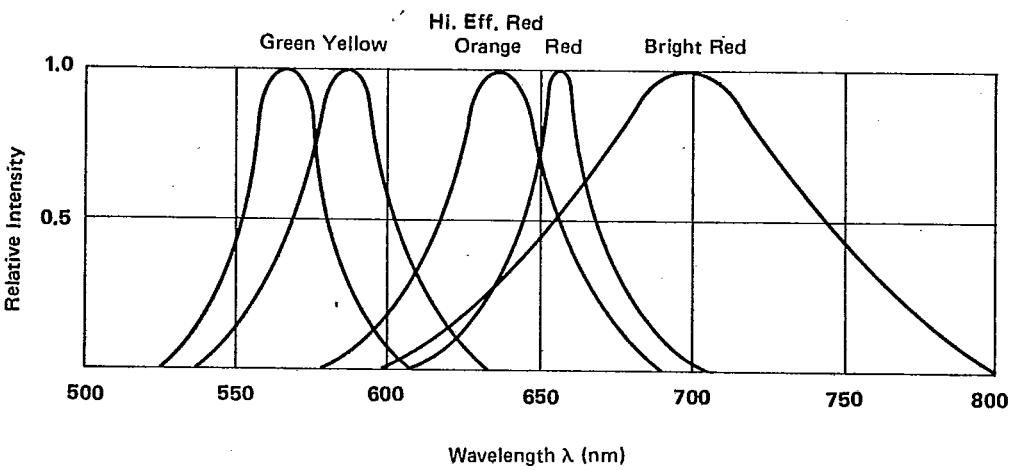


FIG. 1 RELATIVE INTENSITY VS. WAVELENGTH

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	I_v	4203 4204 4208	0.3 1.7 1.7	0.8 5.5 5.5		mcd	$I_F = 10\text{ mA}$ Note 1
Viewing Angle	$2\theta_{1/2}$	4203 4204 4208		36 16 16		deg.	Note 2 (Fig. 6)
Peak Emission Wavelength	λ_{PEAK}			655		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	$\Delta\lambda$			24		nm	
Forward Voltage	V_F			1.7	2.0	V	$I_F = 20\text{ mA}$
Reverse Current	I_R				100	μA	$V_R = 5\text{ V}$
Capacitance	C			30		PF	$V_F = 0$ $f = 1\text{ MHz}$

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 2 FORWARD CURRENT VS. FORWARD VOLTAGE.




FIG. 3 FORWARD CURRENT DERATING CURVE.

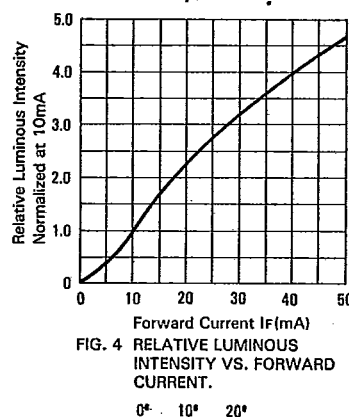


FIG. 4 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

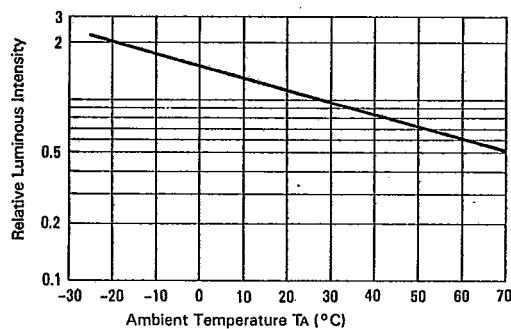


FIG. 5 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 6 SPATIAL DISTRIBUTION



ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT TA = 25°C

PARAMETER	SYMBOL	PART NO. LTL—	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	Iv	4213 4214 4223 4224	1.1 2.5 2.5 10.0	3.8 12.6 8.7 40.0		mcd	IF = 10mA Note 1
Viewing Angle	2θ½	4213 4214 4223 4224		36 16 36 16		deg.	Note 2 (Fig. 11)
Peak Emission Wavelength	λPEAK	4213 4214 4223 4224		697 697 635 635		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ	4213 4214 4223 4224		90 90 40 40		nm	
Forward Voltage	VF	4213 4214 4223 4224		2.1 2.1 2.0 2.0	2.8	V	IF = 20mA
Reverse Current	IR	4213 4214 4223 4224			100	μA	VR = 5 V
Capacitance	C	4213 4214 4223 4224		55 55 20 20		PF	V = 0 f = 1MHZ

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
2. θ½ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 7 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 8 FORWARD CURRENT DERATING CURVE




FIG. 9 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

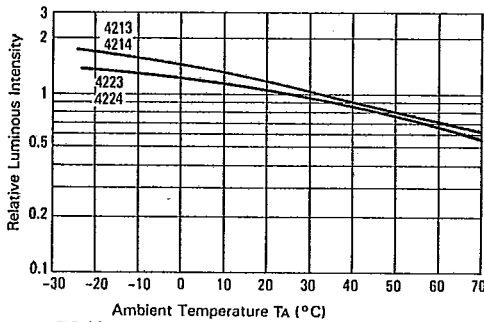


FIG.10 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 11 SPATIAL DISTRIBUTION

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	I_v	4233 4234 4238	2.5 10.0 29.0	8.7 40.0 60.0		mcd	$I_F = 10\text{mA}$ Note 1
Viewing Angle	$2\theta_{1/2}$	4233 4234 4238		36 16 16		deg.	Note 2 (Fig. 16)
Peak Emission Wavelength	λ_{PEAK}	4233 4234 4238		565		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	$\Delta\lambda$	4233 4234 4238		30		nm	
Forward Voltage	V_F	4233 4234 4238		2.1	2.8	V	$I_F = 20\text{mA}$
Reverse Current	I_R	4233 4234 4238			100	μA	$V_R = 5\text{V}$
Capacitance	C	4233 4234 4238		35		PF	$V_F = 0$ $f = 1\text{MHz}$

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 12 FORWARD CURRENT VS. FORWARD VOLTAGE.




FIG. 13 FORWARD CURRENT DERATING CURVE.

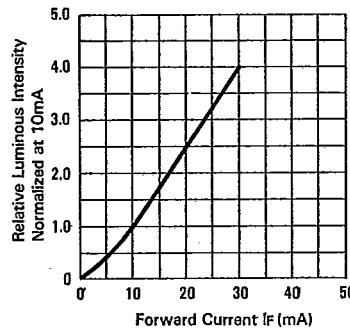


FIG. 14 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

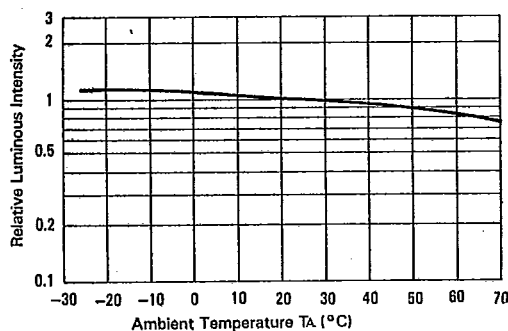


FIG. 15 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 16 SPATIAL DISTRIBUTION



ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT T = 25°C

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	IV	4253 4254 4258	2.5 10.0 10.0	8.7 40.0 40.0		mcd	IF = 10mA Note 1
Viewing Angle	2θ½	4253 4254 4258		36 16 16		deg.	Note 2 (Fig. 21)
Peak Emission Wavelength	λPEAK	4253 4254 4258		585		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ	4253 4254 4258		35		nm	
Forward Voltage	VF	4253 4254 4258		2.1	2.8	V	IF = 20mA
Reverse Current	IR	4253 4254 4258			100	μA	VR = 5 V
Capacitance	C	4253 4254 4258		15		PF	VF = 0 f = 1MHZ

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
2. θ½ is the off axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 17 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 18 FORWARD CURRENT DERATING CURVE

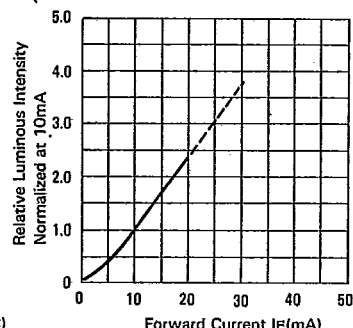


FIG. 19 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

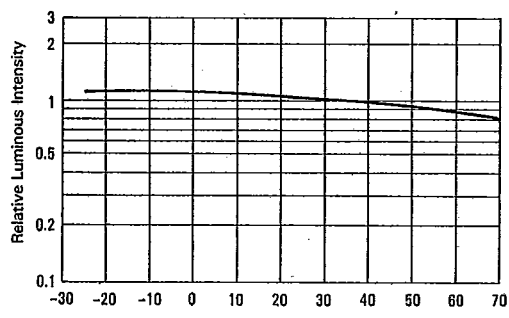


FIG. 20 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 21 SPATIAL DISTRIBUTION

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT TA = 25°C

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	Iv	4293	2.5	8.7		mcd	IF = 10 mA Note 1
		4294	10.0	40.0			
		4298	10.0	40.0			
Viewing Angle	2θ½	4293		36		deg.	Note 2 (Fig. 26)
		4294		16			
		4298		16			
Peak Emission Wavelength	λPEAK			630		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	Δλ			40		nm	
Forward Voltage	VF			2.0	2.8	V	IF = 20 mA
Reverse Current	IR				100	μA	VR = 5V
Capacitance	C			20		PF	VF = 0 f = 1 MHZ

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.
2. θ½ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 22 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 23 FORWARD CURRENT DERATING CURVE

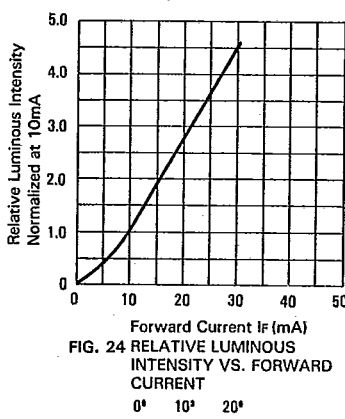


FIG. 24 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

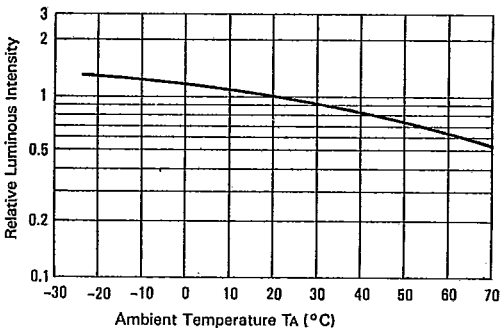


FIG. 25 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 26 SPATIAL DISTRIBUTION



ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	I_V	307P 307PE 307E 307EE	1.1 2.5 5.6 9.0	5.6 9.0 19.0 30.3		mcd	$I_F = 10\text{mA}$ Note 1
Viewing Angle	$2\theta_{1/2}$	307P 307PE 307E 307EE		50° 40° 50° 40°		deg.	Note 2 (Fig. 31)
Peak Emission Wavelength	λ_{PEAK}	307P 307PE 307E 307EE		697 697 635 635		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	$\Delta\lambda$	307P 307PE 307E 307EE		90 90 40 40		nm	
Forward Voltage	V_F	307P 307PE 307E 307EE		2.1 2.1 2.0 2.0	2.8	V	$I_F = 20\text{mA}$
Reverse Current	I_R	307P 307PE 307E 307EE			100	μA	$V_R = 5\text{V}$
Capacitance	C	307P 307PE 307E 307EE		55 55 20 20		PF	$V_F = 0$ $f = 1\text{MHz}$

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 27 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 28 FORWARD CURRENT DERATING CURVE

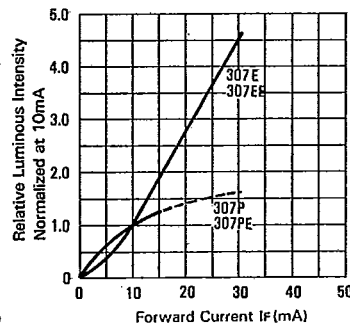


FIG. 29 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

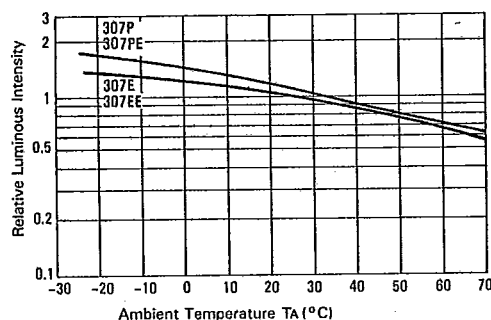


FIG. 30 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 31 SPATIAL DISTRIBUTION

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	PART NO. LTL—	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	I_v	307G 307GE 307Y	4.0 8.7 4.0	12.6 29.0 12.6		mcd	$I_F = 10\text{ mA}$ Note 1
Viewing Angle	$2\theta_{1/2}$	307G 307GE 307Y		50 40 50		deg.	Note 2 (Fig. 36)
Peak Emission Wavelength	λ_{PEAK}	307G 307GE 307Y		565 565 585		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	$\Delta\lambda$	307G 307GE 307Y		30 30 35		nm	
Forward Voltage	V_F	307G 307GE 307Y		2.1	2.8	V	$I_F = 20\text{ mA}$
Reverse Current	I_R	307G 307GE 307Y			100	μA	$V_R = 5\text{ V}$
Capacitance	C	307G 307GE 307Y		35 35 15		PF	$V_F = 0$ $f = 1\text{ MHz}$

NOTES: 1. Luminous Intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 32 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 33 FORWARD CURRENT DERATING CURVE




FIG. 34 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

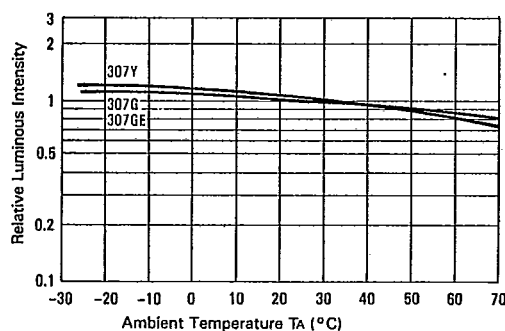


FIG. 35 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 36 SPATIAL DISTRIBUTION

2-142

421

ELECTRICAL/OPTICAL CHARACTERISTICS AND CURVES AT $T_A = 25^\circ\text{C}$

PARAMETER	SYMBOL	PART NO. LTL-	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Luminous Intensity	I_v	307EA	5.6	19.0		mcd	$I_F = 10\text{ mA}$ Note 1
Viewing Angle	$2\theta_{1/2}$	307EA		50		deg.	Note 2 (Fig. 41)
Peak Emission Wavelength	λ_{PEAK}			630		nm	Measurement @ Peak (Fig. 1)
Spectral Line Half Width	$\Delta\lambda$			40		nm	
Forward Voltage	V_F			2.0	2.8	V	$I_F = 20\text{ mA}$
Reverse Current	I_R				100	μA	$V_R = 5\text{ V}$
Capacitance	C			20		PF	$V_F = 0$ $f = 1\text{ MHz}$

NOTES: 1. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commission Internationale De L'Eclairage) eye-response curve.

2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.




FIG. 37 FORWARD CURRENT VS. FORWARD VOLTAGE




FIG. 38 FORWARD CURRENT DERATING CURVE

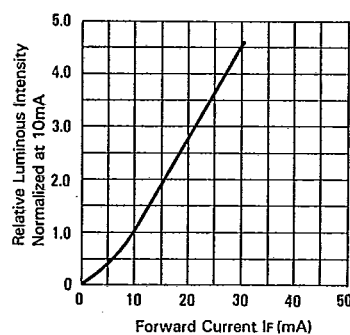


FIG. 39 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

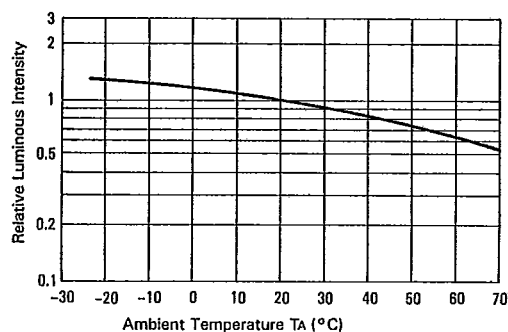


FIG. 40 LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE




FIG. 41 SPATIAL DISTRIBUTION