

E-Series Coupler

5 - 1000 MHz

ESDC-20-2-75

V3.00

Features

- Coupling: +20 dB Typical
- Surface Mount

Specifications @ 25°C

Frequency Range	5 - 1000 MHz	
Coupling	Nominal	Flatness
5 - 1000 MHz	20 ±1 dB	0.8 dB
Main Line Loss	Typical	Maximum
5 - 50 MHz	0.3 dB	0.6 dB
50 - 500 MHz	0.4 dB	0.8 dB
500 - 1000 MHz	0.5 dB	1.1 dB
Directivity	Typical	Minimum
5 - 50 MHz	30 dB	23 dB
50 - 500 MHz	20 dB	12 dB
500 - 1000 MHz	12 dB	6 dB
Return Loss	Typical	Minimum
	25 dB	20 dB

Operating Characteristics

Impedance	75 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
ESDC-20-2-75	Tube
ESDC-20-2-75TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating/Storage Temp.	-20°C to +85°C

SM-1

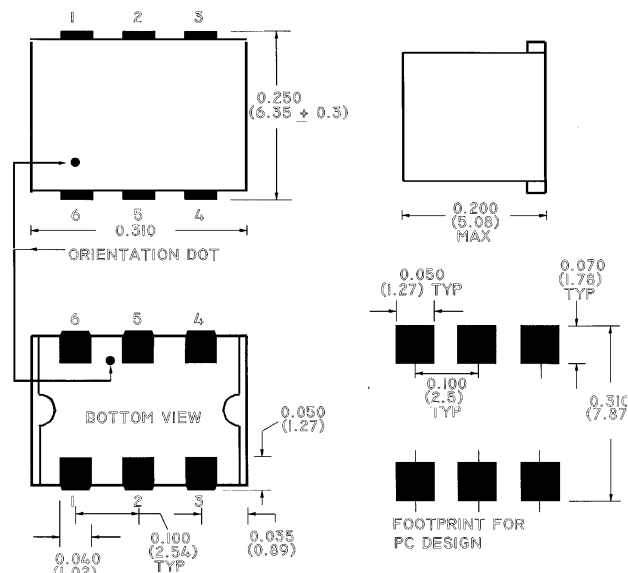

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin. No.
Input	6
Output	1
Coupled	4
Ground	5
Case Ground	5
External 75 Ohms	3
Not Connected	2

S 0956 C