


WORLDWIDE



3990A Series Panel Mounted LED Indicator

DESCRIPTION AND FEATURES

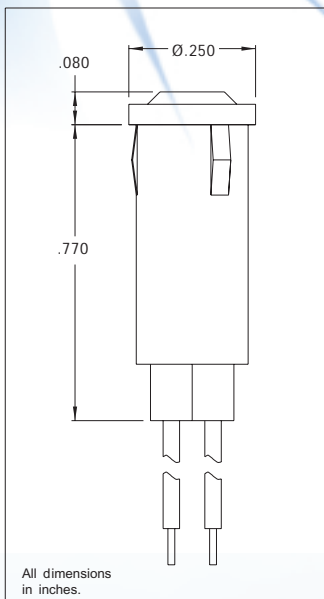

Features

Mounting: Will snap-fit in Ø.217/.221 hole in panels .031/.062 thick.

Wire Leads: No.24 AWG, 4.4/4.8 long, stripped .430/.570

Anode(+): Red lead

Housing: White nylon

Lens: Polycarbonate

ELECTRO-OPTICAL CHARACTERISTICS

Part Number	Color	Typ. Intensity (mcd)	Rated Current (mA)	Continuous Forward Current Max. (mA)	Forward Voltage Typ. (V)	Forward Voltage Max. (V)	Peak Forward Current @1ms-300pps (A)	Reverse Break-down Voltage Min. (V)
3990A1	Red	10	10	30	2.0	3.0	1.0	5
3990A3	Amber	7	10	30	2.2	3.0	.09	5
3990A5	Green	16	10	30	2.2	3.0	.09	5
3990A7	Yellow	6.3	10	30	2.1	3.0	1.0	5
3991A6-5V	Blue	Use #680 Incandescent Lamp-5V , .06A, 200,000 Hours						



America:
 CML Innovative Technologies, Inc.
 147 Central Avenue
 Hackensack, NJ 07601 -USA
 Tel:1-201-489 -8989
 Fax:1-201-489 -6911
 e-mail:americas@cml-it.com

Europe:
 CML Technologies GmbH &Co.KG
 Robert-Bunsen-Str.1
 67098 Bad Dürkheim -GERMANY
 Tel:+49 (0)6322 9567-0
 Fax:+49 (0)6322 9567-88
 e-mail:europe@cml-it.com

Asia:
 CML Innovative Technologies, Inc.
 61 Aida Street
 Singapore 459975
 Tel:(65)9630 -5003
 e-mail:asia@cml-it.com