


200 V - 1,000 V Single Phase Bridge

1.4 A - 1.5 A Forward Current

70 ns - 3000 ns Recovery Time


1102F - 1110F
1102FF - 1110FF
1102UFF - 1110UFF



ELECTRICAL CHARACTERISTICS AND MAXIMUM RATINGS

Part Number	Working Reverse Voltage (V _{rw})	Average Rectified Current @TC (I _o)		Reverse Current @ V _{rw} (I _r)		Forward Voltage (V _f)		1 Cycle Surge Current tp=8.3ms (I _{fsm})	Repetitive Surge Current (I _{frm})	Reverse Recovery Time (1) (T _{rr})	Thermal Impd. θ _{J-c}
		55°C	100°C	25°C	100°C	25°C	Amps	25°C	25°C	25°C	°C/W
		Amps	Amps	µA	µA	Volts		Amps	Amps	ns	
1102F 1106F 1110F	200 600 1000	1.5 1.5 1.5	1.0 1.0 1.0	1.0 1.0 1.0	25 25 25	1.1 1.1 1.1	1.0 1.0 1.0	50 50 50	10 10 10	3000 3000 3000	22.5 22.5 22.5
1102FF 1106FF 1110FF	200 600 1000	1.5 1.5 1.5	1.0 1.0 1.0	1.0 1.0 1.0	25 25 25	1.3 1.3 1.3	1.0 1.0 1.0	25 25 25	6.0 6.0 6.0	150 150 150	22.5 22.5 22.5
1102UFF 1106UFF 1110UFF	200 600 1000	1.4 1.4 1.4	0.9 0.9 0.9	1.0 1.0 1.0	25 25 25	1.7 1.7 1.7	1.0 1.0 1.0	25 25 25	5.0 5.0 5.0	70 70 70	22.5 22.5 22.5

(1)T_{rr} Testing: I_f=0.5A, I_r=1.0A, I_{rr}=0.25A *Op. Temp.= -55°C to +150°C Stg. Temp.= -55°C to +150°C

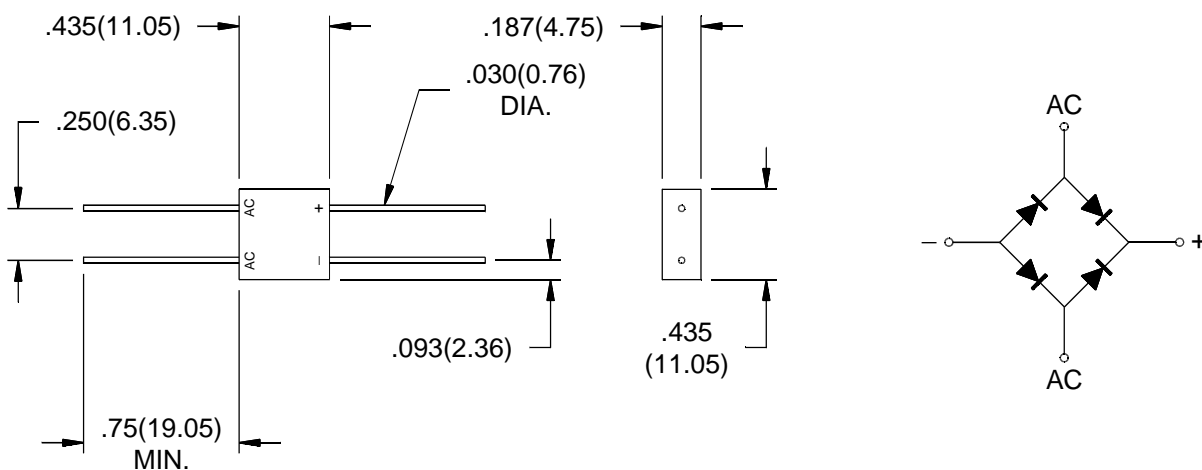

Dimensions: In. (mm) • All temperatures are ambient unless otherwise noted. • Data subject to change without notice.



VOLTAGE MULTIPLIERS INC.
 8711 W. Roosevelt Ave.
 Visalia, CA 93291

TEL 559-651-1402
 FAX 559-651-0740
www.voltagemultipliers.com

1102F - 1110F • 1102FF - 1110FF • 1102UFF - 1110UFF

