

FEATURES AND SPECIFICATIONS

Features

- For low volume users
- Utilizes modules from Molex hand tool
- Includes foot pedal and filter for air supply line

Specifications

Size: Width—180mm (7")
 Depth—75mm (3")
 Height—100mm (4")
 Weight: 0.9kg (2 lb)
 Pneumatics: Pressure—4 BAR (60psig)
 Consumption—2.8L per minute (0.1 CFM)
 Rate: Up to 750 cycles per hour, dependent on operator speed and application




Insulation Displacement Technology Tooling Pneumatic Hand Tool Adapters

Low Force for Single Wire Feed-To Modules

ORDERING INFORMATION

Description	Order No.		Use with Molex Connector
	Module	Adapter	
For 2.50mm (.098") and 2.54mm (.100") pitch connectors	11-21-5197	11-20-0739	7720, 7745, 7795, 8951, 40775, 40798, 40922
For 2.50mm (.098") pitch connectors	11-31-8939	11-20-0739	42219, 42254
For 2.54mm (.100") pitch connectors	11-21-8365	11-20-0739	40555
For 3.96mm (.156") pitch connectors	11-21-5196	11-20-0739	7674, 7675, 8633, 40119, 40749, 40791, 40915, 41101
For 5.00mm (.197") and 5.08mm (.200") pitch connectors	69008-0270	11-20-0739	7823, 7933, 7935

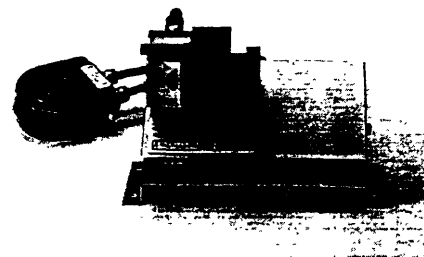

FEATURES AND SPECIFICATIONS

Features

- For low volume users
- Utilizes modules from Molex hand tool that require high force and/or feed-through terminations
- Allows user to position module in various orientations
- Clamps to workbench (up to 3" thick)

Specifications

Size: Width—130mm (5")
 Depth—180mm (7")
 Height—330mm (13")
 Weight: 3.2kg (7 lb)
 Pneumatics: Pressure—4 BAR (60psig)
 Consumption—6L per minute (0.2 CFM)
 Rate: Up to 750 cycles per hour, dependent on operator speed and application

High Force for Ribbon Cable and Mass Terminating Modules

ORDERING INFORMATION

Description	Order No.		Use with Molex Connector
	Module	Adapter	
For 2.54mm (.100") pitch connectors	11-31-7597	11-31-1570	70400, 70475, 90187
Module for 5.08mm (.200") pitch connector	11-21-9756	11-31-1570	70156
Module for 5.08mm (.200") pitch connector	11-32-6027	11-31-1570	71156
Module for Mini-Fit 1DT	11-39-0303	11-31-1570	71694, 71690

