




UNC #4-40 Hexscrew

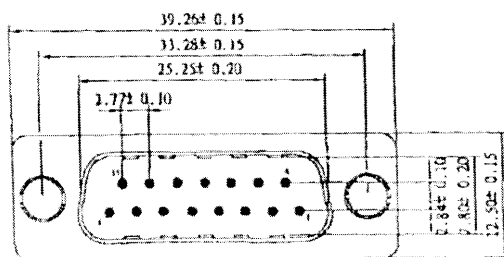

VIDEK LTD.

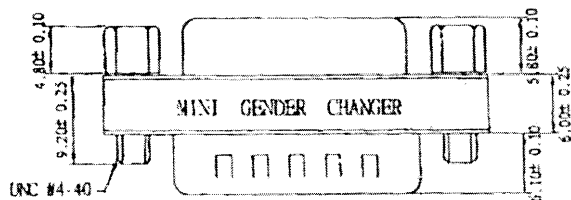

DGC 15 M/F GENDER CHANGER

PIN OUT: 15Male

15Female

1	-----	1
2	-----	2
14	-----	14
15	-----	15
G	-----	G

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 VO

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one minute

INSULATOR RESISTANCE: 1000MΩ min at 500V DC

TEMPERATURE: -55°C — +105°C

UNIT: m/m

REVISED DETAILS		DATE	REVISED BY	Part number:	Revision:	SALES :
REV.	DESCRIPTION			B044	ORIG.	
				HPQ number:	Drawing # B044	
					Scale: None	
					Date:	

3252152 + 467637
 ↓ 2164
 ↓ 2176