
## Pomona®

## Model 2443K Patch Cord, Double Banana Plug To Miniature Double Banana Plug

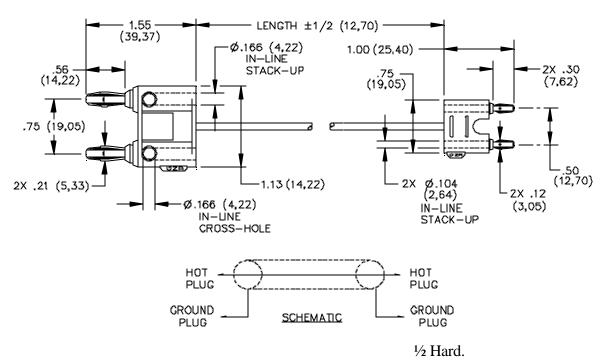

## **MATERIALS:**

Connector: 1<sup>st</sup> End - Double Banana Plug

Spring: Beryllium Copper per QQ-C-533, Alloy

C172, Cond. HT.

Plug Body: Brass per QQ-B-626, Alloy 360, 1/2

hard.

Finish: Nickel plated per QQ-N-290 Class 2, 200/300

microinches.

Insulation: Polypropylene, molded to banana plug bodies and cable. Color matches color of cable.

Marking: "POMONA ELECTRONICS, CALIF."

Cable Type: RG174/U, .100" O.D.

Cap. Pf./ft.: 30.8

Nominal Impedance: 50 Ohms

Connector: 2<sup>nd</sup> End – Miniature Double Banana Plug

Spring - Beryllium Copper per QQ-C-533,

Berylco 25, Cond. H.T.

Plug Body – Brass per QQ-B-626, Alloy 360,

Finish: Gold plated per MIL-G-45204, Type II, Class 00 over electroless nickel per MIL-C-26074,

Class 1, 200/300 microinches.

Insulation: Same as double banana plug.

Marking: "POMONA ELECTRONICS CALIF."

**RATINGS:** 

Operating Temperature: +55°C. (+131°F.) Max.

Operating Voltage: 1000 VRMS

**ORDERING INFORMATION:** Model 2443-K-

XX

XX = Length in inches. Std. Lengths: 24" (60,96 cm), 36" (91,44 cm), 48" (121,92 cm) & 60" (152,40 cm).

Additional lengths can be quoted upon request.

Ordering Example: 2443-K-36, Cable length will be

36" (9,44 mm) long.

All dimensions are in inches. Tolerances (except noted):  $.xx = \pm .02$ " (,51 mm),  $.xxx = \pm .005$ " (,127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies. Made in USA

6/9/99 Sales: 800-490-2361 Fax: 888-403-3360
SY/EH/LS Technical Assistance: 800-241-2060
S:\Engineering\Release\DataSheet\FlukeDataSheet\d2443\_1\_01.doc