



CA139, CA239, CA339 LM339, LM2901, LM3302

Quad Voltage Comparators for Industrial,
Commercial and Military Applications

September 1993

Features

- Operation from Single or Dual Supplies
- Common Mode Input Voltage Range to GND
- Output Voltage Compatible with TTL, DTL, ECL, MOS and CMOS
- Differential Input Voltage Range Equal to the Supply Voltage
- Maximum Input Offset Voltage (V_{IO})
 - CA139A, CA239A, CA339A 2mV
 - CA139, CA239, CA339 5mV
 - LM2901 7mV
 - LM3302 20mV
- Replacement for Industry Types 139, 239, 339, 139A, 239A, 339A, 2901, 3302

Applications

- Square Wave Generator
- Time Delay Generators
- Pulse Generators
- Multivibrators
- High Voltage Digital Logic Gates
- A/D Converters
- MOS Clock Timers

Description

The devices in this series consist of four independent single or dual supply voltage comparators on a single monolithic substrate. The common mode input voltage range includes ground even when operated from a single supply, and the low power supply current drain makes these comparators suitable for battery operation. These types were designed to directly interface with TTL and CMOS.


Types CA139A, CA239A, and CA339A have all the features and characteristics of their prototype counterparts CA139, CA239, and CA339 plus an even lower input offset voltage characteristic. All the SOIC parts are available on tape and reel. Replace the M suffix in the part number with M96 when ordering (e.g. CA0339AM96). The CA339 is also available in chip form (H suffix).

Ordering Information


PART NUMBER	TEMPERATURE RANGE	PACKAGE
CA0139E, AE	-55°C to +125°C	14 Lead Plastic DIP
CA0139F, AF	-55°C to +125°C	14 Lead Ceramic DIP
CA0139M, AM	-55°C to +125°C	14 Lead SOIC
CA0239E, AE	-25°C to +85°C	14 Lead Plastic DIP
CA0239F, AF	-25°C to +85°C	14 Lead Ceramic DIP
CA0239M, AM	-25°C to +85°C	14 Lead SOIC
CA0339E, AE	0°C to +70°C	14 Lead Plastic DIP
CA0339F, AF	0°C to +70°C	14 Lead Ceramic DIP
CA0339M, AM	0°C to +70°C	14 Lead SOIC
LM339N, AN	0°C to +70°C	14 Lead Plastic DIP
LM2901M	-40°C to +85°C	14 Lead SOIC
LM2901N	-40°C to +85°C	14 Lead Plastic DIP
LM3302M	-40°C to +85°C	14 Lead SOIC
LM3302N	-40°C to +85°C	14 Lead Plastic DIP

Pinout

CA139, CA139A, CA239, CA239A, CA339 (PDIP, CDIP, SOIC)
CA339A, LM2901, LM3302 (PDIP, SOIC)
LM339, LM339A (PDIP)
TOP VIEW

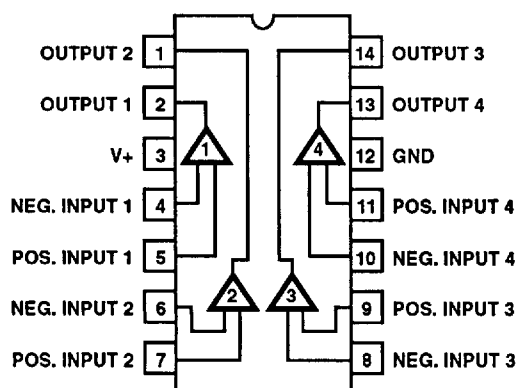

Schematic Diagram

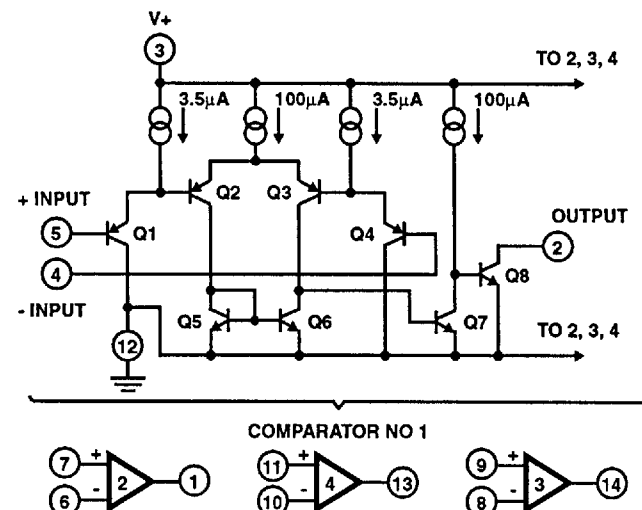

Specifications CA139, CA139A, CA239, CA239A, CA339, CA339A, LM339, LM339A, LM2901, LM3302**Absolute Maximum Ratings**

Supply Voltage 36V or ± 18 V
 Differential Input Voltage 36V
 Input Voltage -0.3V to +36V
 Input Current ($V_I < -0.3$ V) Note 4 50mA
 Output Short Circuit Duration (Single Supply) Note 5 .. Continuous
 Junction Temperature +175°C
 Junction Temperature (Plastic Package) +150°C
 Lead Temperature (Soldering 10 Sec.) +300°C

Operating Conditions

Operating Temperature Range -55°C to +125°C
 Storage Temperature Range -65°C to +150°C
 Thermal Package Characteristics (°C/W) .. θ_{JA} θ_{JC}
 Ceramic DIP Package 71 14
 Plastic DIP Package 107 38
 SOIC Package 119 36

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

Electrical Specifications $V_+ = 5$ V, Unless Otherwise Specified

PARAMETER	SYMBOL	CONDITION		LIMITS						UNITS
				CA139			CA139A			
				MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V _{IO}	V _{REF} = 1.4V, R _S = 0, Output Switch Point V ≅ 1.4V	T _A = +25°C	-	2	5	-	1	2	mV
			Note 1	-	-	9	-	-	4	mV
Differential Input Voltage	V _{ID}	Keep All Inputs ≥ 0V for V ₋ (if used), Notes 1, 2		-	-	36	-	-	36	V
Saturation Voltage	V _{SAT}	V _{I-} = 1V, V _{I+} = 0V, I _{SINK} ≤ 4mA	T _A = +25°C	-	250	400	-	250	400	mV
			Note 1	-	-	700	-	-	700	mV
Common Mode Input Voltage Range	V _{ICR}	Note 3	T _A = +25°C	0	-	V ₊ - 1.5	0	-	V ₊ - 1.5	V
			Note 1	0	-	V ₊ - 2	0	-	V ₊ - 2	V
Input Offset Current	I _{IO}	I _{I+} - I _{I-}	T _A = +25°C	-	3	25	-	3	25	nA
			Note 1	-	-	100	-	-	100	nA
Input Bias Current	I _{IB}	I _{I+} or I _{I-} with Output in Linear Range	T _A = +25°C	-	25	100	-	25	100	nA
			Note 1	-	-	300	-	-	300	nA
Total Supply Current	I ₊	R _L = ∞ on All Comparators, T _A = +25°C		-	0.8	2	-	0.8	2	mA
Output Leakage Current		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 5V	T _A = +25°C	-	0.1	-	-	0.1	-	nA
		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 30V	Note 1	-	-	1	-	-	1	μA
Output Sink Current		V _{I-} ≥ 1V, V _{I+} = 0V, V _O ≤ 1.5V, T _A = +25°C		6	16	-	6	16	-	mA
Voltage Gain	A _{OL}	R _L ≥ 15kΩ, V ₊ = 15V, T _A = +25°C		-	200	-	50	200	-	V/mV
Large Signal Response Time		V _I = TTL Logic Swing, V _{REF} = 1.4V, V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	300	-	-	300	-	ns
Response Time (Figures 3 and 4)		V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	1.3	-	-	1.3	-	μs

Specifications CA139, CA139A, CA239, CA239A, CA339, CA339A, LM339, LM339A, LM2901, LM3302**Electrical Specifications** $V_+ = 5V$, Unless Otherwise Specified


PARAMETER	SYMBOL	CONDITION		LIMITS						UNITS
				CA239, CA339, LM339			CA239A, CA339A, LM339A			
				MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V _{IO}	V _{REF} = 1.4V, R _S = 0, Output Switch Point V ≡ 1.4V	T _A = +25°C	-	2	5	-	1	2	mV
			Note 1	-	-	9	-	-	4	mV
Differential Input Voltage	V _{ID}	Keep All Inputs ≥ 0V for V ₋ (if used), Notes 1, 2		-	-	36	-	-	36	V
Saturation Voltage	V _{SAT}	V _{I-} = 1V, V _{I+} = 0V, I _{SINK} ≤ 4mA	T _A = +25°C	-	250	400	-	250	400	mV
			Note 1	-	-	700	-	-	700	mV
Common Mode Input Voltage Range	V _{ICR}	Note 3	T _A = +25°C	0	-	V ₊ - 1.5	0	-	V ₊ - 1.5	V
			Note 1	0	-	V ₊ - 2	0	-	V ₊ - 2	V
Input Offset Current	I _{IO}	I _{I+} - I _{I-}	T _A = +25°C	-	5	50	-	5	50	nA
			Note 1	-	-	150	-	-	150	nA
Input Bias Current	I _{IB}	I _{I+} or I _{I-} with Output in Linear Range	T _A = +25°C	-	25	250	-	25	250	nA
			Note 1	-	-	400	-	-	400	nA
Total Supply Current	I ₊	R _L = ∞ on All Comparators, T _A = +25°C		-	0.8	2	-	0.8	2	mA
Output Leakage Current		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 5V	T _A = +25°C	-	0.1	-	-	0.1	-	nA
		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 30V	Note 1	-	-	1	-	-	1	μA
Output Sink Current		V _{I-} ≥ 1V, V _{I+} = 0V, V _O ≤ 1.5V, T _A = +25°C		6	16	-	6	16	-	mA
Voltage Gain	A _{OL}	R _L ≥ 15kΩ, V ₊ = 15V, T _A = +25°C		50	200	-	50	200	-	V/mV
Large Signal Response Time		V _I = TTL Logic Swing, V _{REF} = 1.4V, V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	300	-	-	300	-	ns
Response Time (Figures 3 and 4)		V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	1.3	-	-	1.3	-	μs

NOTES:

1. Ambient Temperature (T_A) applicable over operating temperature range as shown below.
CA139, CA139A = $-55^\circ C$ to $+125^\circ C$; CA239, CA239A = $-25^\circ C$ to $+85^\circ C$; CA339, CA339A, LM339, LM339A = $0^\circ C$ to $+70^\circ C$; LM2901, LM3302 = $-40^\circ C$ to $+85^\circ C$.
2. The comparator will provide a proper output state even if the positive swing of the inputs exceeds the power supply voltage level, if the other input remains within the common mode voltage range. The low input voltage state must not be less than $-0.3V$ (or $0.3V$ below the magnitude of the negative power supply, if used).
3. The upper end of the common mode voltage range is $(V_+) - 1.5V$, but either or both inputs can go to $+30V$ without damage.
4. Inputs must not go more negative than $-0.3V$.
5. Short circuits from the output to V_+ can cause excessive heating and eventual destruction. The maximum output current independent of V_+ is approximately $20mA$.

Specifications CA139, CA139A, CA239, CA239A, CA339, CA339A, LM339, LM339A, LM2901, LM3302**Electrical Specifications** $V_+ = 5V$, Unless Otherwise Specified

PARAMETER	SYMBOL	CONDITION		LIMITS						UNITS
				LM2901			LM3302			
				MIN	TYP	MAX	MIN	TYP	MAX	
Input Offset Voltage	V _{IO}	V _{REF} = 1.4V, R _S = 0, Output Switch Point V ≅ 1.4V	T _A = +25°C	-	2	7	-	1	20	mV
			Note 1	-	-	15	-	-	40	mV
Differential Input Voltage	V _{ID}	Keep All Inputs ≥ 0V for V ₋ (if used), Notes 1, 2		-	-	36	-	-	28	V
Saturation Voltage	V _{SAT}	V _{I-} = 1V, V _{I+} = 0V, I _{SINK} ≤ 4mA	T _A = +25°C	-	250	400	-	250	500	mV
			Note 1	-	-	700	-	-	700	mV
Common Mode Input Voltage Range	V _{ICR}	Note 3	T _A = +25°C	0	-	V ₊ - 1.5	0	-	V ₊ - 1.5	V
			Note 1	0	-	V ₊ - 2	0	-	V ₊ - 2	V
Input Offset Current	I _{IO}	I _{I+} - I _{I-}	T _A = +25°C	-	5	50	-	3	100	nA
			Note 1	-	-	200	-	-	300	nA
Input Bias Current	I _{IB}	I _{I+} or I _{I-} with Output in Linear Range	T _A = +25°C	-	25	250	-	25	500	nA
			Note 1	-	-	500	-	-	1000	nA
Total Supply Current	I ₊	R _L = ∞ on All Comparators, T _A = +25°C		-	0.8	2	-	0.8	2	mA
Output Leakage Current		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 5V	T _A = +25°C	-	0.1	-	-	0.1	-	nA
		V _{I+} ≥ 1V, V _{I-} = 0V, V _O = 30V	Note 1	-	-	1	-	-	1	μA
Output Sink Current		V _{I-} ≥ 1V, V _{I+} = 0V, V _O ≤ 1.5V, T _A = +25°C		6	16	-	6	16	-	mA
Voltage Gain	A _{OL}	R _L ≥ 15kΩ, V ₊ = 15V, T _A = +25°C		25	100	-	2	30	-	V/mV
Large Signal Response Time		V _I = TTL Logic Swing, V _{REF} = 1.4V, V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	300	-	-	300	-	ns
Response Time (Figures 3 and 4)		V _{RL} = 5V, R _L = 5.1kΩ, T _A = +25°C		-	1.3	-	-	1.3	-	μs

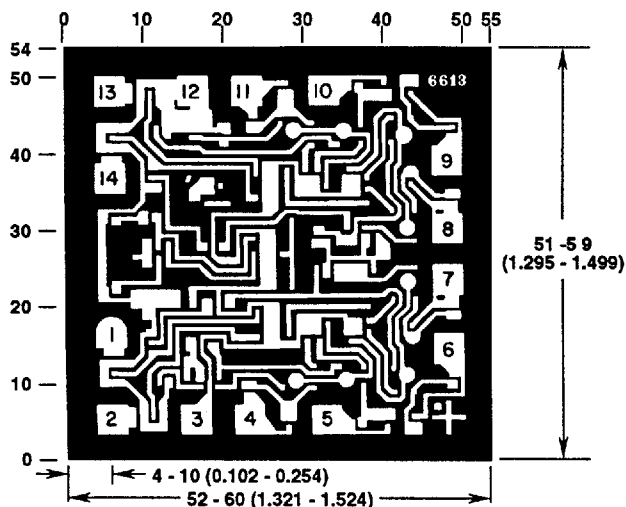Metallization Mask Layout

NOTE: Dimensions in parentheses are in mm and are derived from the basic in. dimensions as indicated. Grid graduations are in mils (10^{-3} inch).

CA139, CA139A, CA239, CA239A, CA339, CA339A, LM339, LM339A, LM2901, LM3302

Typical Performance Curves

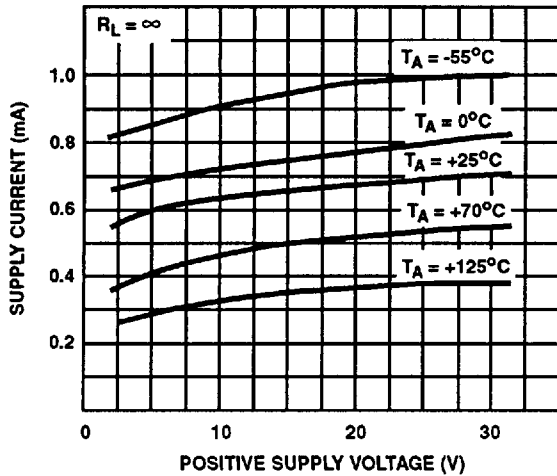


FIGURE 1. SUPPLY CURRENT vs SUPPLY VOLTAGE

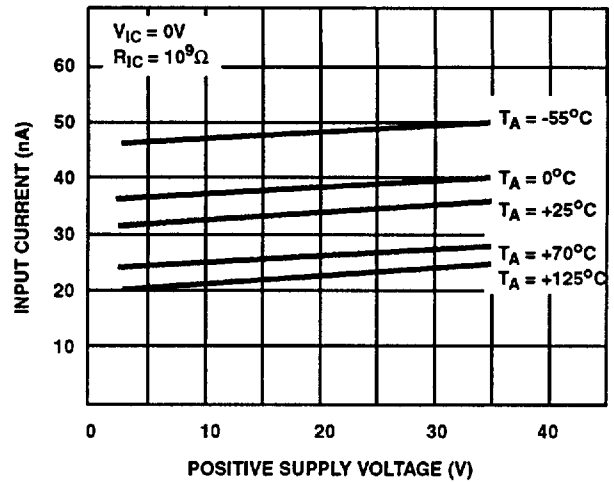


FIGURE 2. INPUT CURRENT vs SUPPLY VOLTAGE

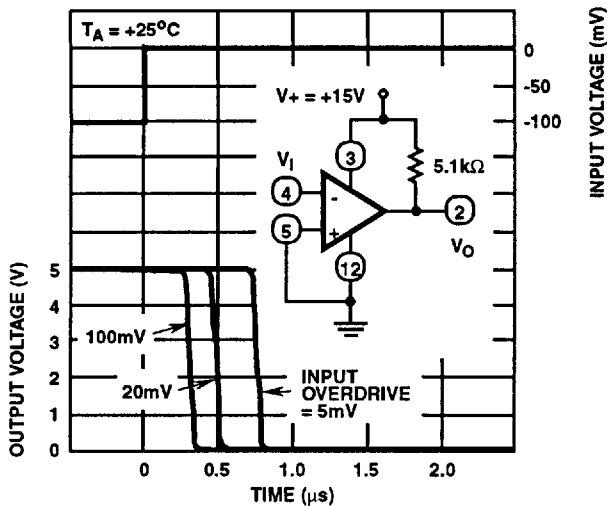
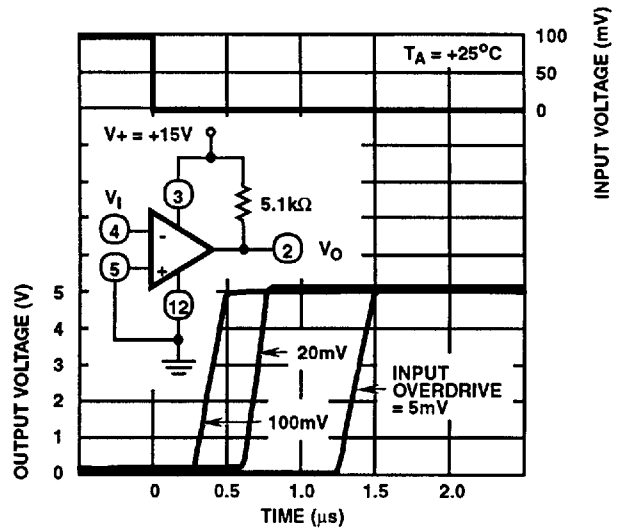
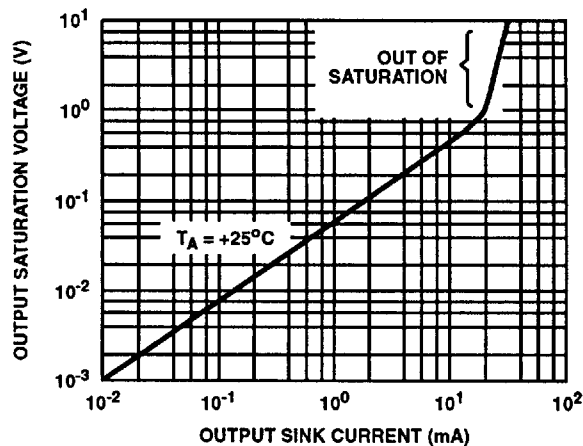
FIGURE 3. RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES
- NEGATIVE TRANSITIONFIGURE 4. RESPONSE TIME FOR VARIOUS INPUT OVERDRIVES
- POSITIVE TRANSITION

FIGURE 7. OUTPUT SATURATION VOLTAGE vs OUTPUT SINK CURRENT