
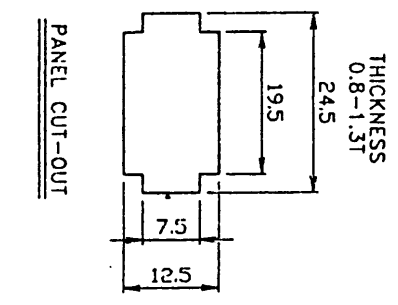
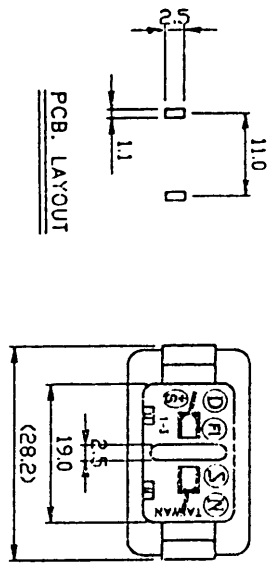

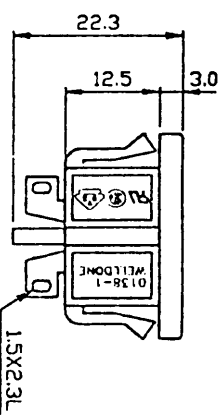


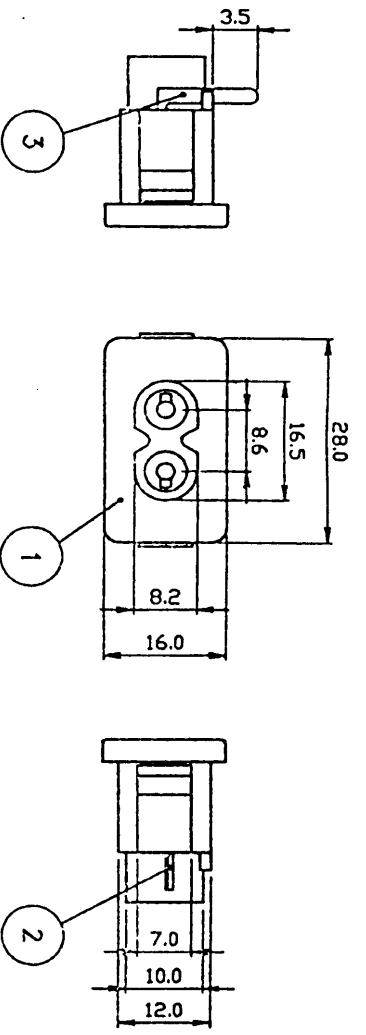

A: MATERIAL:

- 1. HOUSING: THERMOPLASTIC
- 2. TERMINAL: COPPER ALLOY

B: CHARACTERISTICS:

- 1. RATING: 2.5A 250V AC
- 2. INSULATION RESISTANCE: OVER 100MΩ 500V DC
- 3. DIELECTRIC STRENGTH: 2000V AC ONE MINUTE

C: APPROVALS:

UL, CSA, VDE, SEV, SEMKO, DEMKO, NEMKO & SETI

D: ORDERING OPTION GUIDE:

| ORDER#  | ITEM REQ. | TERMINAL DIFFERENCE  | CODE |
|---------|-----------|----------------------|------|
| 0138-1S | ① + ②     | 1.5X2.3L/SOLDER TABS | -S   |
| 0138-1P | ① + ③     | PCB. MOUNTING        | -P   |

E: SPECIFICATION:

| ③    | T-0138-1 | TERMINAL  | 1SET | PCB MOUNTING  | COPPER ALLOY  | TIN-PLATED |
|------|----------|-----------|------|---------------|---------------|------------|
| ②    | T-0138-1 | TERMINAL  | 1SET | 2.3X3.0T      | COPPER ALLOY  | TIN-PLATED |
| ①    | H-0138-1 | HOUSING   | 1    | SNAP-IN TYPE  | THERMOPLASTIC |            |
| ITEM | PART NO. | PART NAME | Q'TY | SPECIFICATION | MATERIAL      | REMARKS    |

724-920 = 0138-1S  
724-932 = 0138-1P

|    |                                 |           |                                      |
|----|---------------------------------|-----------|--------------------------------------|
| 名稱 | AC INLET 2P<br>SNAP-IN MOUNTING | 比例        | 1/1                                  |
| 材質 | PA66                            | 單位        | M/M                                  |
| 圖號 | 0138-1                          | 校對        |                                      |
| 編號 | LSA7                            | 設計        | K.D.W/U                              |
|    |                                 | 06-23 '95 | 0-6 ±0.1<br>6-30 ±0.2<br>90-120 ±0.3 |

0138-1S 0138-1P 0138-1S 0138-1P