

Fuseholder Open Design, Holder for FRT 250x, THT



250 VAC

**Description**

- Through hole mounting

Approvals

- UL File Number: E39328

References

General Product Information

Sicherungshalter zu FRT 250F; FRT 250T

Weblinks

Approvals, RoHS, CHINA-RoHS, e-Store, SCHURTER-Stock-Check, Distributor-Stock-Check


Technical Data

Fuse-Link	FRT Fuse
Mounting	PCB
Terminal	Solder THT
Rated Voltage	250VAC
Rated Current	6.3A
Degree of Protection	IP 30
Admissible Ambient Air Temp.	-40 °C to 85 °C
Climatic Category	40/085/21 acc. to IEC 60068-1
Material: Terminals	Tin-Plated Copper Alloy
Unit Weight (Socket/Cap)	0.4 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A

Dimensions

Length | 12 mm

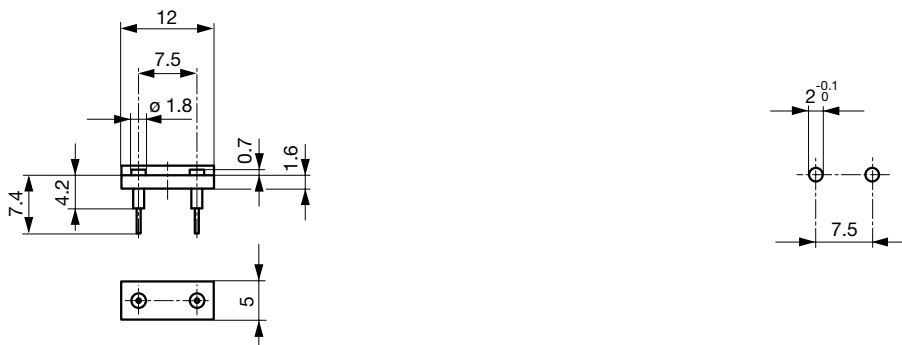

Drilling Diagram

Variants

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Holder	Order Number
●	7149.9019.03

Packaging Unit

Plastic Bag (100 pcs.)