

3 Electrical Characteristics

3.1 Absolute Maximum Ratings Over Operating Free-Air Temperature Range (unless otherwise noted)[†]

Supply voltage, V_{DD} (see Note 1)	7 V
Input voltage range, V_I	–0.5 V to $V_{DD} + 0.5$ V
Analog output short-circuit duration to any power supply or common	unlimited
Operating free-air temperature range, T_A	0°C to 70°C
Storage temperature range, T_{stg}	–65°C to 150°C
Junction temperature, T_J	175°C
Case temperature for 10 seconds: PPA package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds	260°C

[†] Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to GND.

3.2 Recommended Operating Conditions

	MIN	NOM	MAX	UNIT
Supply voltages, AV_{DD} , DV_{DD}	3.1	3.3	3.5	V
Reference voltage, V_{ref}	1.15	1.235	1.26	V
High-level input voltage, V_{IH}	2.4		$V_{DD}+0.5$	V
Low-level input voltage, V_{IL}			0.8	V
Output load resistance, R_L		37.5		Ω
FS ADJUST resistor, R_{SET}		523		Ω
Operating free-air temperature, T_A	0		70	°C

3.3 Electrical Characteristics

PARAMETER			TEST CONDITIONS	MIN	TYP†	MAX	UNIT
V _{OH}	High-level output voltage		I _{OH} = −800 μA	2.4			V
V _{OL}	Low-level output voltage	D(7–0), RCLKA, RCLKB, PCLK, MCLK, WINDOW, AMUXCTL	I _{OL} = 3.2 mA			0.4	V
		HSYNCOUT, VSYNCOUT	I _{OL} = 15 mA			0.4	
I _{IH}	High-level input current	TTL inputs	V _I = 2 V			1	μA
I _{IL}	Low-level input current	TTL inputs	V _I = 0.8 V			−1	μA
I _{DD}	Supply current	TVP3033-175				800	mA
		TVP3033-220				950	
		TVP3033-250				1100	
I _{OZ}	High-impedance-state output current					10	μA
C _i	Input capacitance	TTL inputs	f = 1 MHz, V _I = 2 V		4		pF

† All typical values are at V_{DD} = 3.3 V, T_A = 25°C.

3.4 Operating Characteristics

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
Resolution (each DAC)		8-bit mode		8		bits
		6-bit mode		6		
E _L End-point linearity error (each DAC)		8-bit mode			1	LSB
		6-bit mode			1/4	
E _D Differential linearity error (each DAC)		8-bit mode			1	LSB
		6-bit mode			1/4	
Gray scale error					5%	
Output current (see Note 2)		White level relative to blank	17.69	19.05	20.4	mA
		White level relative to black (7.5 IRE only)	16.74	17.62	18.5	mA
		Black level relative to blank (7.5 IRE only)	0.95	1.44	1.9	mA
		Blank level on IOR, IOB	0	5	50	μA
		Blank level on IOG (with SYNC enabled)	6.29	7.6	8.96	mA
		Sync level on IOG (with SYNC enabled)	0	5	50	μA
		One LSB (8/6 high)		69.1		μA
		One LSB (8/6 low)		276.4		μA
DAC-to-DAC matching				2%	5%	
DAC-to-DAC crosstalk				−20		dB
Output compliance			−1		1.2	V
Voltage reference output voltage			1.15	1.235	1.26	V
Output impedance				50		kΩ
Output capacitance		f = 1 MHz, I _{OUT} = 0		13		pF
Sense voltage reference			300	350	400	mV
Clock and data feedthrough				−20		dB
Glitch area (see Note 3)				50		pV−s
Pipeline delay, pixel port				4 LCLK +27 DOT		periods
Pixel clock PLL, MCLK PLL, SYNC A PLL, SYNC B PLL	Lock time			5		ms
	Jitter			±200		ps

NOTES: 2. Test conditions for RS343-A video signals (unless otherwise specified): "Recommended Operating Conditions", using external voltage reference V_{ref} = 1.235 V, R_{SET} = 523 Ω. When using the internal voltage reference, R_{SET} may need to be adjusted in order to meet these limits.

3. Glitch area does not include clock and data feedthrough. The −3-dB test bandwidth is twice the clock rate.

3.5 Timing Requirements (see Note 4)

		TVP3033 -175		TVP3033 -220		TVP3033 -250		UNIT
		MIN	MAX	MIN	MAX	MIN	MAX	
DOTCLK frequency		175		220		250		MHz
Pixel clock PLL	Internal frequency	175		220		250		MHz
	PCLK frequency	110		110		110		MHz
MCLK PLL frequency		100		100		100		MHz
VCO frequency for pixel clock PLL, MCLK PLL, SYNC A PLL, and SYNC B PLL		110	220	110	220	110	250	MHz
CLK0 frequency for VGA mode		85		85		85		MHz
t _{cyc}	Clock cycle time	TTL		7.1		7.1		ns
t _{su1}	Setup time, RS(3–0) valid before $\overline{RD}$ or $\overline{WR}$ ↓	17		17		17		ns
t _{h1}	Hold time, RS(3–0) valid after $\overline{RD}$ or $\overline{WR}$ ↓	17		17		17		ns
t _{su2}	Setup time, D(7–0) valid before $\overline{WR}$ ↑	35		35		35		ns
t _{h2}	Hold time, D(7–0) valid after $\overline{WR}$ ↑	0		0		0		ns
t _{su3}	Setup time, VGA(7–0) and $\overline{HSYNC}$, $\overline{VSYNC}$, and $\overline{BLANK}$ valid before CLK0↑	4		4		4		ns
t _{h3}	Hold time, VGA(7–0) and $\overline{HSYNC}$, $\overline{VSYNC}$, and $\overline{BLANK}$ valid after CLK0↑	4		4		4		ns
t _{su4}	Setup time, P(127–0) and PSEL valid before LCLKA↑	5		5		5		ns
t _{h4}	Hold time, P(127–0) and PSEL valid after LCLKA↑	4		4		4		ns
t _{su5}	Setup time, $\overline{HSYNC}$, $\overline{VSYNC}$, and OVS valid before LCLKA↑	5		5		5		ns
t _{h5}	Hold time, $\overline{HSYNC}$, $\overline{VSYNC}$, and OVS valid after LCLKA↑	1		1		1		ns
t _{su6}	Setup time, $\overline{BLANK}$ valid before LCLKA↑	3		3		3		ns
t _{h6}	Hold time, $\overline{BLANK}$ valid after LCLKA↑	4		4		4		ns
t _{w1}	Pulse duration, $\overline{RD}$ or $\overline{WR}$ low	60		60		60		ns
t _{w2}	Pulse duration, $\overline{RD}$ or $\overline{WR}$ high	40		40		40		ns
t _{w3}	Pulse duration, clock high	TTL		3		2		ns
t _{w4}	Pulse duration, clock low	TTL		3		2		ns

NOTES: 4. TTL input signals are 0 to 3 V with less than 3 ns rise/fall time between the 10% and 90% levels unless otherwise specified. For input and output signals, timing reference points are at the 10% and 90% signal levels. Analog output loads are less than 10 pF. D7–D0 output loads are less than 50 pF. All other output loads are less than 50 pF unless otherwise specified.

3.6 Switching Characteristics

PARAMETER	TVP3033-175			TVP3033-220			TVP3033-250			UNIT
	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
RCLK frequency (see Note 5)			85			85			85	MHz
t_{en1} Enable time, $\overline{RD}$ low to D(7–0) valid			40			40			40	ns
t_{dis1} Disable time, $\overline{RD}$ high to D(7–0) disabled			17			17			17	ns
t_{v1} Valid time, D(7–0) valid after $\overline{RD}$ high	5			5			5			ns
t_{d1} Delay time, $\overline{RD}$ low to D(7–0) starting to turn on	5			5			5			ns
t_{d2} Delay time, CLK0 to DOTCLK (internal signal) high/low		7			7			7		ns
t_{d6} Analog output settling time (see Note 6)		5			5			4		ns
t_r Analog output rise time (see Note 7)		2			2			2		ns
Analog output skew	0		2	0		2	0		2	ns

- NOTES: 5. RCLKA and RCLKB can drive an output capacitive load up to 15 pF. The worst-case transition time between the 10% and 90% levels is less than 4 ns (typical 3 ns).
6. Measured from 50% point of full-scale transition to output settling, within ± 1 LSB (settling time does not include clock and data feedthrough).
7. Measured between 10% and 90% of full-scale transition.

3.7 Timing Diagrams

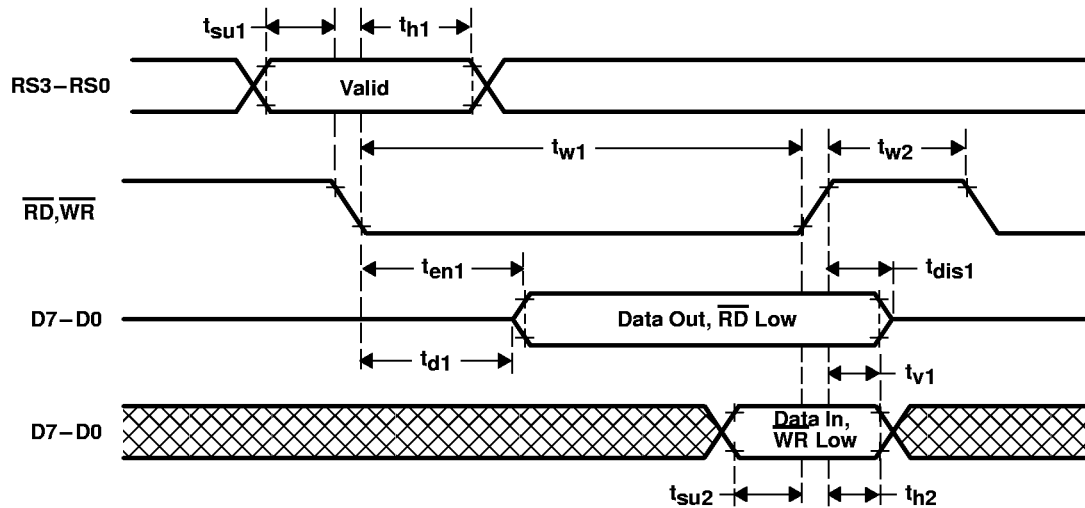


Figure 3–1. MPU Interface Timing

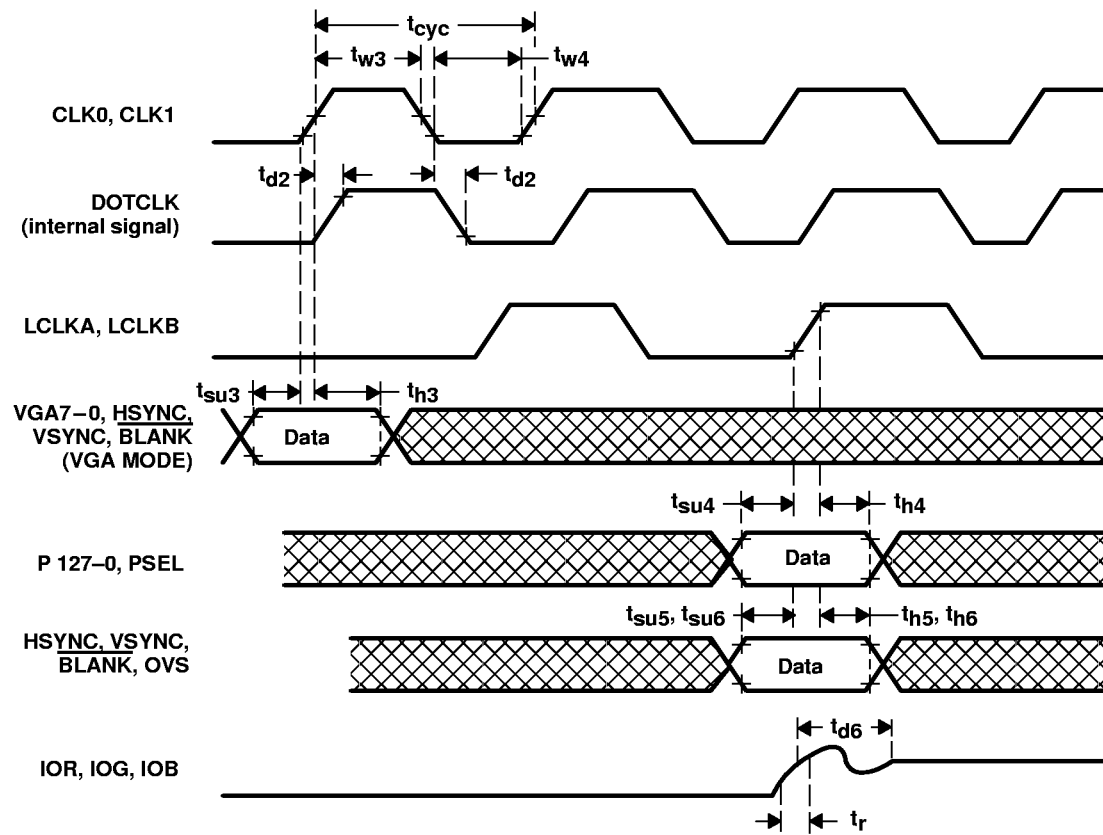


Figure 3-2. Video Input/Output Timing