


BRAND-REX LIMITED
4 CORE CABLE
Our Ref. BE 57302

Page 1 of 1

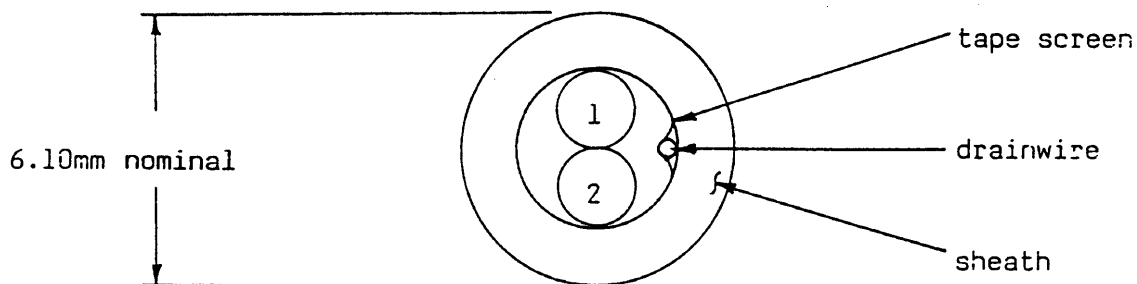

COMPONENT PRIMARY

CONDUCTOR: 22 AWG solid tinned copper.

INSULATION: Semi-rigid PVC. 0.33mm nominal radial thickness.

DIAMETER: 1.31mm nominal.

TWINNING: 2) of the above Primaries cabled together with a Left Hand lay.

CABLE ASSEMBLY: 2) of the above Components (Items 1-2) cabled together with a Left Hand lay.

TAPE SCREEN: Wrapped with aluminised polyester tape, 25% minimum overlap.
1) 22 AWG 7/30 AWG tinned copper drainwire is applied over tape screen and maintains continuous contact with aluminised side of screen.


SHEATH: CHROME GREY PVC. 0.89mm nominal radial thickness.

DIAMETER: 6.10mm nominal.

LISTING: UL STYLE 2464 80°C 300V

COLOUR CODE:	Item No.	Colour
	1	Black
		Red
	2	Black
		White

ELECTRICALS: Mutual Capacitance : 30 pF/ft nominal
Grounded Capacitance : 54 pF/ft nominal

Rev.	1	DF	8/88	Design updated	Drawn By	Date	Checked	Approved
	2	TS	3/89	Design updated	Tony Saunders	25.10.85	DF	DF
This drawing is confidential to and the property of Brand-Rex Limited, the drawing and any information therein shall not be reproduced, copied or used for any purpose whatsoever without the written permission of Brand-Rex Limited.					 BRAND-REX LIMITED DIVISION Viewfield Industrial Estate Glenrothes, Fife, Scotland KY6 2RS Telephone: Glenrothes (0592) 772124 Telex: 72252 Fax: 0592 775314			
					Drawing Number	1932		
Ref.					Scale	-	Revision	2