


Absolute Maximum Ratings¹

Parameter	Absolute Maximum
Input Power ²	1 W CW
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C


- Exceeding these limits may cause permanent damage.
- With internal load dissipation of 0.125 W maximum.

Recommended PCB Configuration

(Dimensions in Inches)



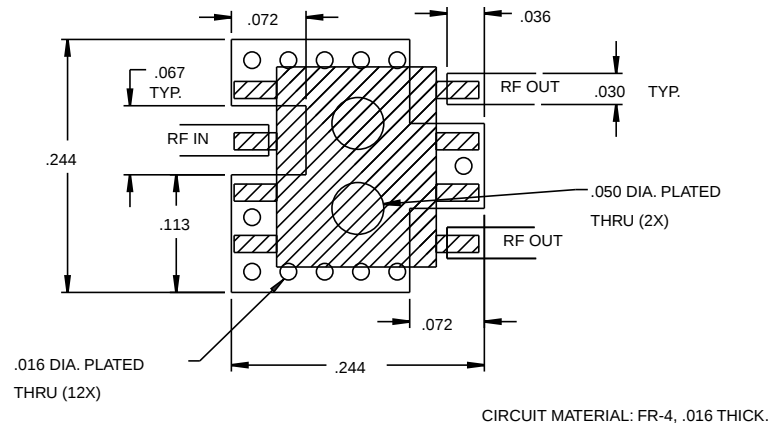


Functional Diagram³

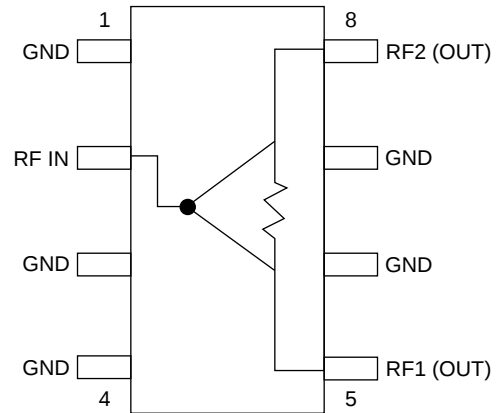

- Pins 1, 3, 4, 6, and 7 must be RF and DC grounded.

Typical Performance @ +25°C

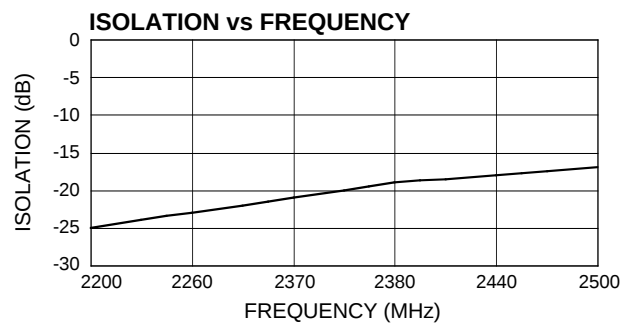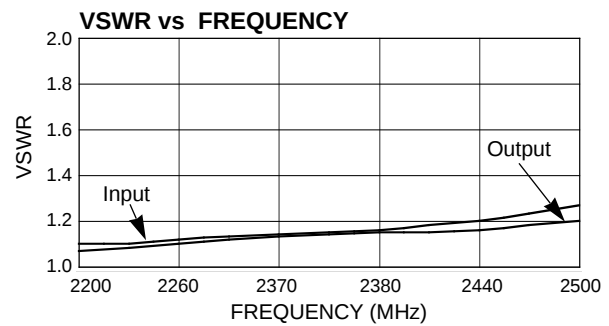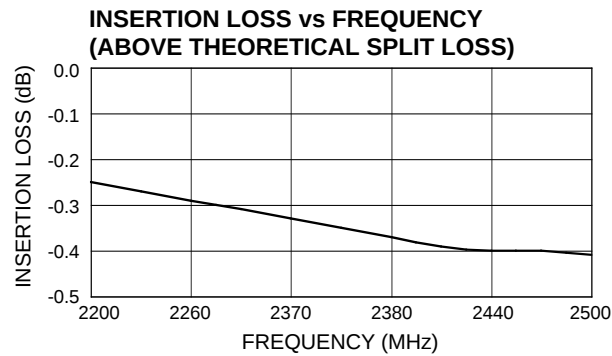

Specifications Subject to Change Without Notice.