


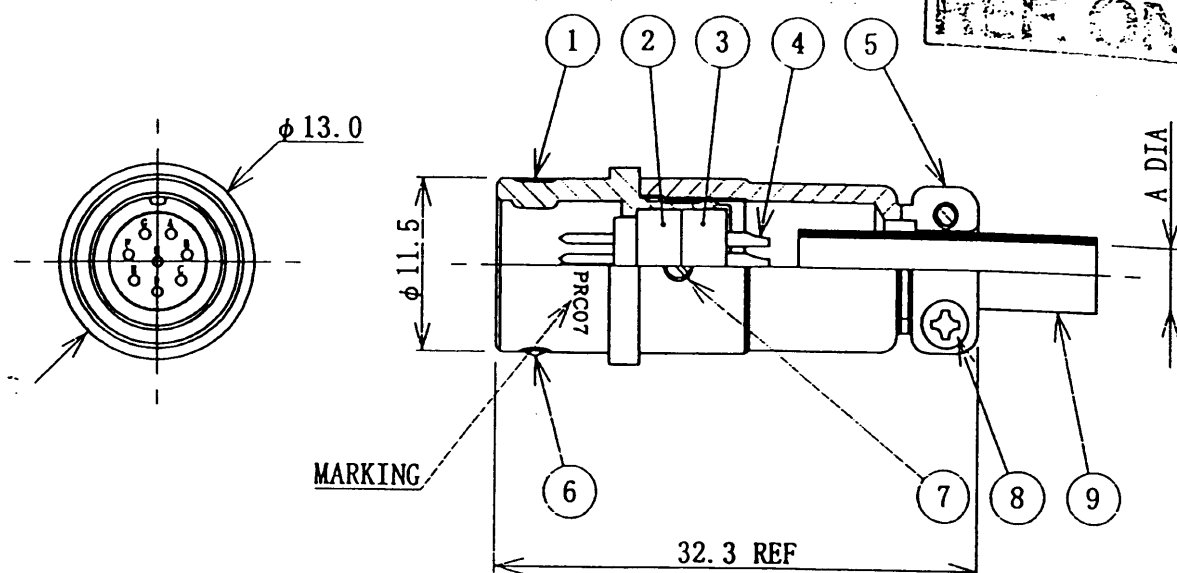

NOTES

1. CHARACTERISTICS

DIELECTRIC WITHSTANDING VOLTAGE : 300V rms AT SEA LEVEL.

INSULATION RESISTANCE : 1000M Ω MIN AT 100V D.C.CONTACT RESISTANCE : 10m Ω MAX D.C. 1A MAX

2. RATING

VOLTAGE RATING : 100V rms MAX AT SEA LEVEL

CURRENT RATING : 2A MAX


3. SOLDER BUCKET SIZE : 0.5 DIA

4. A DIA : $\phi 5.2$ ($\phi 4.0$)

*() SLEEVE AT FITTING

5. MARKING : PRC07 T.M.W PAT

NUMBER OF CONTACT
(VIEW ON TERMINATION
SIDE OF INSULATOR)



9	SLEEVE	VINYL CHLORIDE	—	1	
8	CROSS RECESSED HEAD SCREW	BRASS	NICKEL PLATED	2	
7	SLOTTED SET SCREW	STEEL	NICKEL PLATED	1	
6	STEEL BALL	STEEL	CHROMIUM PLATED	3	
5	REAR SHELL	BRASS	NICKEL PLATED	1	
4	PIN CONTACT	PHOSPHOR BRONZE	GOLD FLASH OVER NICKEL PLATED	8	
3	REAR INSULATOR	PBT RESIN	—	1	
2	FRONT INSULATOR	PBT RESIN	—	1	
1	INSERT SHELL	BRASS	NICKEL PLATED	1	
品番 ITEM	部 品 名 DESCRIPTION	材 質 MATERIAL	処 理 TREATMENT	数 量 QTY	備 考 REMARKS

記号 SYM	変 更 REVISION	第三角法 PROJECTION	尺 度 SCALE 2 / 1	T.M.W TAJIMI ELECTRONICS CO., LTD.		
			単位 UNITS mm	製図 DRAWN S. SATO	DATE 11 JAN 1999	PRC07-J8M PRC07-1006 1
		交差 TOLERANCES ON ANGLE . X . XX		設計 ENGR T. Waki	DATE 11 JAN 99	
		± ± ±		検図 CHK T. Waki	DATE 11 JAN 99	
		仕様書番号 SPEC No		承認 APPD K. Yagi	DATE 12 JAN 99	
		SHEET				