

Digital NTSC/PAL Encoder

BU1419K

The BU1419K is an LSI IC that converts digital YUV input into analog video signals in the NTSC or PAL format.

●Applications

Video CDs

●Features

- 1) Supported input clocks : 27.0/13.5MHz.
- 2) 16-bit input Y, U and V signals.
- 3) Supports both timing master and timing slave synchronization signals.
- 4) NTSC, PAL, Y and C signals are output through 3-channel, 9-bit high-speed DAC (with 75Ω driver).
- 5) Internal 8-color OSD function.
- 6) Single 5V power supply.

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{DD} , AV _{DD} , DV _{DD}	-0.5~7.0	V
Input voltage	V _{IN}	-0.5~V _{DD} +0.5	V
Storage temperature	T _{stg}	-55~150	°C
Power dissipation	P _d	1375*1	mW

*1 Reduced by 11 mW for each increase in Ta of 1°C over 25°C.

When mounted to a 70 × 70 × 1.6 mm glass epoxy board

※ Does not represent guaranteed performance

◎ Not designed for radiation resistance.


●Recommended operating conditions

Parameter	Symbol	Limits	Unit
Power supply voltage	V _{DD} =AV _{DD} =DV _{DD} *	4.75~5.25	V
Input voltage, high level	V _{IH}	2.1~V _{DD}	V
Input voltage, low level	V _{IL}	0~0.8	V
Analog input voltage	VA _{IN}	0~AV _{DD}	V
Operating temperature	T _{opr}	-25~60	°C

* Use at V_{DD} = AV_{DD} = DV_{DD}

7828999 0022065 T68

●Block diagram

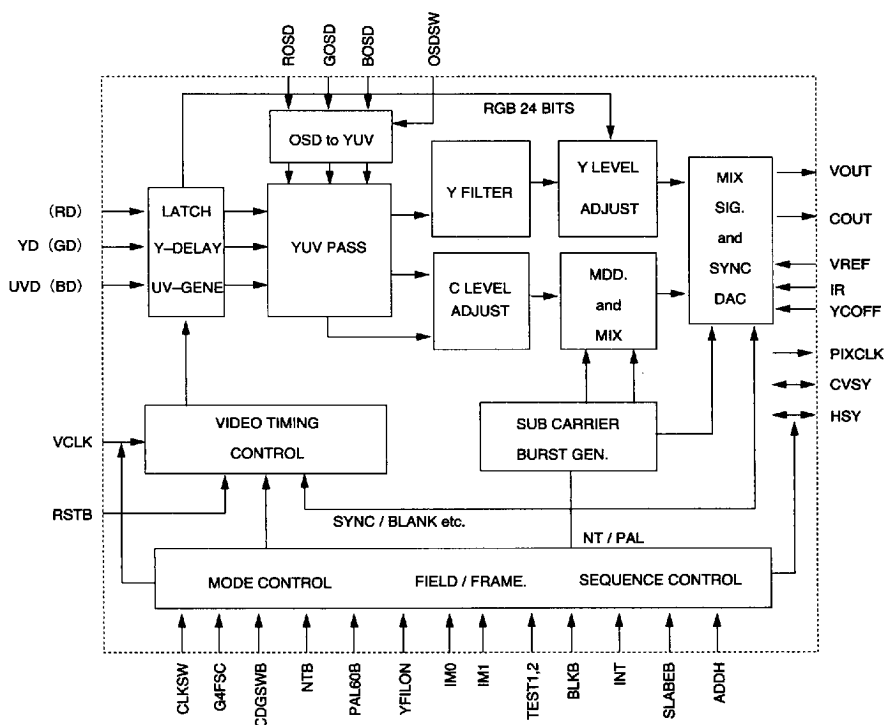

Digital NTSC/PAL encoders

Multimedia video

7828999 0022066 9T4

ROHM

257

● Pin descriptions

Pin No.	Pin name	Function	
1	BOSD	OSD BLUE DATA INPUT	*
2	YD0	Y DATA Bit0 (LSB)	*
3	YD1	Y DATA Bit1	*
4	YD2	Y DATA Bit2	*
5	YD3	Y DATA Bit3	*
6	YD4	Y DATA Bit4	
7	YD5	Y DATA Bit5	
8	YD6	Y DATA Bit6	
9	GND	DIGITAL GROUND	
10	YD7	Y DATA Bit7 (MSB)	
11	UVD0	UV DATA Bit0 (LSB)	*
12	UVD1	UV DATA Bit1	*
13	UVD2	UV DATA Bit2	*
14	UVD3	UV DATA Bit3	*
15	OSDSW	OSD INPUT ENABLE	*
16	CDGSWB	NORMALLY PULLUP TO VDD	
17	UVD4	UV DATA Bit4	
18	UVD5	UV DATA Bit5	
19	UVD6	UV DATA Bit6	
20	UVD7	UV DATA Bit7 (MSB)	
21	GND	DIGITAL GROUND	
22	NTB	SELECT NTSC/PAL MODE	
23	IM0	INPUT MODE SET Bit0	*
24	IM1	INPUT MODE SET Bit1	*
25	TEST1	NORMALLY PULLDOWN TO GND	*
26	TEST2	NORMALLY PULLDOWN TO GND	*
27	CVSY	C - SYNC OR V - SYNC INPUT	
28	HSY	H - SYNC INPUT	
29	PIXCLK	1/2 FREQ. OF INTERNAL CL	
30	BLKB	DATA BLANKING ENABLE	*
31	VDD	DIGITAL VDD	
32	INT	INTERLACE/NON - INTERLACE	



* . . . Internal pull-down resistor

◇ . . . Internal pull-up resistor

Pin No.	Pin name	Function	
33	SLABEB	SET MODE MASTER/SLABE	*
34	ADDH	ADD ONE_LINE AT NON - INTER.	*
35	VREF	REFERENCE VOLTAGE (1.29V)	
36	CGND	CHROMA OUTPUT GROUND	
37	COUT	CHROMA OUTPUT	
38	VGND	GROUND	
39	VOUT	NORMALLY PULLDOWN TO GND	
40	AVSS	ANALOG (DAC,VREF) GROUND	
41	NC	—	
42	IR	REFERENCE RESISTOR (1.2K)	
43	AVDD	ANALOG (DAC,REF) VDD	
44	YGND	LUMINANCE OUTPUT GROUND	
45	YOUT	LUMINANCE OUTPUT	
46	G4FSC	PULLDOWN TO GND	
47	GCLK	NORMALLY PULLDOWN TO GND	
48	YCOFF	DAC (YOUT,COUT) OFF	*
49	YFILON	PULLDOWN TO GND	*
50	PAL60B	PAL60 ON AT NTB=HIGH	◇
51	VCLK	VIDEO CLOCK INPUT FOR Video - CD	
52	RSTB	LOGIC PART INITIAL RESET	◇
53	CLKSW	DIVIDE INPUT CLK ENABLE	
54	RD0	NORMALLY PULLDOWN TO GND	*
55	RD1	NORMALLY PULLDOWN TO GND	*
56	RD2	NORMALLY PULLDOWN TO GND	*
57	ROSD	OSD RED DATA INPUT	*
58	RD3	NORMALLY PULLDOWN TO GND	*
59	RD4	NORMALLY PULLDOWN TO GND	*
60	RD5	NORMALLY PULLDOWN TO GND	*
61	VDD	DIGITAL VDD	
62	RD6	NORMALLY PULLDOWN TO GND	*
63	RD7	NORMALLY PULLDOWN TO GND	*
64	GOSD	OSD GREEN DATA INPUT	*

■ 7828999 0022067 830 ■

●Input/output circuits

Pin No.	Pin name	In/output	Equivalent circuit	Pin description
2~8 10	YD[0 : 7]	Input		Y signal input during 16-bit YUV input.
11~14 17~20	UVD[0 : 7]	Input		U and V signal input during 16-bit YUV input.
54~56 58~60 62,63	RD[0 : 7]	Input		Normally connected to GND.
1 57 64 15	ROSD GOSD BOSD OSDSW	Input		For OSD data input when using the OSD function. When OSDSW is HIGH, inputs from ROSD, GOSD and BOSD have priority having priority over YUV.
16	CDGSWB	Input		Normally connected to V _{DD} .
22	NTB	Input		For switching between the NTSC mode (L level) and PAL mode (H level)
23 24	IM0 IM1	Input		Control pin for setting the input mode to YUV or DAC through.
28	HSY	Input and output		The horizontal synchronization pin. Inputs (when SLABEB is at the low level) or outputs (SLABEB when is at the high level) the negative HSYNC signal. Also used for the synchronizing signal for halving the clock frequency from VCLK (when CLKSW = L).

Digital NTSC/PAL encoders





Multimedia video

7828999 0022068 777




Pin No.	Pin name	In/output	Equivalent circuit	Pin description
27	CVSY	Input		Inputs the composite synchronization signal (CSYNC) or vertical synchronization signal (VSYNC) (when SLABEB is at the low level), or outputs the vertical synchronization signal (VSYNC) (when SLABEB is at the high level).
30	BLKB	Input		Setting this pin to the high level enables data output beginning with the line immediately following the one where equivalent pulse output ended (normally kept at the low level).
29	PIXCLK	Output		Output after the internal clock signal is halved. Data are received at the edge transformation point of this clock signal.
32	INT	Input		Used to switch between interlacing (H level) and non-interlacing (L level).
33	SLABEB	Input		Used to switch between the master mode (H level) and slave mode (L level).
34	ADDH	Input		Enabled in the non-interlace mode; used to switch between -0.5 lines (low level) and +0.5 lines (high level) as the number of lines in each interlacing field.

7828999 0022069 603

Pin No.	Pin name	In/output	Equivalent circuit	Pin description
35	VREF	Input		The reference voltage that determines the DAC output amplitude (1 LSB output current). Impress 1.29 V for normal 1 V _{P-P} output .
37	COUT	Output		S pin chroma output CGND is the reference ground.
39	VOUT	Output		Normally connected to GND.
45	YOUT	Output		S pin luminance output YGND is the reference ground.
42	IR	Input		Used to connect the reference resistor that determines DAC output amplitude (1 LSB output current). The current in this pin controls the per-bit current.
48	YCOFF	Input		Input of the low power mode switching signal. AT HIGH, the outputs of YOUT and COUT are turned off.
47	GCLK	Input		Normally connected to GND.
51	VCLK	Input		For input of the reference clock signal.

Digital NTSC/PAL encoders

Multimedia video

Pin No.	Pin name	In/output	Equivalent circuit	Pin description
52	RSTB	Input		For input of the reset signal that initializes the system
53	CLKSW	Input		Used to set the internal clock signal to one-half of VCLK input (low level) or equal to VCLK input (high level).
49 46	YFILON G4FSC	Input		Connect to GND.
50	PAL60B	Input		Used to switch between the PAL mode and PAL60 mode. Enabled when the NTB pin is at the high level.
25 26	TEST1 TEST2	Input		Should normally connect to GND.
31,61 43	VDD AVDD	—	—	Power supply pin for the digital and analog blocks.
9,21 36 38 40 44	GND CGND VGND AVSS YGND	—	—	Ground pin for the digital and analog blocks, composite output, luminance output and chroma output.

● Electrical characteristics (Unless otherwise noted, $T_a=25^{\circ}\text{C}$, $V_{DD}=AV_{DD}=DV_{DD}=5.0\text{V}$)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Clock frequency 1	fCLK1	—	27.0	—	MHz	Video - CD mode
Burst frequency 1	fBST1	—	3.5795	—	MHz	Subcarrier frequency (NTSC)
Burst frequency 2	fBST2	—	4.4336	—	MHz	Subcarrier frequency (PAL)
Burst cycle	CBST	—	9	—	CYC	
Operating circuit current	IDD	—	130.0	—	mA	* TBD
Output voltage, high level	VOH	4.0	4.5	—	V	IOH=−2.0mA
Output voltage, low level	VOL	—	0.5	1.0	V	IOH=2.0mA
Input voltage, high level	VIH	2.1	—	—	V	
Input voltage, low level	VIL	—	—	0.8	V	
Input current, high level	I _{IH}	−10.0	0.0	10.0	μA	
Input current, low level	I _{IL}	−10.0	0.0	10.0	μA	
DAC resolution	RES	—	9	—	BITS	
Linearity error	EL	—	±3.0	—	LSB	
Y white level current	IYW	—	25.14	—	mA	VREF=1.29V, RIR=1.2kΩ
Y black level current	IYB	—	7.24	—	mA	VREF=1.29V, RIR=1.2kΩ
Y zero level current	IYZ	−10.0	0.0	10.0	μA	

● Circuit operations

(1) General

The BU1419K converts 8-bit digital image data and video data to 9-bit luminosity signals (YOUT) and color signals (COUT) in the NTSC, PAL or PAL60 formats, and output.

Digital image and video data are adaptable for decoded video CD output. The output television signal can be switched to NTSC, PAL, PAL60, interlace or non-interlace. The clock signals input from VCLK can be used as the source clock for the internal clock. Input signals are received and processed in synchronization with the rise of the internal clock (BCLK, the base clock).

Input data is input from pins YD0 through YD7 and UVD0 through UVD7 in the YUV(4 : 2 : 2) format. Input format is selected with IM0 and IM1.

Enabling OSDSW validates input data from ROSD, GOSD and OSD, allowing for the input of 7-color (8 including black) data. As a clock frequency equal to 1/2 of the internal clock frequency is simultaneously output from PIXCLK, an OSD IC can be synchronized with

the BU1419K by connecting its clock input pin to PIXCLK.

The scanned data is adjusted to the 1001RE level at NTSC, PAL, and PAL60, after which U and V data are phase-modulated by an internally ordered subcarrier (3.58MHz in the NTSC mode and 4.43MHz in the PAL or PAL60 mode), generating modulated color signals. Finally, the needed synchronization levels, color blank level and burst signals, etc., are mixed, and NTSC and PAL luminance signals, and color signals are output through the 9-bit DAC.

Luminance signal (Y) : YOUT

Color signal (C) : COUT

When the video input pin (75 Ω termination) is connected, the luminance component of DAC output has a roughly 1.0 Vpp output range at the white level. For details concerning DAC output voltage levels, refer to Section 5, "DAC output level adjustment."

As the YOUT and COUT DAC output pins can be turned off by setting YCOFF to HIGH, the BU1419K allows for a low power mode.

Table 1. VCOFF pin low power consumption

Pin No.	Pin	Output mode and power consumption (*1)		
48	YCOFF	YOUT	COUT	Power consumption (Typ.)
	LOW	Luminance signal	Chroma signal	0.65W
	HIGH	No output (0V)	No output (0V)	0.35W

*1 AVDD=5.0V

(2) Mode setting

1) Output mode

Digital image and video data can be adapted for the Video-CD modes, which are selected according to the CDGSWB input voltage. The CD-G mode is selected when CDGSWB input is at the low level, the video CD mode when CDGSWB input is at the high level. Avail-

able output television modes are NTSC, PAL and PAL60, which are selected according to the inputs of NTB and PAL60 : The mode settings are given in the table below.

Table 2-1-1 : Mode setting

NTB	PAL60	TV mode
0	*	NTSC
1	0	PAL60
1	1	PAL

7828999 0022072 1T8

ROHM

Also, output is switched between interlaced output and non-interlaced output according to the input of INT : Non-interlaced output is selected when INT is at the low level, interlaced output when INT is at the high level. During non-interlaced output, the per-field line

count can be controlled with ADDH : A per-field line count for interlaced output of -0.5 lines is selected when ADDH is at the low level, and a per-field line count for interlaced output of $+0.5$ lines when ADDH is at the high level.

Table 2-1-2 : Interlaced/non-interlaced mode setting

INT	ADDH	Scanning mode	Line count per field	
			NTSC / PAL60	PAL
0	0	Non-interlaced	262	312
0	1	Non-interlaced	263	313
1	*	Interlaced	262.5	312.5

In addition, BLKB is used to control data output that follows immediately after the end of the equivalent pulse : Data output immediately after the end of the equivalent pulse is prohibited when BLKB is at the low level, and enabled when BLKB is at the high level. Thus, this IC supports closed-caption and teletext broadcasting.

2) Input format

The input format for digital data is set with IM1 and IM0 as shown in the table below. In addition to YUV (4 : 2 : 2), input in digital RGB and analog RGB is also possible (in the RGB through mode).

Table 2-2-1 : Input format setting

IM1	IM0	Input format	Output signal
0	0	Not used with this IC.	—
0	1	YUV (4:2:2) video CD format	Television signal (9-bit resolution)
1	1	ROSD, GOSD and BOSD expanded in the RGB input.	RGB analog signal (9 bits)

See Table 2-2-2 below for pins and bit allocation in the through mode.

Table 2-2-2 : Bit allocation in the through mode

Output pin	BIT8	BIT7	BIT6	BIT5	BIT4	BIT3	BIT2	BIT1	BIT0
VOUT (39)	RD7	RD6	RD5	RD4	RD3	RD2	RD1	RD0	ROSD
YOUT (45)	GD7	GD6	GD5	GD4	GD3	GD2	GD1	GD0	GOSD
COUT (37)	BD7	BD6	BD5	BD4	BD3	BD2	BD1	BD0	BOSD

7828999 0022073 034

The BU1419K also has internal OSD switches and a color data generation function, simplifying combined use with an OSD IC that outputs blank and RGB signals. Because the BU1419K outputs a clock frequency equal to 1/2 of the internal processing frequency, an ODSW IC can be synchronized by connecting its clock

input to this output.
Inputs to ROSD, GOSD and BOSD are valid while ODSW is at the HIGH level. The relationship between OSD data and color data output is shown in Table 2-2-3 below.

Table 2-2-3 : OSD function : Input data/color output correlation

ODSW	ROSD	GOSD	BOSD	Output color signal
1	0	0	0	Block (blanking)
1	0	0	1	Blue
1	0	1	0	Green
1	0	1	1	Cyan
1	1	0	0	Red
1	1	0	1	Magenta
1	1	1	0	Yellow
1	1	1	1	White
0	*	*	*	Depends on input set with IM0 and IM1

3) Clock

Generally, the externally supplied clock frequency should be double the internal clock frequency (BCLK, base clock) (when CLKSW is at the low level). The phase relationship between the internal and external clock signals is like that shown in Fig. 2-3-1 below, with HYS input as the reference. In the master mode, in

which HSY is used for output, HSY output is timed as shown in Fig. 2-3-1 below. The BU1419K receives data (YD and UVD) at the rise of the internal clock (BCLK), and so data should be input as shown in the figure below.

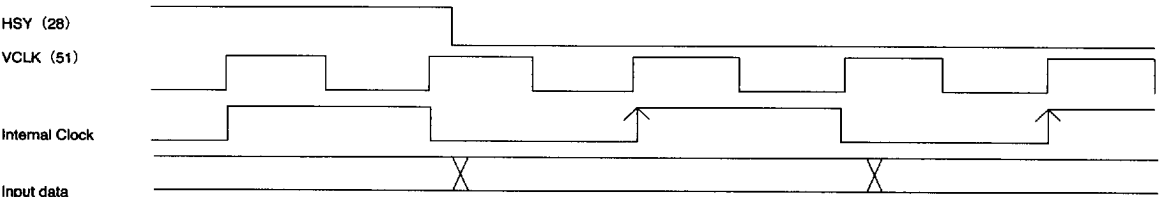


Fig. 2-3-1 Clock timing (CLKSW is at the low level)

Digital NTSC/PAL encoders

Multimedia video

An external clock frequency can be used as the internal clock frequency (BCLK) without modification by setting CLKSW to the high level. Data (YD and YUD)

are also received with the rise of BCLK, and so data should be input as shown in Fig. 2-3-2 below, which also shows the relationship with HSY.

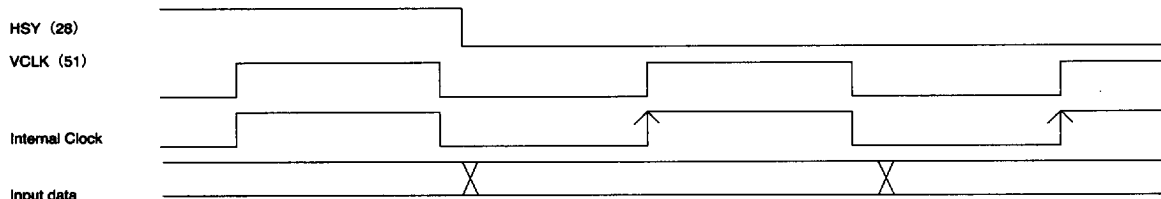


Fig. 2-3-2 Clock timing (CLKSW is at the high level)

The BU1419K generates a subcarrier (burst) frequency according to the input clock frequency. This limits the frequency used in each mode, and so data should be input at the frequencies shown below (Table 2-3-2).

Table 2-3-2 : Clock input frequencies (BU1419K)

CLKSW	Video CD mode
Pin	NTSC/PAL/PAL60 (common)
0	27.000MHz
1	13.500MHz

4) Synchronization signals

The BU1419K has two synchronization signal modes : the master mode, in which the synchronization signal is output, and the slave mode, in which the IC is synchronized to a synchronization signal input externally. The mode is selected with SLABEB : The slave mode is selected when SLABEB is at the low level, the master mode when SLABEB is at the high level.

In the master mode, signals are output from HSY and CVSY : the horizontal synchronization signal (HSYNC) from HSY and the vertical synchronization signal (VSYNC) from CVSY. In this mode, synchronization signal output is timed to the rise of RSTB, generating output according to the selected format (NTSC, PAL, PAL60, interlaced or non-interlaced).

In the slave mode, signals are input to HSY and CVSY : the horizontal synchronization signal (HSYNC) to HSY and the vertical synchronization signal VSYNC or a composite synchronization signal to CVSY. The IC automatically determines whether the input synchronization signal is VSYNC or CSYNC. Select the right input synchronization signal for the mode that has been set. After termination of RSTB, input odd and even numbers alternately. When input in a random odd and even sequence, output is blanked, after which normal data are output beginning with the next odd condition. The BU1419K is designed to handle only negative synchronization signals (i.e., those that result in the low level during the sink).

(3) Output level

Figures 1 through 6 below show pin output voltage level and the digital values of DAC output.

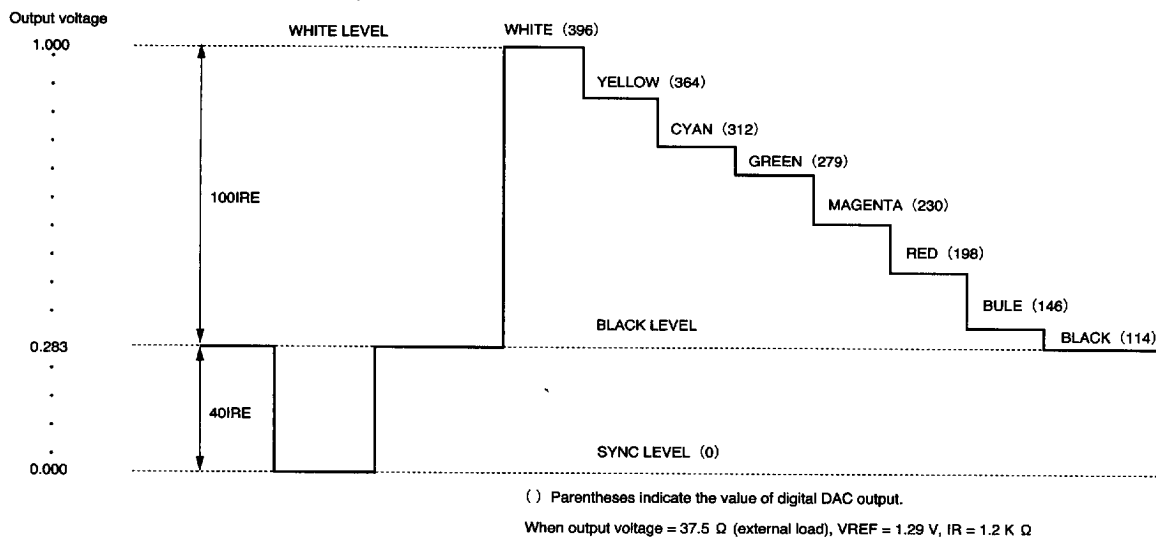


Fig. 1 NTSC Y (luminosity) signal output level


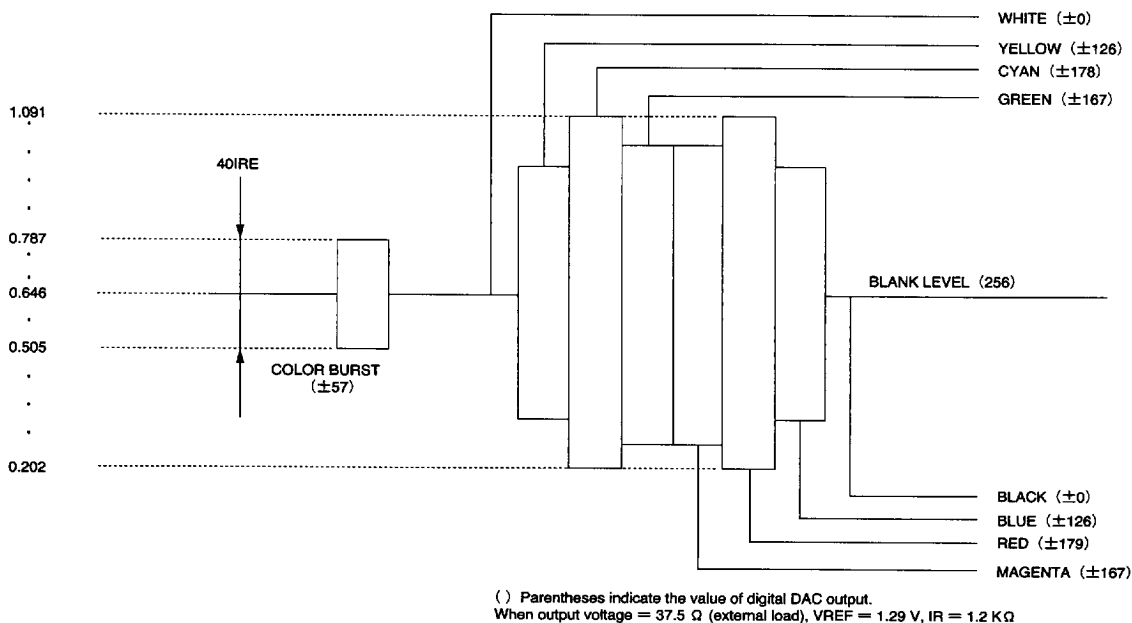


Fig. 2 NTSC C (chroma) signal output level

7828999 0022076 843

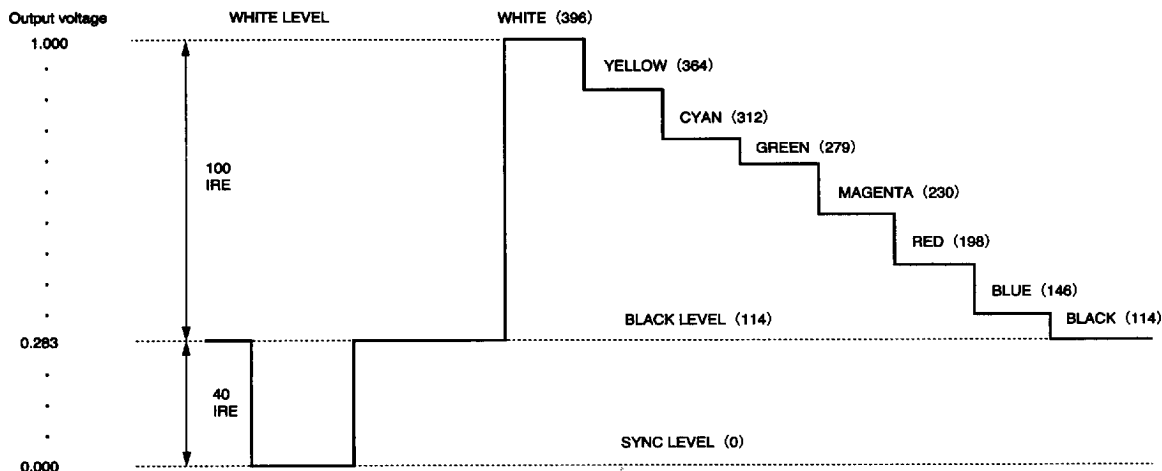

() Parentheses indicate the value of digital DAC output.
When output voltage = 37.5 Ω (external load), $V_{REF} = 1.29$ V, $I_R = 1.2$ K Ω

Fig. 3 PAL/PAL60 Y (luminosity) signal output level

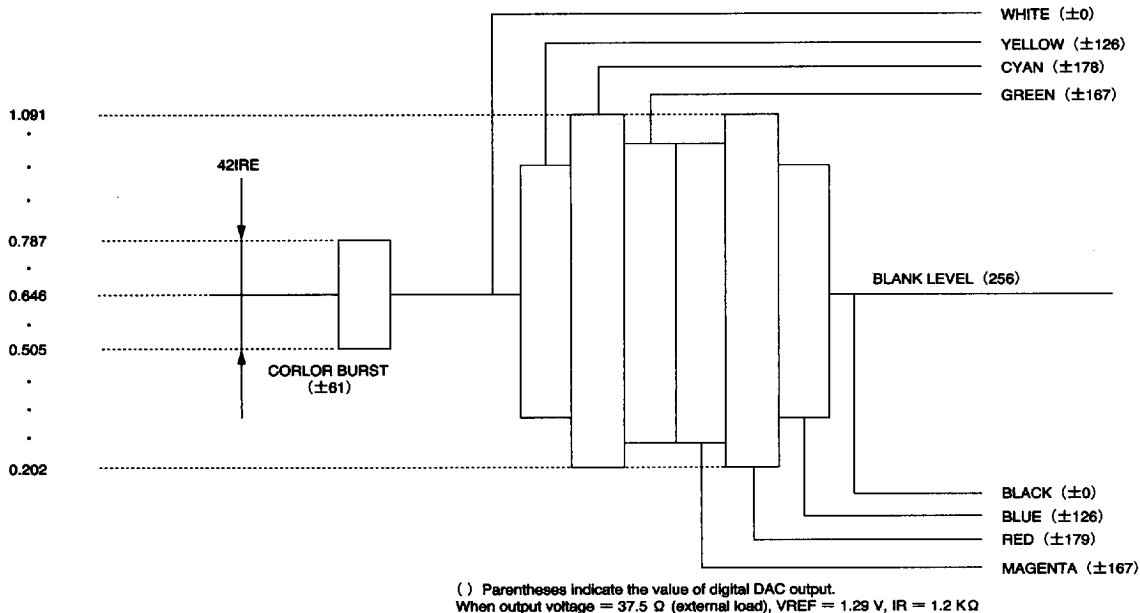


Fig. 4 PAL/PAL60 C (chroma) signal output level

7828999 0022077 78T


(4) Timing

The BU1419K is a digital encoder that outputs television signals in the NTSC, PAL or PAL60 format according to the inputs and outputs of VCLK, HSY and VSY. The timing input and output pins are shown in Table 4-1 below.

Table 4-1 : Timing input and output (BU1419K)

No	Pin	Name	Input/output	Function
1	52	RSTB	Input	System reset input
3	51	VCLK	Input	Clock input
4	53	CLKSW	Input	Clock input mode setting
5	27	CVSY	Input and output	Vertical and composite synchronization signal input and output
6	28	HSY	Input and output	Horizontal synchronization signal input and output
8	22	NTB	Input	Switching between the NTSC and PAL modes
9	50	PAL60B	Input	Switching between the PAL and PAL60 modes
10	30	BLKB	Input	Enabling data output immediately after the equivalent pulse (9H)
11	32	INT	Input	Switching between the interlaced and non-interlaced modes
12	33	SLABEB	Input	Switching between the master and slave modes
13	34	ADDH	Input	Adding 1 line in the non-interlaced mode

Digital NTSC/PAL encoders

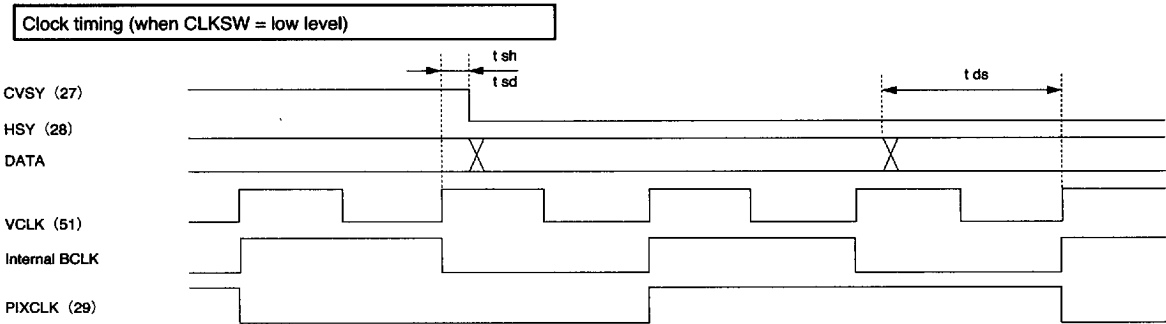

Multimedia video

Fig. 5 Clock timing and data input timing

Parameter	Symbol	Unit	Min.	Typ.	Max.
SYNC input hold time	t sh	nS	—	10.0	—
SYNC output delay time	t sd	nS	—	20.0	—
Data setup time	t ds	nS	—	15.0	—

In the slave mode, inputs to HSY and CVSY should be timed according to the timing for HSY (Fig. 5). In the master mode, synchronization signal output is output from HSY and CVSY according to the timing as shown in Fig. 5.

7828999 0022078 616

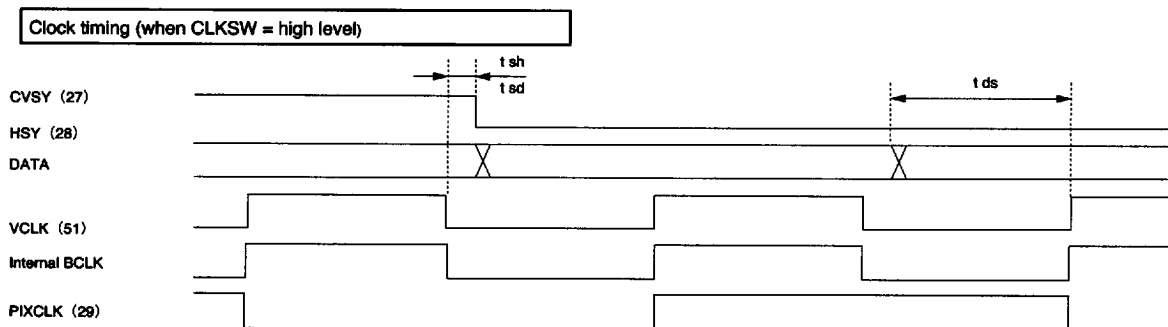


Fig. 6 Clock timing and data input timing

Parameter	Symbol	Unit	Min.	Typ.	Max.
SYNC input hold time	t_{sh}	nS	—	10.0	—
SYNC output delay time	t_{sd}	nS	—	20.0	—
Data setup time	t_{ds}	nS	—	15.0	—

In the slave mode, inputs to HSY and CVSY should be timed according to the timing for HSY (Fig. 6). In the master mode, synchronization signal is output from HSY and CVSY according to the timing as shown in Fig. 6.

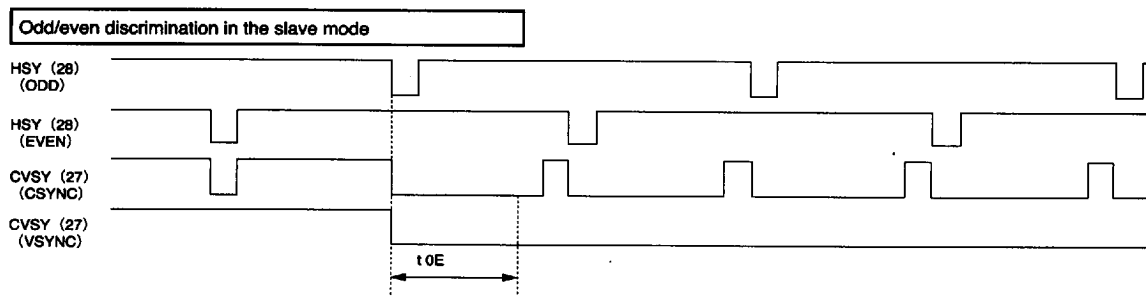


Fig. 7 Odd/even discrimination timing in the slave mode

Parameter	Symbol	Unit	Min.	Typ.	Max.
ODD/EVEN discrimination	t_{OE}	BCLK	—	128	—

In the slave mode, discrimination between odd and even is based on the timing shown above. Set the CSYNC equivalent pulse input to CVSY so that CVSY does not go to the high level until the time shown above has elapsed.

PIXCLK output timing

The frequency of the PIXCLK signal output by BU1417AK is 1 / 4 of VCLK when CLKSW is at the low level and 1 / 2 of VCLK when CLKSW is at the high level. PIXCLK is phase-corrected in synchronization with the rise of the input (or output) of HYS.

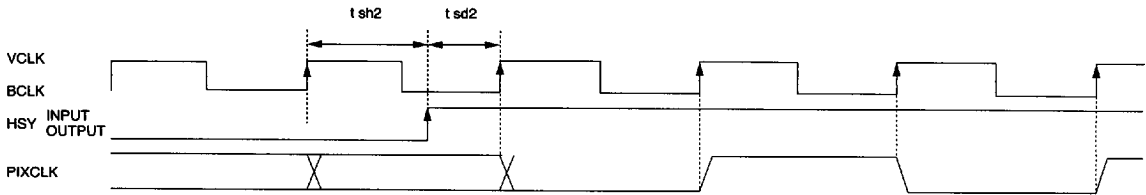


Fig. 8 PIXCLK output timing (when CLKSW = high)

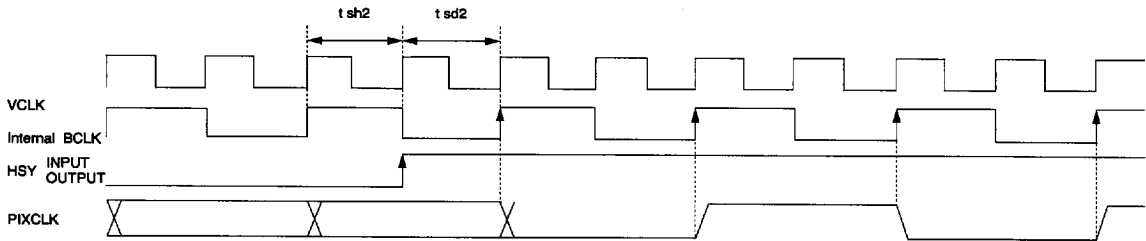


Fig. 9 PIXCLK output timing (when CLKSW = low)

Parameter	Symbol	Unit	Min.	Typ.	Max.
SYNC input hold time2	t sh2	nS	—	37.0	—
SYNC output delay time	t sd2	nS	—	37.0	—

Digital NTSC/PAL encoders
Multimedia video

Frame timing in the video CD mode (NTSC/PAL60 : interlaced)


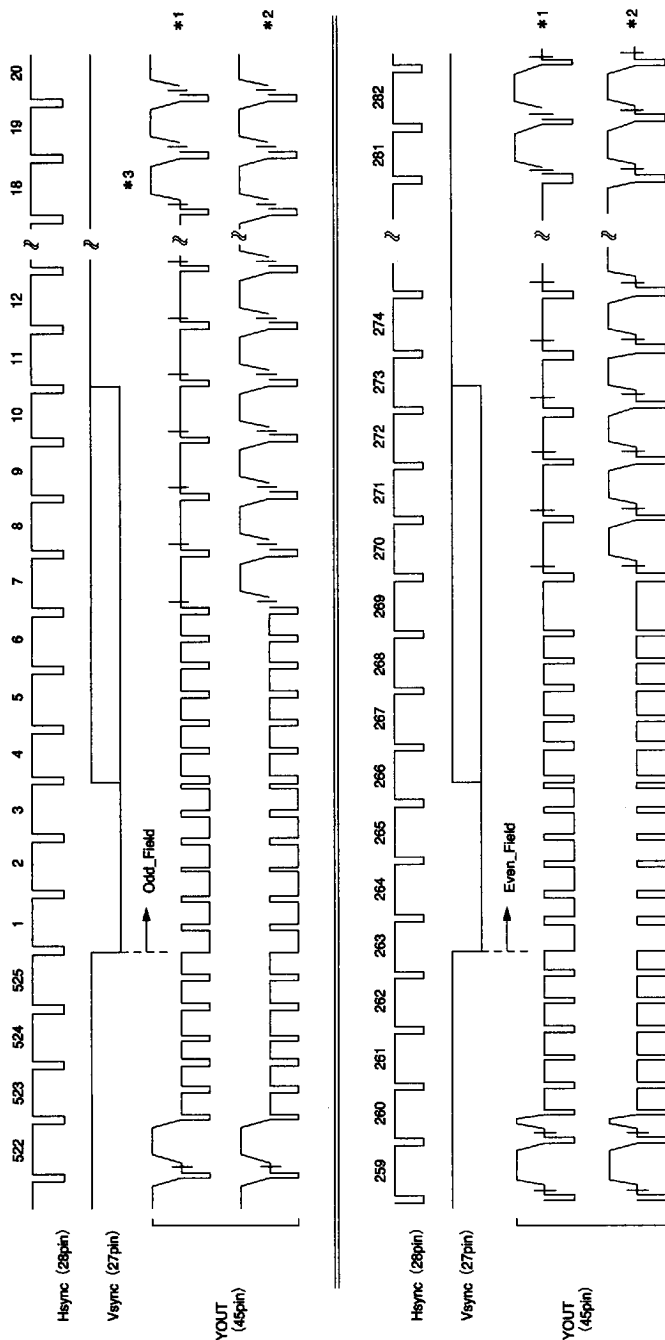


Fig. 10

Frame timing (PAL : interlaced)

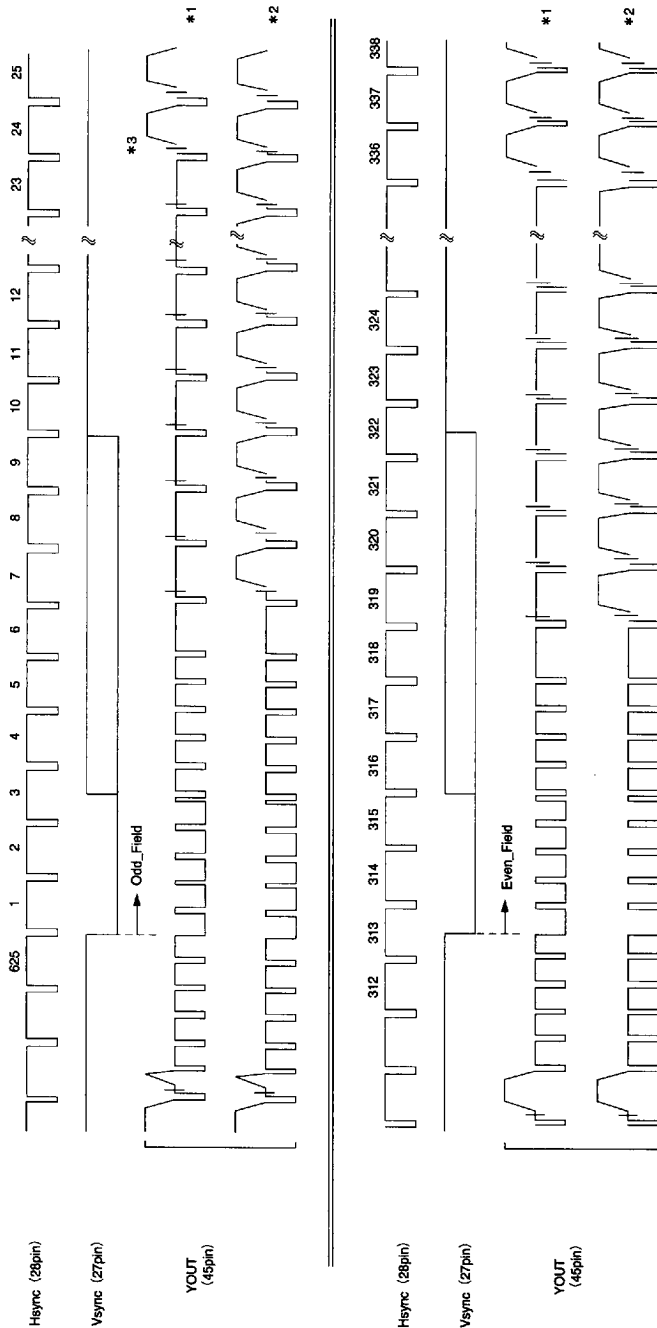

- *1 When BLKB (pin 30) is at the low level
- *2 When BLKB (pin 30) is at the high level
- *3 Indicates the line duration of video data output

Fig. 11

7828999 0022082 047

MUMI

Television signal timing diagram (NTSC)

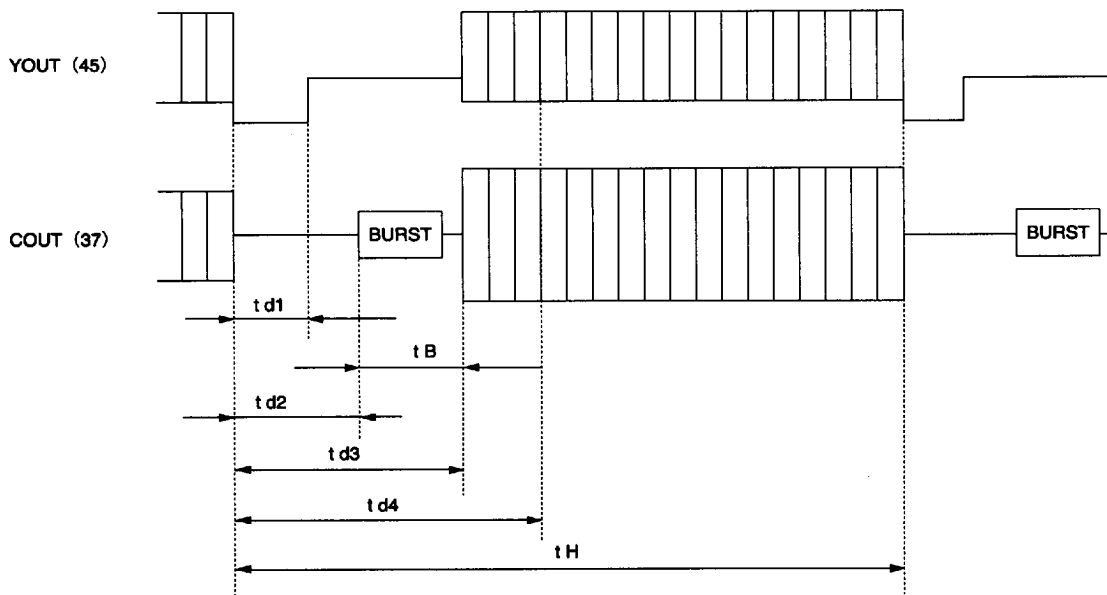


Fig. 12

Parameter	Symbol	Unit	Video - CD	Note
SYNC rise	t_{d1}	VCLK	128	Automatically generated by BU1419K
Burst start	t_{d2}	VCLK	142	Automatically generated by BU1419K
Burst end	t_{d3}	VCLK	212	Automatically generated by BU1419K
Data valid	t_{d4}	VCLK	254	Data input is blank during this period
Line duration	t_H	VCLK	1716	Hsync is input during this period
Burst cycle	t_B	f_{ec}	9	Automatically generated by BU1419K

* The VCLK counts above apply when CLKSW is at the low level.

7828999 0022083 T83

Television signal timing diagram (PAL/PAL60)

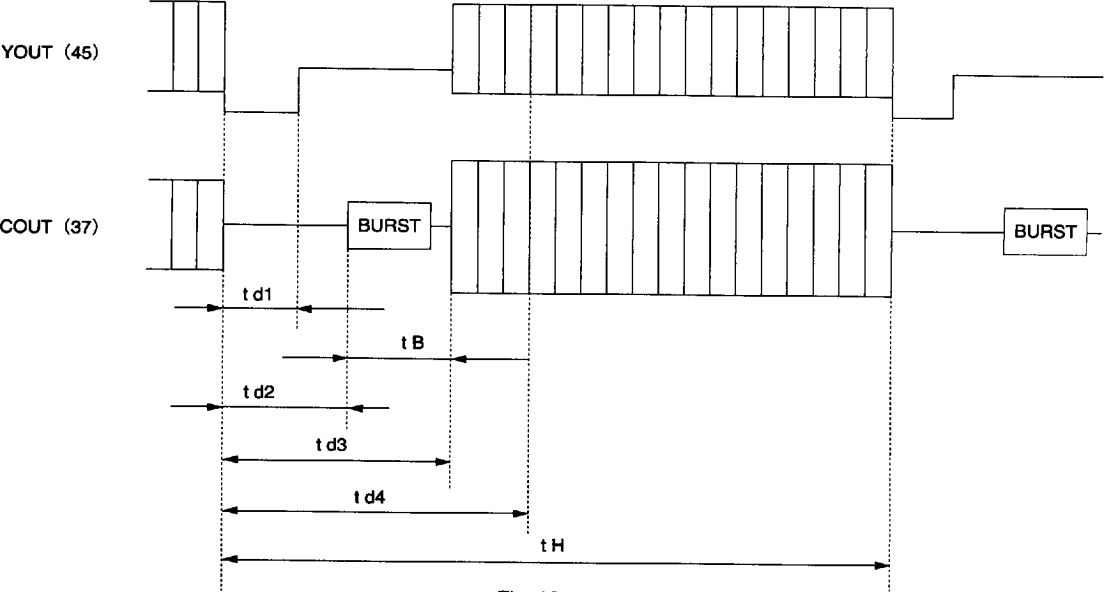


Fig. 13

Parameter	Symbol	Unit	PAL	PAL60	Note
SYNC rise	t d1	VCLK	128	128	Automatically generated by BU1419K
Burst start	t d2	VCLK	152	142	Automatically generated by BU1419K
Burst end	t d3	VCLK	212	212	Automatically generated by BU1419K
Data valid	t d4	VCLK	284	254	Data input is blank during this period
Line duration	t H	VCLK	1728	1716	Hsync is input during this period
Burst cycle	t B	f _{sc}	9	9	Automatically generated by BU1419K

* The VCLK counts above apply when CLKSW is at the low level.

Digital NTSC/PAL encoders

Multimedia video

7828999 0022084 91T

ROHM

(5) DAC output level adjustment

The DAC output level is determined by the internal DAC output current and the attached DAC output resistor. The output current of each DAC bit is determined by the VREF pin (pin 35) voltage and by the resistor attached to the IR pin (pin 42) (see below).

$$I(1\text{LSB}) = V_{\text{VREF}} / (R_{\text{IR}} + R_0) \times 1/16 \text{ [A]} \\ \dots \text{ (equation 5-1)}$$

VVREF : voltage impressed on VREF [V]

RIR : resistor attached to IR [Ω]

R0 : Internal parasitic resistance of IC [Ω]

Thus, when VVREF = 1.29V and RIR = 1.2k Ω , the current output for each LSB is 63.48 μ A. The white level of Y has a digital value of 396 (decimal) and therefore is calculated as follows :

$$V(Y \text{ white}) = 0.06348 \times 396 = 25.14 \text{ [mA]}$$

If a 37.5 Ω resistor is attached to DAC output, amplitude is 0.943 [V_{P-P}].


Similarly, when VVREF = 1.29V and RIR = 1.6k Ω , a per-LSB current of 48.28 μ A is output. The white level of the Y signal has a digital value of 396 (in decimal) and therefore equals the following :

$$V(Y \text{ white}) = 0.04828 \times 396 = 19.12 \text{ [mA]}$$

If a 50.0 Ω resistor is attached to DAC output, amplitude is 0.965 [V_{P-P}].

The DAC output level can be fine-tuned according to equation 5-1 on the left. Please contact ROHM when using constants that differ significantly from those above (i.e., output level = 1V_{P-P}, VVREF = 1.29V, RIR = 1.2k Ω or 1.6k Ω , attached DAC output resistor = 37.5 Ω or 50.0 Ω).

● Application example
(1) Slave mode example

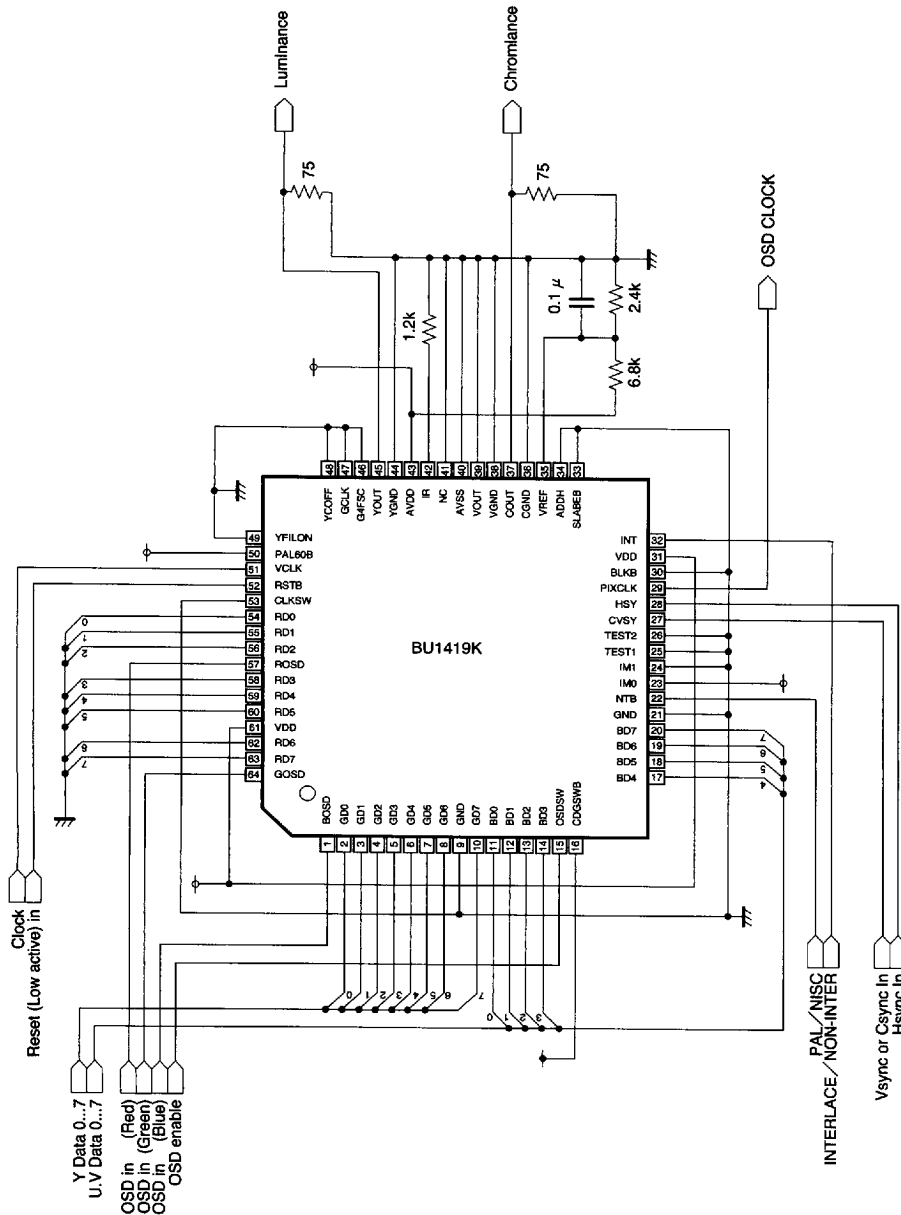

Clock input is the doubled clock signal (27. MHz)

Mode: YUV (4:2:2) input

DAC output 75 Ω pull-down (37.5 Ω load at video terminal)

Multimedia video

Digital NTSC/PAL encoders

Fig. 14

7828999 0022086 792

ROHM

Clock input is the singled clock signal (13.5MHz)

Mode: YUV (4:2:2) input


DAC output 100 Ω pull-down (50.0 Ω load at video terminal)

278

7828999 0022087 629

ROHMO

● External dimensions (Units: mm)

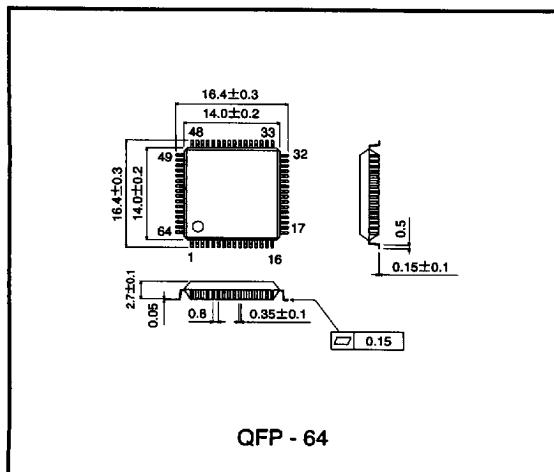

7828999 0022088 565

ROHM