


Reservoir  
Type CRVZS-...

made of corrosion-resistant stainless steel




Reservoirs, type CRVZS-... conform to EC Directive 87/404 and European Standard EN 286.

When these reservoirs are combined with time-delay and flow control valves, it is possible, to achieve very long delay times. The reservoirs can also be used to compensate for pressure fluctuations and act as an accumulator in cases of sudden air consumption.


The retaining clamps required for mounting are included.

For plugs, see sheet 9/60-1.

The distributor manifolds FR-12-PK-3 and FR-12-PK-4 (see sheet 9/65-2) can be used with small volumes of air. Capacity: 0.024 l.

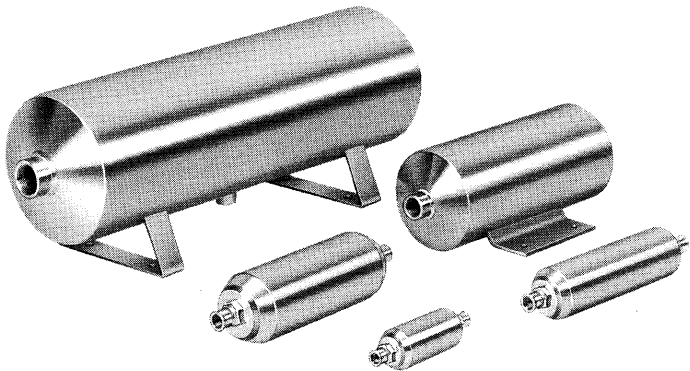


Type CRVZS-0.1  
CRVZS-0.4  
CRVZS-0.75

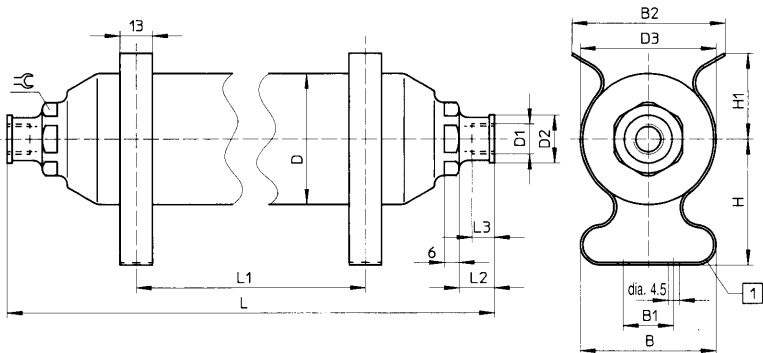

1 Retaining clamps

| Type       | B<br>±2 | B <sub>1</sub> | B <sub>2</sub><br>±2 | D<br>dia. | D <sub>1</sub><br>dia. | D <sub>2</sub><br>dia. | D <sub>3</sub><br>dia. | H<br>±1 | H <sub>1</sub><br>±1 | L<br>±1 | L <sub>1</sub><br>min. | L <sub>1</sub><br>max. | L <sub>2</sub> | L <sub>3</sub> | ⌀  |
|------------|---------|----------------|----------------------|-----------|------------------------|------------------------|------------------------|---------|----------------------|---------|------------------------|------------------------|----------------|----------------|----|
| CRVZS-0.1  | 51      | 14             | —                    | 40        | G 1/8                  | 15                     | 42                     | 43      | 28                   | 132     | 13                     | 50                     | 10             | 6              | 19 |
| CRVZS-0.4  | 54      | 14             | —                    | 52        | G 1/4                  | 19                     | 54                     | 50      | 34                   | 240     | 13                     | 150                    | 14             | 9              | 27 |
| CRVZS-0.75 | 60      | 20             | 79                   | 70        | G 1/4                  | 19                     | 72                     | 61      | 34                   | 248     | 13                     | 140                    | 14             | 9              | 27 |

Type CRVZS-2

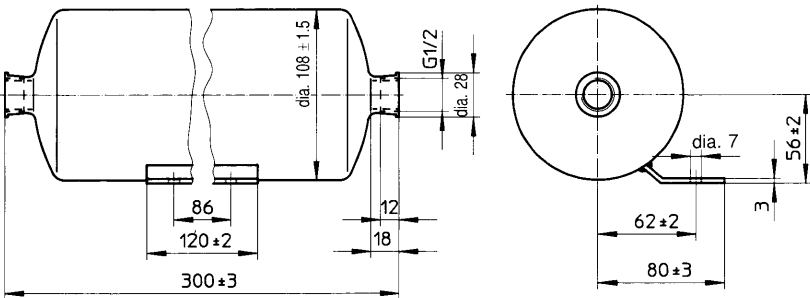

| Order code<br>Part No./Type | 160 233<br>CRVZS-0.1                                  | 160 234<br>CRVZS-0.4 | 160 235<br>CRVZS-0.75 | 160 236<br>CRVZS-2 | 160 237<br>CRVZS-10 |
|-----------------------------|-------------------------------------------------------|----------------------|-----------------------|--------------------|---------------------|
| Medium                      | Compressed air, filtered (lubricated or unlubricated) |                      |                       |                    |                     |
| Design                      | Seamless                                              |                      |                       |                    |                     |
| Mounting                    | Retaining clamps                                      |                      |                       | Mounting bracket   |                     |
| Connection                  | G 1/8                                                 | G 1/4                | G 1/4                 | G 1/2              | G 1, G 3/8          |
| Volume                      | 0.1 l                                                 | 0.4 l                | 0.75 l                | 2 l                | 10 l                |
| Pressure range              | -0.95 to 16 bar                                       |                      |                       |                    |                     |
| Temperature range           | Depends on tubing or tube                             |                      |                       |                    |                     |
| Material                    | X 5 CrNi 18 10, bracket: X 12 CrNi 17 7               |                      |                       |                    |                     |
| Weight                      | 0.226 kg                                              | 0.543 kg             | 0.736 kg              | 1.681 kg           | 6.459 kg            |