

## Single head system UCC1000-30GM-IU-V1




### Features


- Current and voltage output
- High chemical resistance through teflon-coated transducer surface
- 12 bit D/A transducer
- Evaluation limits can be taught-in
- Temperature compensation
- Compact construction
- Plug connection

### Electrical connection

Standard symbol/Connection:



### Dimensions

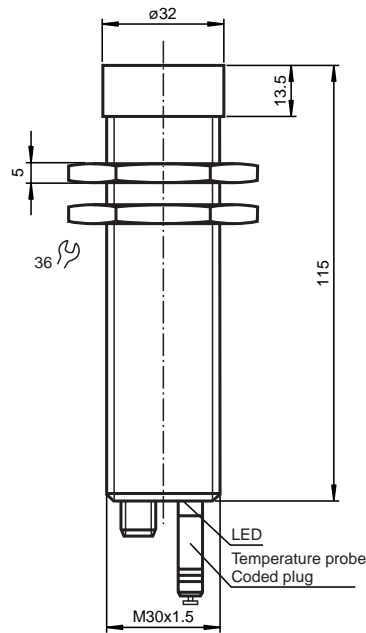

### Technical data

#### General specifications

Sensing range	200 ... 1000 mm
Standard target plate	100 mm x 100 mm
Unusable area	0 ... 200 mm
Transducer frequency	approx. 175 kHz
Response delay	≤ 100 ms
Standard conformity	EN 60947-5-2

#### Indicating/Operating means

LED yellow

permanently yellow: object in the evaluation range  
yellow, flashing: Teach-in function evaluation limits, slope  
permanent green: Power on green, flashing: TEACH-IN function,  
object detected permanently red: Connector removed red, flashing:  
Error, teach-in function object not detected

LED red/green

Temperature/TEACH-IN connector

Temperature compensation, TEACH-IN of the switch points, output  
function change over

#### Electrical specifications

Rated operational voltage $U_e$	10 ... 30 V DC, ripple 10 % <sub>SS</sub>
Power consumption $P_0$	≤ 800 mW

#### Output

Output type

1 current output 4 ... 20 mA  
1 voltage output 0 ... 10 V

Repeat accuracy

≤ 0.1 % of final value

Resolution

depending on the set evaluation range:  
0.172 mm, if evaluation range < 705 mm,  
evaluation range [mm] / 4096, if evaluation range > 705 mm

Deviation of the characteristic  
curve

≤ 0.2 % of final value

Load impedance

current output: ≤ 500 Ohm  
Voltage output: ≥ 1000 Ohm

Temperature influence

< 2 % of full-scale value  
(≤ 0.2 % / K without temperature compensation)

#### Ambient conditions

Ambient temperature	-25 ... +70 °C (248 ... 343 K)
Storage temperature	-40 ... +85 °C (233 ... 358 K)

#### Mechanical specifications

Protection degree	IP65 according to EN 60529
Connection type	V1 connector (M12 x 1), 4 pin

Material

Housing  
Transducer

high grade steel (stainless), PTB  
epoxy resin/hollow glass bead mixture; Polyurethane foam, PTFE  
coated

Mass

188 g

052203\_e

17.08.2001

## Note

### Notes:

This ultrasonic sensor features a four-pole temperature/TEACH-IN plug that can be connected in four different positions. These have the following significance.

Plug position	Meaning
A1	Teach evaluation limit A1
A2	Teach evaluation limit A2
E2/E3	Switching: falling/rising ramp
T	Temperature compensation

Description of the TEACH-IN procedure:

- Remove temperature plug
- Cut and restore supply voltage (e.g. by removing and replacing unit plug)

TEACH-IN of evaluation limits A1 and A2:

- Set object to desired evaluation limit
- Connect TEACH-IN plug in pos. A1 or A2
- Green LED flashes when object detected, red LED flashes when no object detected
- Pull the plug (the current object position is taught and stored when the plug is removed!)

TEACH-IN of output function:

- Connect TEACH-IN plug in pos. E2/E3
- The yellow LED indicates the output function
  - E2: falling ramp
  - E3: rising ramp
- Pull the plug when the desired function is activated, otherwise reconnect the TEACH-IN plug in pos. E2/E3
- Pull plug

Completing the TEACH-IN procedure:

- Connect TEACH-IN plug in pos. T. Temperature compensation is now activated.

Note:

If the temperature plug has not been plugged in within 5 minutes, the sensor will return to normal mode without temperature compensation.

Displays depending on position of temperature/TEACH-IN plug position	Green dual LED	Red dual LED	Yellow LED A1/ ↖	Yellow LED A2/ ↗
Teach switching point output A1				
Object detected	Flashing	Off	Flashing	Off
No object detected	Off	Flashing	Flashing	Off
Teach switching point output A2				
Object detected	Flashing	Off	Off	Flashing
No object detected	Off	Flashing	Off	Flashing
TEACH-IN of switch output functions:				
E2: 2 independent switching positions	On	Off	Flashing	Off
E3: window function	On	Off	Off	Flashing
Normal mode, temperature compensated	On	Off	on/off <sup>1)</sup>	on/off <sup>1)</sup>
Plug pulled or shorted	Off	On	on/off <sup>1)</sup>	on/off <sup>1)</sup>
Interference (e.g. compressed air)	Off	Flashing	Previous state	Previous state


<sup>1)</sup> on: object within evaluation range; off: no object within evaluation range

## Model number

UCC1000-30GM-IU-V1

## Characteristic curves/ Additional information


### Characteristic response curves

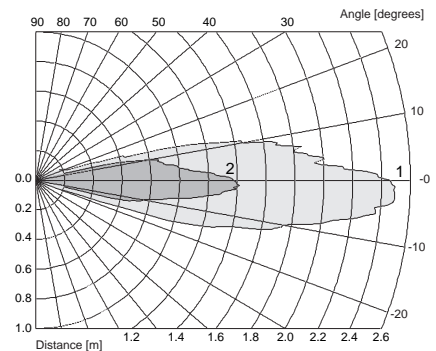

Curve 1: flat plate 100 mm x 100 mm  
Curve 2: round bar, Ø 25 mm

### Programmed analogue output function

Analogue function

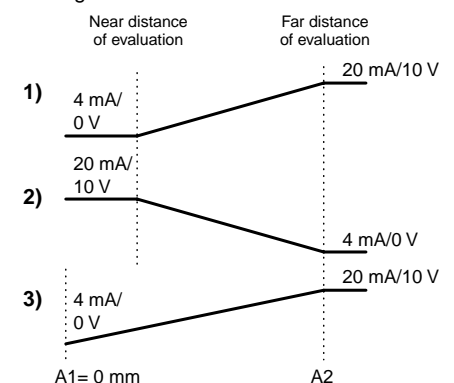

### LED-Window

