





IDC D-Sub Connectors

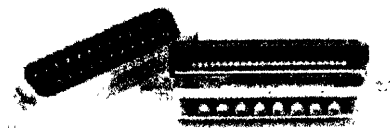

IDC Plugs Stamped Contacts

Tin and Dimple Shells
Black Insulators and IDC Crimp Backshell
Selective Gold/Tin Plated Contacts
1.5 micron Tin and 0.2 micron Gold

With 3.1mm Diameter Mounting Holes

No. of Ways	MH Part No.	FEC Part No.
9 Way	MH 10551	154-805
15 Way	MH 10552	154-817
25 Way	MH 10553	154-829
37 Way	MH 10554	154-830

With 4-40UNC Clinchmounts Rear Mounted

No. of Ways	MH Part No.	FEC Part No.
9 Way	MH 10567	154-830
15 Way	MH 10568	154-891
25 Way	MH 10569	154-908
37 Way	MH 10570	154-910

IDC Sockets Stamped Contacts

Tin Shells
Black Insulators and IDC Crimp Backshell
Selective Gold/Tin Plated Contacts
1.5 micron Tin and 0.2 micron Gold

With 3.1mm Diameter Mounting Holes

No. of Ways	MH Part No.	FEC Part No.
9 Way	MH 10575	154-842
15 Way	MH 10576	154-854
25 Way	MH 10577	154-866
37 Way	MH 10578	154-878

With 4-40UNC Clinchmounts Rear Mounted

No. of Ways	MH Part No.	FEC Part No.
9 Way	MH 10591	154-921
15 Way	MH 10592	154-933
25 Way	MH 10593	154-945
37 Way	MH 10594	154-957

Technical Data

Electrical Specification

Working Current	1.5A
Test Voltage	1000V
Insulation Resistance	5000MΩm
Contact Resistance	less than 10mΩm
Temperature Range	-55 to + 125 °C

Material Specification

Insulator	Glass Filled Polyester Black UL94 V-0
Shell	Stamped Steel Tin Plated
Contacts	Copper Alloy
Contact Plating	1.5 micron Tin 0.2 micron Gold