



SAW Components

Data Sheet B4125

Data Sheet






Ceramic package **DCC6C**


Features

- Low-loss RF filter for AMPS mobile telephone system, receive path
- Low amplitude ripple
- Usable passband 25 MHz
- Ceramic package for **Surface Mounted Technology (SMT)**



Terminals


- Ni, gold-plated



Dimensions in mm, approx. weight 0,037 g

Pin configuration

- | | |
|------------|------------------------|
| 2 | Input |
| 5 | Output |
| 1, 3, 4, 6 | Ground, to be grounded |



Type	Ordering code	Marking and Package according to	Packing according to
B4125	B39881-B4125-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	$-30 / +85$	$^{\circ}\text{C}$	source impedance 50 Ω
Storage temperature range	T_{stg}	$-40 / +85$	$^{\circ}\text{C}$	
DC voltage	V_{DC}	3	V	
Input power max.	P_{IN}	5	dBm	




Characteristics

Operating temperature range: $T = -30 \text{ to } +85 \text{ }^{\circ}\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$


			min.	typ.	max.	
Center frequency	f_C		—	881,5	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$					
	869,0 ... 894,0 MHz		—	2,6	3,0	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
	869,0 ... 894,0 MHz		—	1,1	1,5	dB
VSWR						
	869,0 ... 894,0 MHz		—	1,5	1,6	
Attenuation	α					
	0,0 ... 824,0 MHz		35,0	50,0	—	dB
	824,0 ... 849,0 MHz		35,0	45,0	—	dB
	970,0 ... 997,0 MHz		35,0	60,0	—	dB
	997,0 ... 1150,0 MHz		40,0	60,0	—	dB
	1150,0 ... 1500,0 MHz		30,0	50,0	—	dB
	1500,0 ... 2000,0 MHz		25,0	38,0	—	dB
	2000,0 ... 3000,0 MHz		20,0	25,0	—	dB



Transfer function


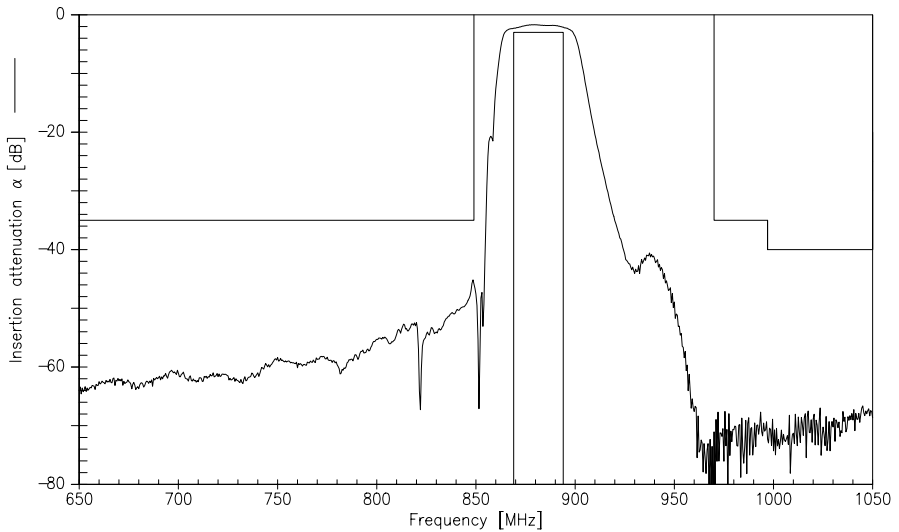


Transfer function (wideband)

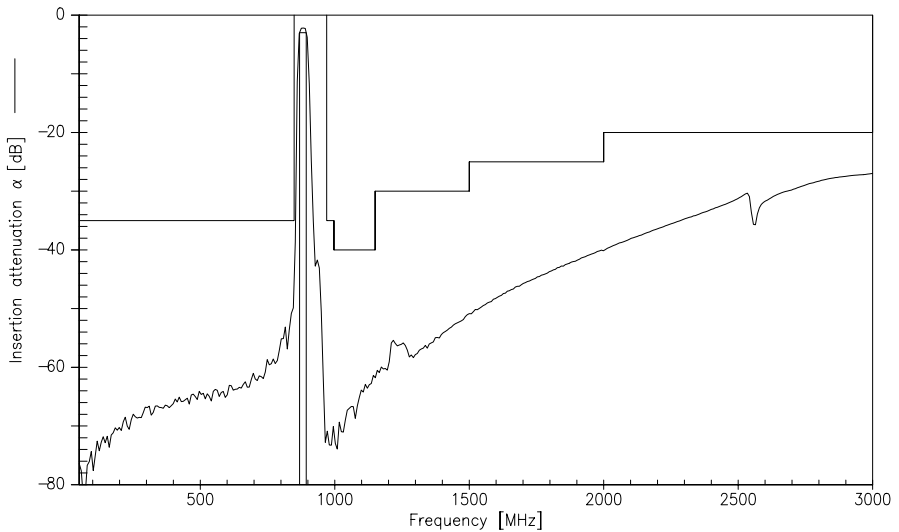



Reflection functions

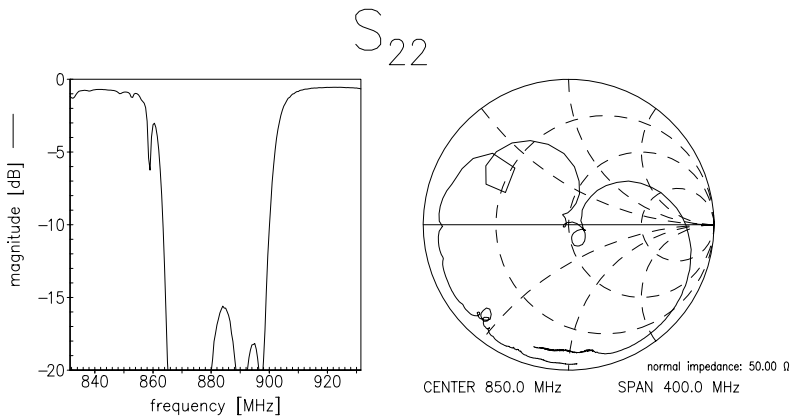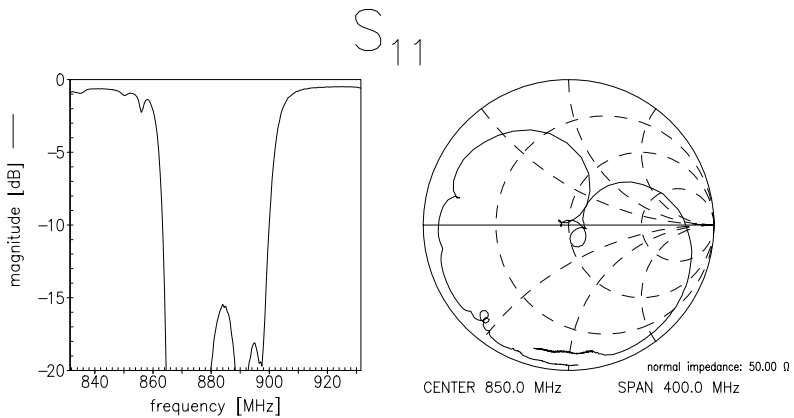



Published by EPCOS AG

Surface Acoustic Wave Components Division, OFW E MF

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.