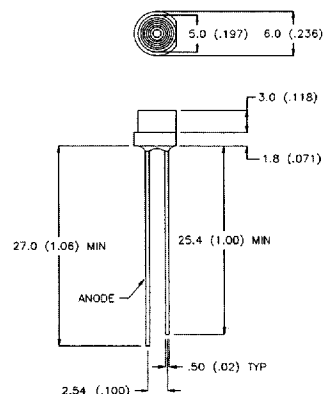

SSL-LX433 SERIES T-4.9 SHORT PROFILE FREZEL LENS LED

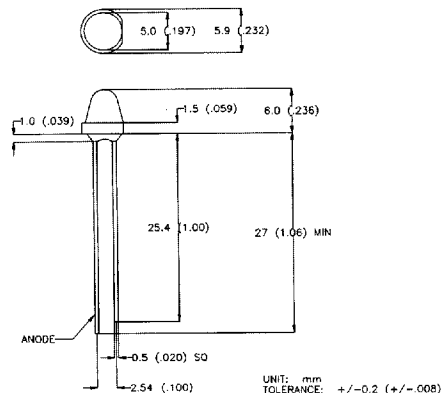
FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
• Four Color Options • Bi-Color Version • Long Life/Low Power • Special Lens Finish			• Panel Indicators • Status Illumination • Switches/Keyboards • Wide Angle Indicators			• Add-on Spacers • Add-on Leads • Panel Mounting Hardware • P.C. Mounting Options		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	VIEW ANGLE	VI@20mA		
SSL-LX433ID	RED	635	RED DIFF.	6	20	120	2.0	2.8
SSL-LX433SRD	RED	660	RED DIFF.	25	20	120	1.7	2.2
SSL-LX433GD	GREEN	565	GREEN DIFF.	6	20	120	2.1	2.8
SSL-LX433YD	YELLOW	585	YELLOW DIFF.	6	20	120	2.1	2.8
BI-COLOR OPTIONS SSL-LX433HGW	RED/GREEN	695/565	WHITE DIFF.		20/20	120	2.0	2.8

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

SSL-LX5063 SERIES T-4.9 SHORT PROFILE LEDS LAMPS

FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
• Four Color Options • Bi-Color Version • Long Life/Low Power			• Panel Indicators • Status Illumination • Switches/Keyboards • Backlighting Legends			• Add-on Spacers • Add-on Leads • Panel Mounting Hardware • P.C. Mounting Options		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	VIEW ANGLE	VI@20mA		
SSL-LX5063ID	RED	635	RED DIFF.	12	20	100	2.0	2.8
SSL-LX5063SRD	RED	660	RED DIFF.	40	20	100	1.7	2.2
SSL-LX5063GD	GREEN	565	GREEN DIFF.	12	20	100	2.1	2.8
SSL-LX5063YD	YELLOW	585	YELLOW DIFF.	12	20	100	2.1	2.8
BI-COLOR OPTIONS SSL-LX5063HGW	RED/GREEN	695/565	WHITE DIFF.	6/6	20/20	100	2.0	2.8

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm


UNIT: mm
TOLERANCE: +/-0.2 (+/- .008)

SSF-LX5093XD SERIES T-5 DIFFUSED LENS POPULAR LEDS

FEATURES			APPLICATIONS			OPTIONS AVAILABLE		
• Diffused Lenses • Popular Styles • Three Color Choices • Low Current Options			• Indicator-Panel/P.C. • Switches • Data Line Indicators • Legend Illuminations			• Add-on Spacers • Add-on Insulated Leads • P.C. and Panel Mount Hardware		
LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	EPOXY LENS COLOR	BRIGHTNESS TYP.(mcd.)	VIEW ANGLE	VI@ 20mA		
SSL-LX5093ID	RED	635	RED DIFF.	20	20	80	2.0	2.8
SSL-LX5093SRD	RED	660	RED DIFF.	80	20	80	1.7	2.2
SSL-LX5093GD	GREEN	565	GREEN DIFF.	20	20	80	2.1	2.8
SSL-LX5093YD	YELLOW	585	YELLOW DIFF.	20	20	80	2.1	2.8
BI-COLOR OPTIONS SSL-LX5093IGW	RED/GREEN	635/565	WHITE DIFF.	12/12	20/20	80	2.0	2.8
LOW CURRENT OPTIONS								
SSL-LX5093LID	RED	635	RED DIFF.	1.5	2	80	2.0	2.8
SSL-LX5093LGD	GREEN	565	GREEN DIFF.	1.5	2	80	2.1	2.8
SSL-LX5093LYD	YELLOW	585	YELLOW DIFF.	1.5	2	80	2.1	2.8
SSL-LX5093SRD	RED	660	RED DIFF.	2.0	2	80	1.7	2.2

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm
