

## FYLP-3W-UWWS


### Features:

- Long operating life
- Highest flux
- Available in Warm White
- Lambertian radiation pattern
- More energy efficient than incandescent and most halogen lamps
- Low voltage DC operated
- Cool beam, safe to the touch
- Instant light (less than 100ns)
- Fully dimmable
- No UV
- Superior ESD protection
- Eutectic die band, lower Rth.
- ROHS compliant –Lead-free
- Instant light (less than 100ns)


### Applications

- Reading lights (car, bus, aircraft)
- Portable (flashlight, bicycle)
- orientation
- Mini-accent
- Decorative
- Fiber optic alternative
- Appliance
- Sign and channel letter
- Architectural detail
- Cove lighting
- Automotive exterior ( stop-Tail-turn, CHMSL, Mirror side repeat)
- Edge-lit signs (Exit, point of sale)

### Radiation Pattern

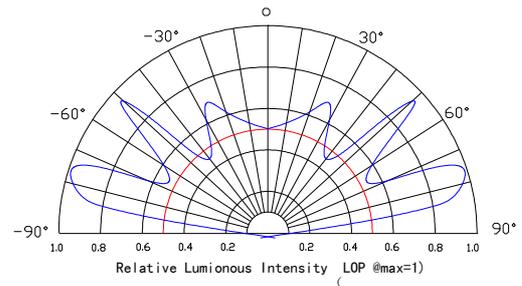

### Package Dimensions

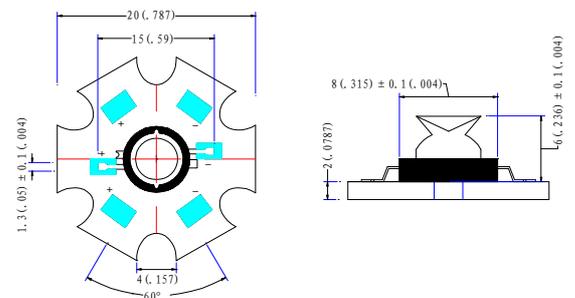

■ **Typical Optical/Electrical Characteristics@T<sub>J</sub>=25°C**

| Item                                 | symbol            | Condition             | Min  | Typ  | Max  | Unit |
|--------------------------------------|-------------------|-----------------------|------|------|------|------|
| Forward Voltage                      | V <sub>F</sub>    | I <sub>F</sub> =800mA | 3.2  | 3.4  | 4.0  | V    |
| Reverse Current                      | I <sub>R</sub>    | V <sub>R</sub> =5V    |      |      | 50   | μA   |
| 50% Power Angle                      | 2θ <sub>1/2</sub> | I <sub>F</sub> =800mA | -    | 175  | -    | deg  |
| Luminous Intensity                   | Φ <sub>v</sub>    | I <sub>F</sub> =800mA | 90   | 100  |      | LM   |
| <b>Chromaticity coordinates</b>      | X                 | I <sub>F</sub> =350mA |      | 0.40 |      |      |
|                                      | Y                 |                       |      | 0.39 |      |      |
| Recommend Forward Current            | I <sub>F</sub>    |                       |      | 350  |      | mA   |
| CCT                                  |                   | F=800mA               | 2800 | --   | 3800 | K    |
| Thermal Resistance, Junction to Case | R <sub>jc</sub>   | I <sub>F</sub> =800mA |      | 10   |      | °C/W |

- Notes: 1. Tolerance of measurement of forward voltage ± 0.1v;  
 2. Tolerance of measurement of peak Wavelength ± 2.0nm;  
 3. Tolerance of measurement of luminous intensity ± 15%;

■ **Absolute Maximum Rating.**

| Item                        | symbol           | Absolute Maximum Rating | Unit |
|-----------------------------|------------------|-------------------------|------|
| Forward Current             | I <sub>F</sub>   | 800                     | mA   |
| Peak Forward Current*       | I <sub>FD</sub>  | 1200                    | mA   |
| Reverse Voltage             | V <sub>R</sub>   | 5                       | V    |
| Power Dissipation           | P <sub>D</sub>   | 3000                    | mW   |
| Electrostatic discharge     | ESD              | ± 4500                  | V    |
| Operation Temperature       | T <sub>OPR</sub> | -30°C to +80°C          |      |
| Storage Temperature         | T <sub>STG</sub> | -40°C to +100°C         |      |
| Lead Soldering Temperature* | T <sub>SOL</sub> | 260°C for 3 Seconds Max |      |

- IFP Conditions :Pulse Width ≤10 msec duty ≤1/10
- All high Power emitter LED products mounted on aluminum metal-core printed circuit board, can be lighted directly ,but we do not recommend lighting the high power products for more than 5 seconds without a directly,but we do not recommend lighting the high powe products for more than 5 seconds without a appropriate heat dissipation equipment.
- Re-flow, wave peak and soak-stannum soldering etc. is not suitable for this products.
- Suggest to solder it by professional high power LED soldering machine.
- Can use invariable -temperature searing-iron with soldering condition: ≤260 degree less than 3 seconds.



# HIGH POWER

## ■ Typical optical/Electrical Characteristics Curves (Tj=25°C Unless Otherwise Noted)

