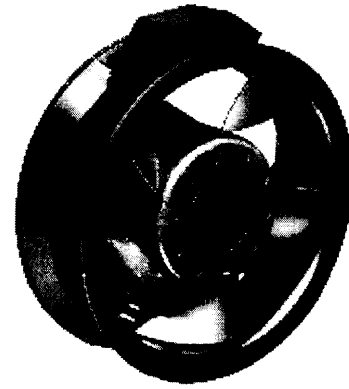
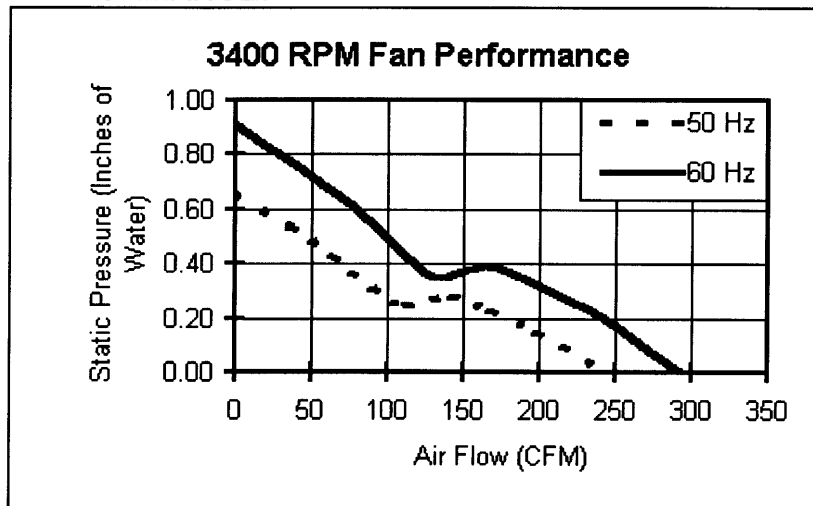


Falcon® AC**AC Tubeaxial Fan****FEATURES:**

- Size: 6.75" x 2.17" deep (172mm x 55mm)
- Air Flow: 300 CFM
- Voltage: 115 & 230 VAC (50/60 Hz)
- Operating Temperature Range: -10°C to +70°C
- Storage Temperature Range: -40°C to +85°C
- Ball Bearings
- Terminals
- Weight: 1.84 Lbs. (.84 Kg)

**PERFORMANCE:****SPECIFICATIONS:**

Model No.	Part No.	VAC	Watts	Running Current (Amps)	Locked Rotor Current (Amps)	RPM	CFM	dBA	Features
FA2B3	031659	115	41.1	0.36	0.72	3400	300	56.5	2, 3
FA77B3	031660	230	41.4	0.18	0.36	3400	300	56.5	2, 3

Click here to view diagram - [FalconAC.gif \(100K\)](#)

FEATURES:

1. Leadwires
2. Terminals
3. Ball Bearings

4. Sleeve Bearings
5. Tachometer Output
6. Thermal Speed Control
7. Programmable Speed Control
8. Fan Performance Sensor

MOTOR:

- Two-Pole Permanent Split Capacitor Motor, Single Phase
- Capacitor - Dry Polyester Film
- Insulation Class B
- Ball Bearings
- Impedance Protected
- 100% Dielectric Tested

CONSTRUCTION:

- Venturi - Single Piece Die Cast Aluminum, Black
- Propeller - Polycarbonate, Black, UL94V-0

LIFE EXPECTANCY:

- L10 Data - 50,000 hrs, @ 40°C

OPTIONS:

- Customized Harness Assemblies
- Fan Performance Sensors

 [Back to AC Axial Fans Menu](#)

[Home](#) | [Products](#) | [Competitor Cross-Reference Search](#) | [Product Data Sheet](#)
[Engineering Notes](#) | [Stock Check / Order](#) | [About Us](#) | [What's New](#) | [Contact Us](#)

Copyright © 1997-2000, Comair Rotron
2675 Customhouse Court, San Diego, CA 92154-7619. All Rights Reserved