

KVR400X64C3AK2/256

256MB (128MB 16M x 64-Bit x 2 pcs.)
DDR400 CL3 184-Pin DIMM Kit

DESCRIPTION:

ValueRAM's KVR400X64C3K2/256 is a kit of two 16M x 64-bit (128MB) CL3 DDR400 SDRAM (Synchronous DRAM) memory modules. Total kit capacity is 256MB. The components on each module include four 16M x 16-bit (4M x 16-bit x 4 Bank) DDR400 SDRAM in TSOP packages. Each 184-pin DIMM uses gold contact fingers and requires +2.6V. The electrical and mechanical specifications are as follows:

FEATURES:

✓ Clock Cycle Time (tCK)	5ns (min.) / 10ns (max.)
✓ Row Cycle Time (tRC)	55ns (min.)
✓ Refresh Row Cycle Time (tRFC)	70ns (min.)
✓ Row Active Time (tRAS)	40ns (min.) / 70,000ns (max.)
✓ Single Power Supply of	+2.6V (+/- .1V)
✓ Power (IDD0)	0.975 W (operating)
✓ UL Rating	94 V - 0

Note: The module defined in this data sheet is one of several configurations available under this part number. While all configurations are compatible, the DRAM combination and/or the module height may vary from what is described here. However, in no configuration will the module height exceed 1.250" (31.75mm).

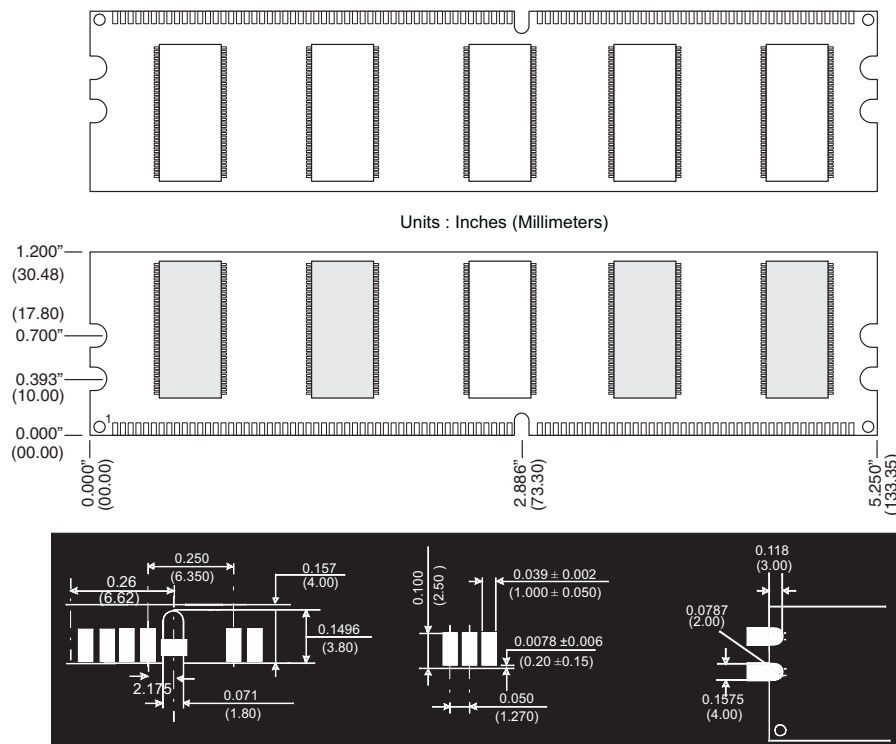


Figure 1: KVR400X64C3AK2/256 184-Pin DIMM