



Features


- ◇ For IF SAW filter
- ◇ Single-ended operation
- ◇ Ceramic Surface Mount Package
- ◇ Small size
- ◇ RoHS compliant (2002/95/EC), Pb-free

Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	-	830	-
Insertion Loss	dB	-	24.4	26
1.5 dB Bandwidth	MHz	10	11.08	-
3 dB Bandwidth	MHz	-	11.55	-
40 dB Bandwidth	MHz	-	14.24	15
Passband Variation	dB	-	1.2	1.5
Absolute Delay	usec	-	1.34	-
Ultimate Rejection($f_0 \pm 7.5\text{MHz}$)	dB	40	43	-
Ambient Temperature	°C	25		
DC Voltage	V	0		
Input Power	dBm	-	-	10
ESD Class	-	1C		
Package Size	SMD13.3*6.5			

Notes:

1. All specifications are based on the test circuit shown;
2. In production, all specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature;
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances;
4. This is the optimum impedance in order to achieve the performance show.

	SIPAT Co., Ltd. (CETC No.26 Research Institute) #14 Nanping Huayuan Road, Chongqing, China, 400060	Part Number	LBS83004	
		Rev. Date	2010-11-12	
		Ver.	1.0	Page 1/3


Matching Configuration

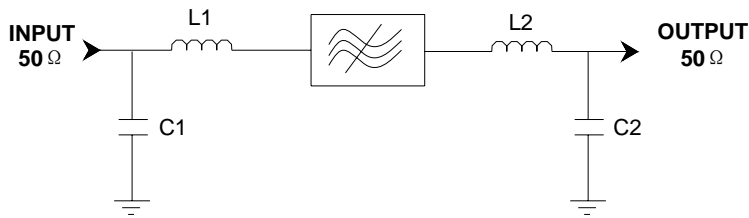

L1=6.8nH L1=3.3nH
C1=6.8pF C2=10pF
Source/Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

Package Dimension

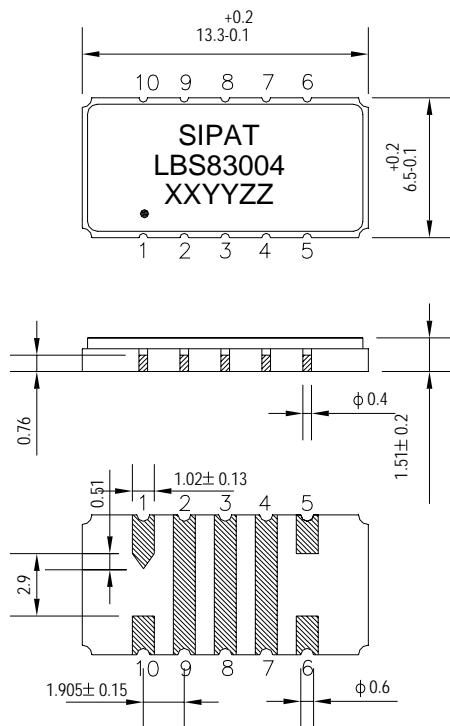

Pad Configuration:

Input: 10
Output: 5
Ground: All Others

Marking Configuration:

- 1) •: Pad Number 1 Index
- 2) SIPAT: Manufacturer Name
- 3) LBS83004: Part Number
- 4) XXYY: Date(Year/month)
- 5) ZZ: Identified Code

Package: SMD13.3*6.5

Unit: mm




SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS83004	
Rev. Date	2010-11-12	
Ver.	1.0	Page 2/3



Typical Performance

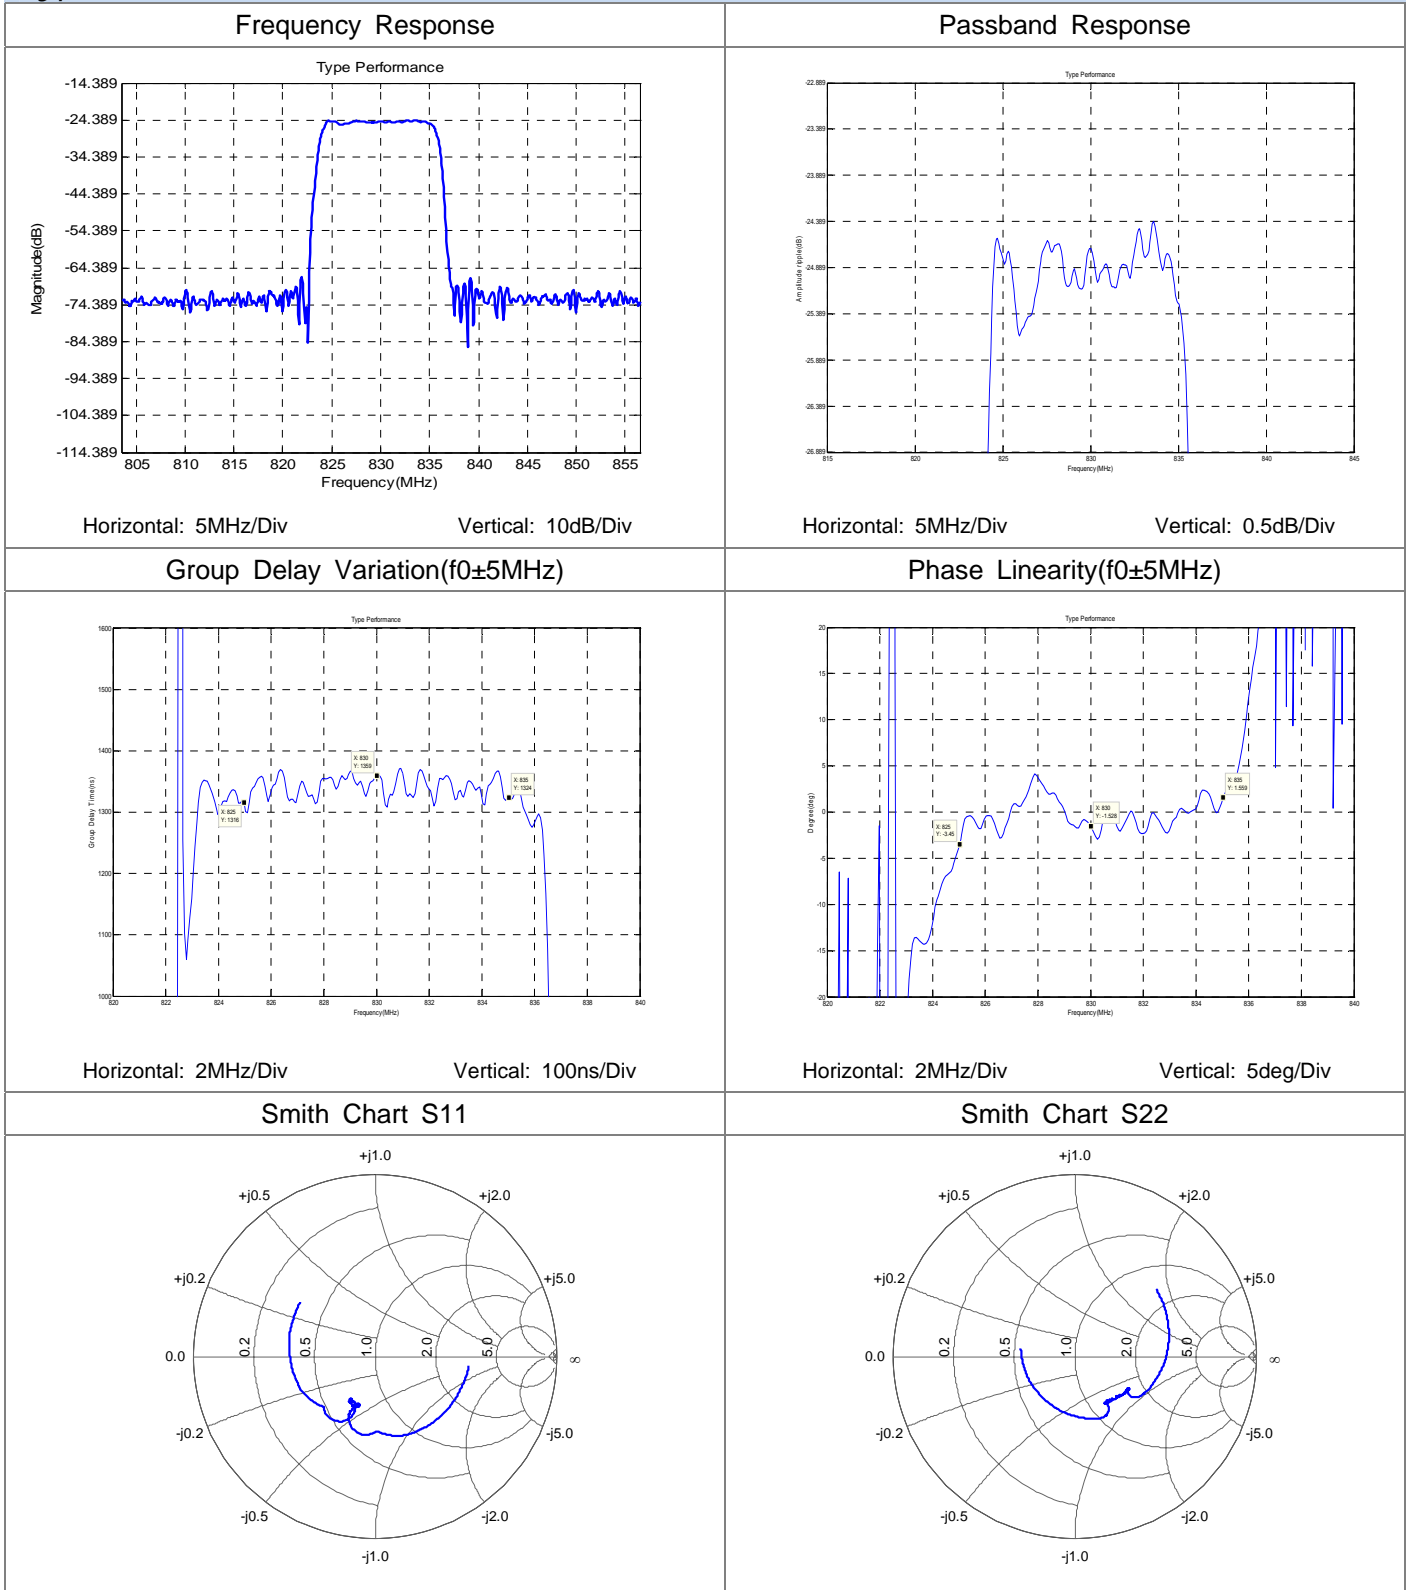

SIPAT Co., Ltd.
(CETC No.26 Research Institute)
#14 Nanping Huayuan Road,
Chongqing, China, 400060

Part Number	LBS83004	
Rev. Date	2010-11-12	
Ver.	1.0	Page 3/3