


SSI-LXH387 SERIES T-5mm FLAT TOP FRESNEL LENS INDICATORS

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy Panel Installation • Attractive Lens Finish • Choice of Colors • Blinking Type Option	• Panel Mount Indicator • Fault Indicator • Instrument Panel	• Holder: Black Nylon • Termination: 0.5mm □ Leads • Insulated Leads Optional • Installation: 5/16" Panel Hole

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSI-LXH387ID	RED	635	10-25	2.1	10	20 SSL-LX433XX
SSI-LXH387SRD	RED	660	10-25	1.7	60	20 SSL-LX433XX
SSI-LXH387GD	GREEN	565	10-25	2.1	10	20 SSL-LX433XX
SSI-LXH387YD	YELLOW	585	10-25	2.1	10	20 SSL-LX433XX
BI-COLOR OPTION						
SSI-LXH387HGW	RED/GREEN	695/565	10-25	2.1	5/5	20 SSL-LX433HGW
BLINKING OPTION						
SSI-LXH387BID	RED	635	10-20	3-15V	8	9V SSL-LX433XX

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

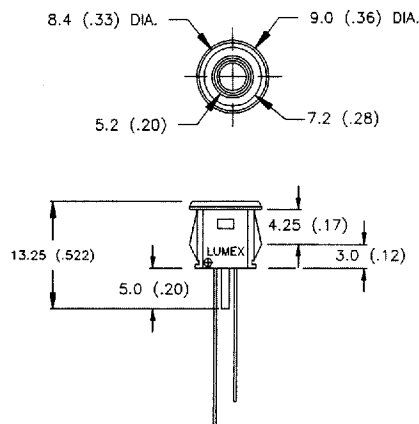


SSI-LXH387-4 SERIES T-5mm ROUND TOP LENS INDICATORS

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy Panel Installation • Attractive Lens Finish • Choice of Colors • Blinking Type Option	• Panel Mount Indicator • Fault Indicator • Instrument Panels	• Holder: Black Nylon • Termination: 0.5mm □ Leads • Insulated Leads Optional • Installation: 5/16" Panel Hole

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSI-LXH387ID-4	RED	635	10-25	2.1	10	20 SSL-LX4073XX
SSI-LXH387SRD-4	RED	660	10-25	1.7	60	20 SSL-LX4073XX
SSI-LXH387GD-4	GREEN	565	10-25	2.1	10	20 SSL-LX4073XX
SSI-LXH387YD-4	YELLOW	585	10-25	2.1	10	20 SSL-LX4073XX
BI-COLOR OPTION						
SSI-LXH387HGW-4	RED/GREEN	695/565	10-25	2.1	5/5	20 SSL-LX4073HGW
BLINKING OPTION						
SSI-LXH387BID-4	RED	635	10-20	3-15V	8	9V SSL-LX4073BID

See pages 8 -14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

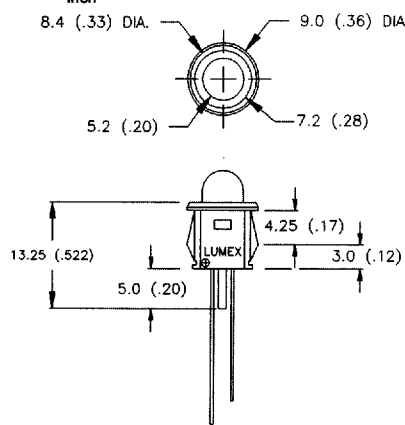

SSI-LXH9 SERIES T-5mm REAR of PANEL INSTALLATION LED IND.

FEATURES	APPLICATIONS	MATERIAL SPECIFICATIONS
• Easy Panel Installation • Rear Panel Installation • Choice of Colors • Lead Lengths 6" Standard	• Panel Indicators • Status Indicators • Instrument Indicators • Annunciators	• Holder: Black Rubber • Termination: 6" Insulated Leads • Installation: .275" Panel Hole

LUMEX PART NBR	EMITTED COLOR	PEAK(nm)	OPERATING CURRENT (mA)	OPERATING TYP Volts (V)	BRIGHTNESS TYP (mCD) @ mA	LED SERIES USED
SSI-LXH9ID-150	RED	635	10-25	2.1	15	20 SSL-LX5093XX
SSI-LXH9SRD-150	RED	660	10-25	1.7	70	20 SSL-LX5093XX
SSI-LXH9ID-150	GREEN	565	10-25	2.1	15	20 SSL-LX5093XX
SSI-LXH9YD-150	YELLOW	585	10-25	2.1	15	20 SSL-LX5093XX
BI-COLOR OPTION						
SSI-LXH9HGW-150	RED/GREEN	695/565	10-25	2.1	8/8	20 SSL-LX5093XX
FIXED VOLTAGE OPTIONS						
SSI-LXH9ID-5V-150	RED	635	20 max.	5.0	8	5V SSL-LX5093XX5V
SSI-LXH9GD-5V-150	GREEN	565	20 max.	5.0	8	5V SSL-LX5093XX5V
SSI-LXH9YD-5V-150	YELLOW	585	20 max.	5.0	8	5V SSL-LX5093XX5V

See pages 8-14 for Max. operating limits and operating curves

DIMENSIONS (mm) ±.2mm

