



559 - 283/295/301

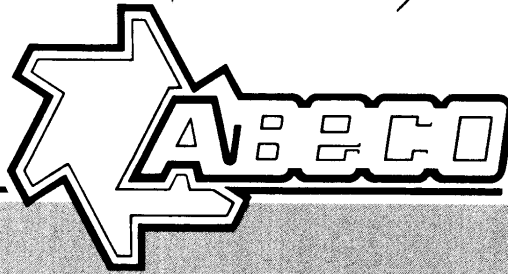

COAX - I

CATALOGUE NO. 070

**DEDICATED CO-AXIAL STRIPPER FOR ALL ROUND
CABLES FROM 3.0 TO 9.0 MM OD.**

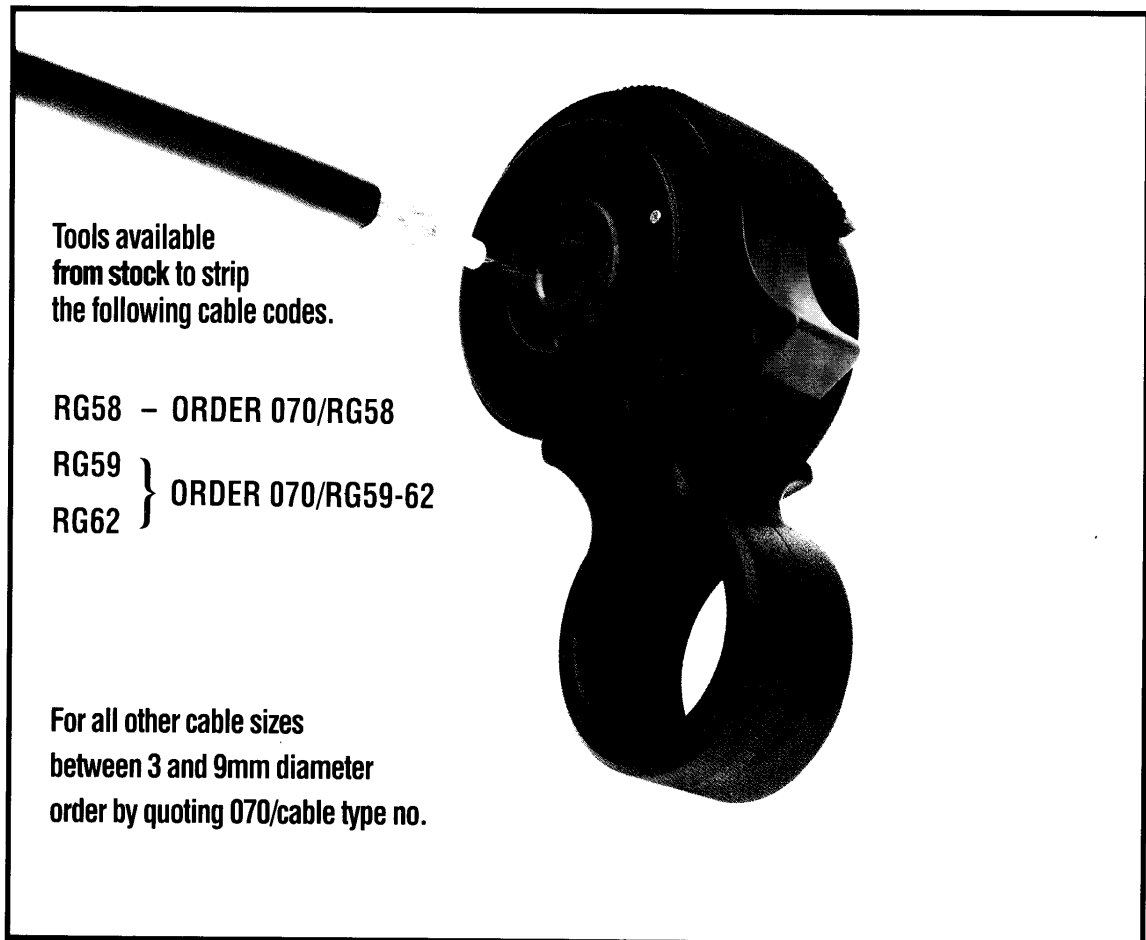

Tools available
from stock to strip
the following cable codes.

RG58 - ORDER 070/RG58

RG59 } ORDER 070/RG59-62
RG62 }

For all other cable sizes
between 3 and 9mm diameter
order by quoting 070/cable type no.

PATENTED


Variable multiple cuts in one operation.
Fast adjustment to distances between cuts.
Fast exchange of blades.

FAO: CLR


STRIPPING




Depress operating button to open.

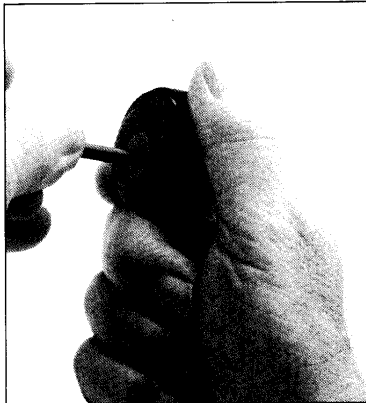


Insert cable in the indicated direction and close the blade carrier.

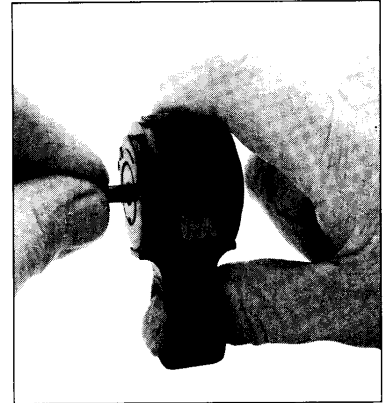


Depress carrier one ratchet 'click' and rotate 2/3 times.

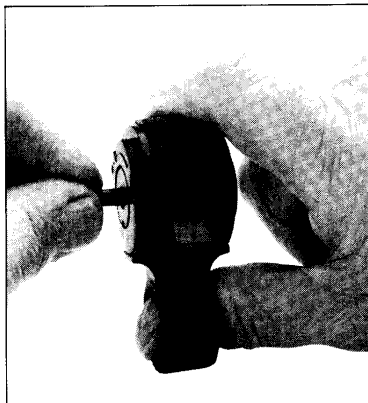

Repeat 3, to the last ratchet 'click'.

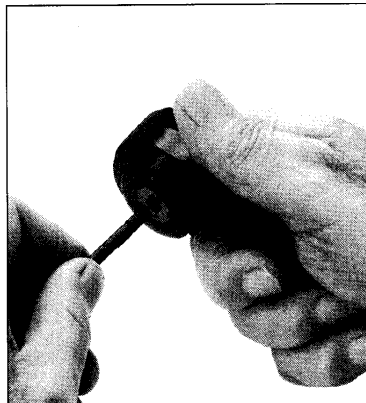

Depress operating button to open and pull out the cable.

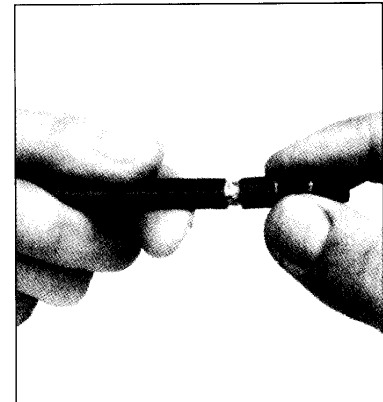

Remove cuts by hand.

Result is a clean and accurate cut through all types of braiding and insulations, which is reproducible and achieved in seconds, to dimensions as illustrated.

Should a change of dimensions between cuts be required, a simple loosening of the blade retaining screw and change of distance blocks (which are dimensionally marked), will adjust the distances between cuts to required dimensions.

The same procedure applies when an exchange of blades is required.


Set of distance blocks: Catalogue No: 07105

Set of spare blades: Catalogue No: 0701


SPECIFICATIONS

Weight: 72gm³ (2.5 oz)

Dimensions: 35 x 42 x 73mm (1³/₈" x 1⁵/₈" x 2⁷/₈")

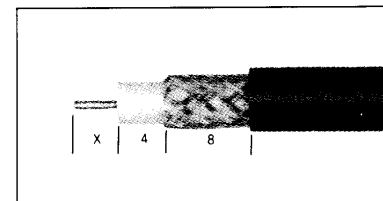

THIS STRIPPER IS THE ULTIMATE ANSWER TO THE NEEDS OF FIELD, FACTORY AND RESEARCH PERSONNEL WHERE EXACT CABLE TERMINATION IS NECESSARY



AB ENGINEERING COMPANY
HAND TOOL DIVISION
BUILDING 56, THE PENNETT ESTATE, KINGSWINFORD,
WEST MIDLANDS. DY6 7PP ENGLAND