


Fast IGBT

The Fast IGBT is a new generation of high voltage power IGBTs. Using Non-Punch Through Technology the Fast IGBT offers superior ruggedness, fast switching speed and low Collector-Emitter On voltage.

- Low Forward Voltage Drop
- Ultra Low Leakage Current
- Low Tail Current
- RBSOA and SCSOA Rated
- High Freq. Switching to 20KHz

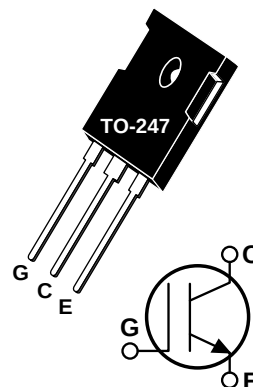

MAXIMUM RATINGS (IGBT)

All Ratings: $T_C = 25^\circ\text{C}$ unless otherwise specified.

Symbol	Parameter	APT33GF120BR	UNIT
V_{CES}	Collector-Emitter Voltage	1200	Volts
V_{CGR}	Collector-Gate Voltage ($R_{GE} = 20K\Omega$)	1200	
V_{GE}	Gate Emitter Voltage	± 20	
I_{C1}	Continuous Collector Current @ $T_C = 25^\circ\text{C}$	52	Amps
I_{C2}	Continuous Collector Current @ $T_C = 105^\circ\text{C}$	33	
I_{CM}	Pulsed Collector Current ^① @ $T_C = 25^\circ\text{C}$	104	
I_{LM}	RBSOA Clamped Inductive Load Current @ $R_g = 11\Omega$ $T_C = 125^\circ\text{C}$	66	
E_{AS}	Single Pule Avalanche Energy ^②	65	mJ
P_D	Total Power Dissipation	297	Watts
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to 150	$^\circ\text{C}$
T_L	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS (IGBT)

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	UNIT
BV_{CES}	Collector-Emitter Breakdown Voltage ($V_{GE} = 0V, I_C = 0.5mA$)	1200			Volts
$V_{GE(TH)}$	Gate Threshold Voltage ($V_{CE} = V_{GE}, I_C = 700\mu A, T_j = 25^\circ\text{C}$)	4.5	5.5	6.5	
$V_{CE(ON)}$	Collector-Emitter On Voltage ($V_{GE} = 15V, I_C = 25A, T_j = 25^\circ\text{C}$)		2.7	3.2	
	Collector-Emitter On Voltage ($V_{GE} = 15V, I_C = 25A, T_j = 125^\circ\text{C}$)		3.3	3.9	
I_{CES}	Collector Cut-off Current ($V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 25^\circ\text{C}$)			0.5	mA
	Collector Cut-off Current ($V_{CE} = V_{CES}, V_{GE} = 0V, T_j = 125^\circ\text{C}$)			5.0	
I_{GES}	Gate-Emitter Leakage Current ($V_{GE} = \pm 20V, V_{CE} = 0V$)			± 100	nA



CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - <http://www.advancedpower.com>

DYNAMIC CHARACTERISTICS (IGBT)

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{ies}	Input Capacitance	Capacitance $V_{GE} = 0V$ $V_{CE} = 25V$ $f = 1\text{ MHz}$		1855	2300	pF
C_{oes}	Output Capacitance			230	330	
C_{res}	Reverse Transfer Capacitance			110	170	
Q_g	Total Gate Charge ^③	Gate Charge $V_{GE} = 15V$ $V_{CC} = 0.5V_{CES}$ $I_C = I_{C2}$		170	260	nC
Q_{ge}	Gate-Emitter Charge			19	28	
Q_{gc}	Gate-Collector ("Miller") Charge			100	150	
$t_d(on)$	Turn-on Delay Time	Resistive Switching (25°C) $V_{GE} = 15V$ $V_{CC} = 0.8V_{CES}$ $I_C = I_{C2}$ $R_G = 10\Omega$		24	48	ns
t_r	Rise Time			85	170	
$t_d(off)$	Turn-off Delay Time			170	260	
t_f	Fall Time			125	312	
$t_d(on)$	Turn-on Delay Time	Inductive Switching (150°C) $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +150^\circ C$		25	50	ns
t_r	Rise Time			60	120	
$t_d(off)$	Turn-off Delay Time			210	320	
t_f	Fall Time			74	150	
E_{on}	Turn-on Switching Energy			2.8	6	mJ
E_{off}	Turn-off Switching Energy			2.8	6	
E_{ts}	Total Switching Losses			5.6	10	
$t_d(on)$	Turn-on Delay Time	Inductive Switching (25°C) $V_{CLAMP(Peak)} = 0.66V_{CES}$ $V_{GE} = 15V$ $I_C = I_{C2}$ $R_G = 10\Omega$ $T_J = +25^\circ C$		27	60	ns
t_r	Rise Time			65	130	
$t_d(off)$	Turn-off Delay Time			190	290	
t_f	Fall Time			70	140	
E_{ts}	Total Switching Losses			5.2	10	mJ
g_{fe}	Forward Transconductance	$V_{CE} = 20V, I_C = 25A$	8.5	20		S

THERMAL AND MECHANICAL CHARACTERISTICS (IGBT and FRED)








Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case			0.42	$^\circ C/W$
$R_{\theta JA}$	Junction to Ambient			40	
W_T	Package Weight		0.22		oz
			5.90		gm

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② $I_C = I_{C2}$, $V_{CC} = 50V$, $R_{GE} = 25\Omega$, $L = 120\mu H$, $T_J = 25^\circ C$

③ See MIL-STD-750 Method 3471

APT Reserves the right to change, without notice, the specifications and information contained herein.

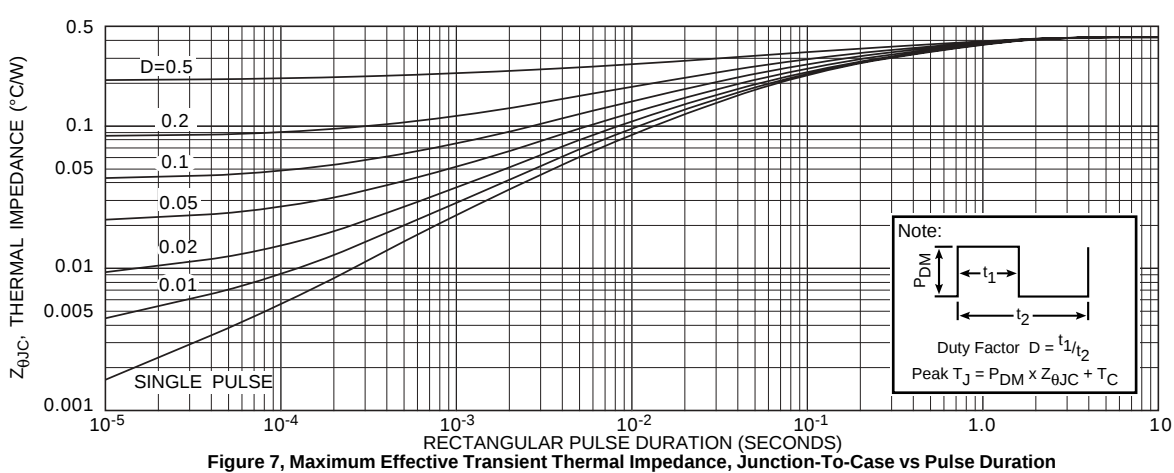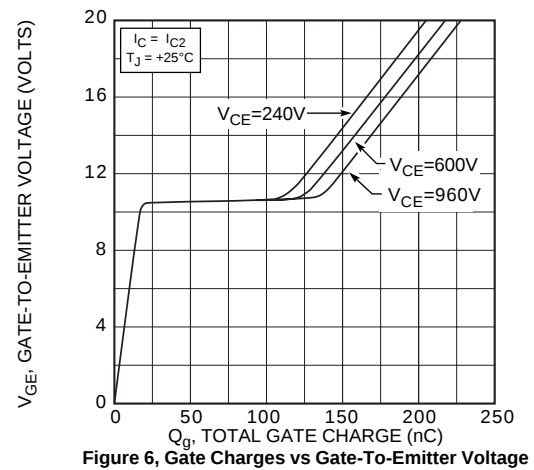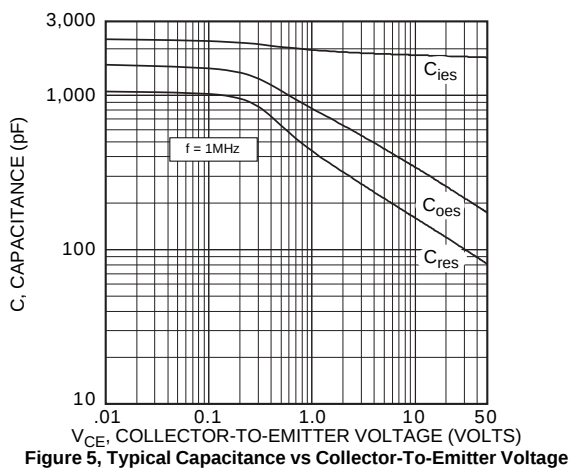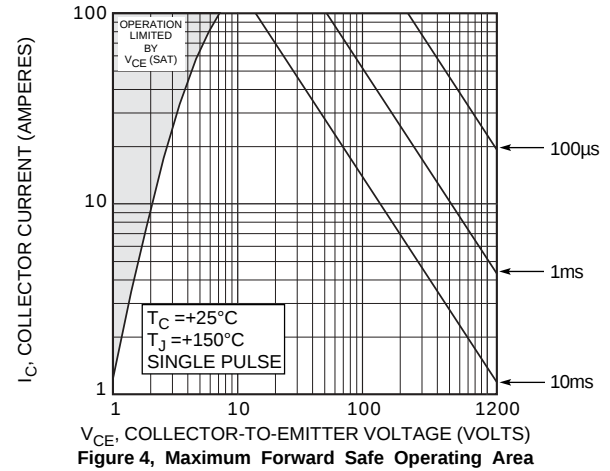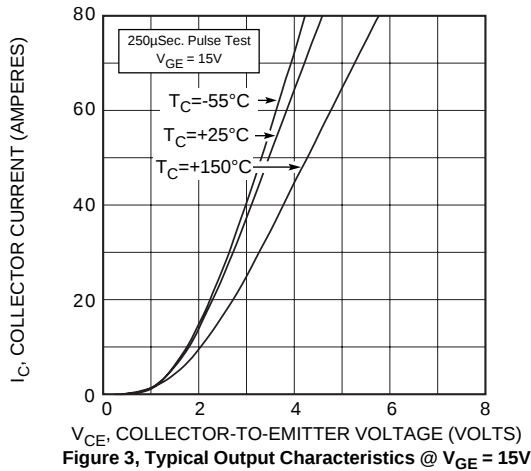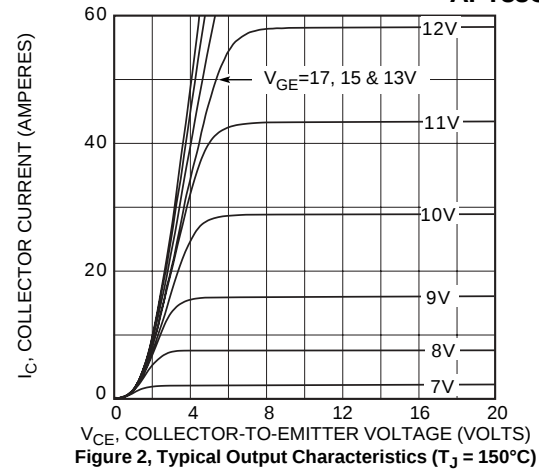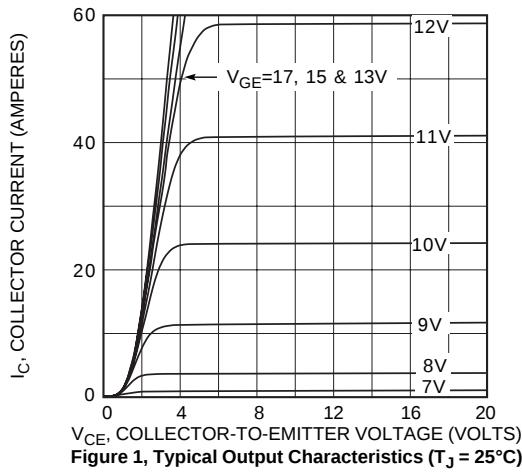

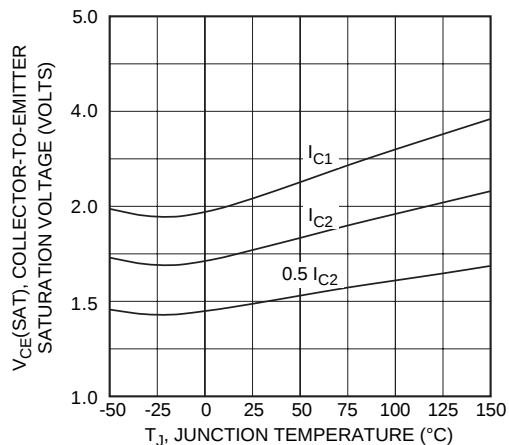


Figure 8, Typical $V_{CE(SAT)}$ Voltage vs Junction Temperature

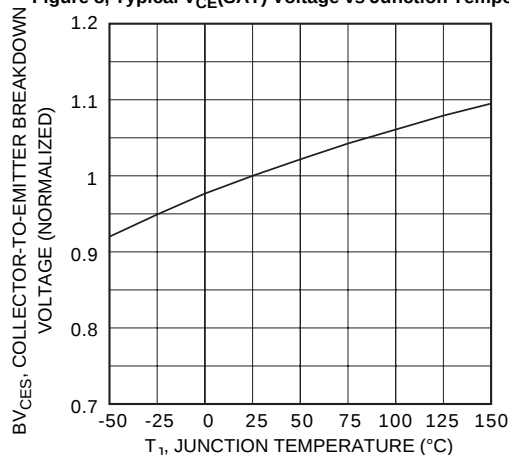


Figure 10, Breakdown Voltage vs Junction Temperature

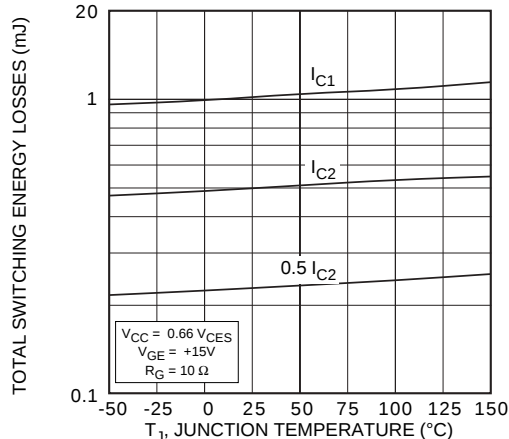


Figure 12, Typical Switching Energy Losses vs. Junction Temperature

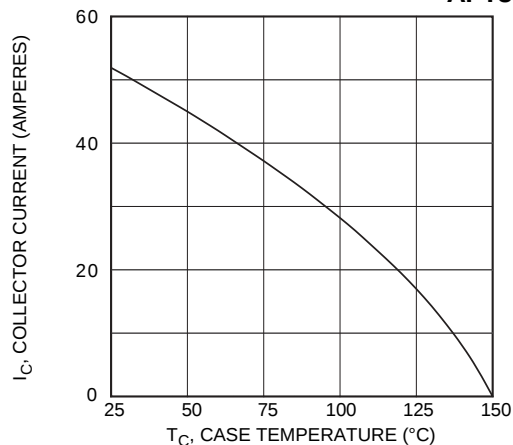


Figure 9, Maximum Collector Current vs Case Temperature

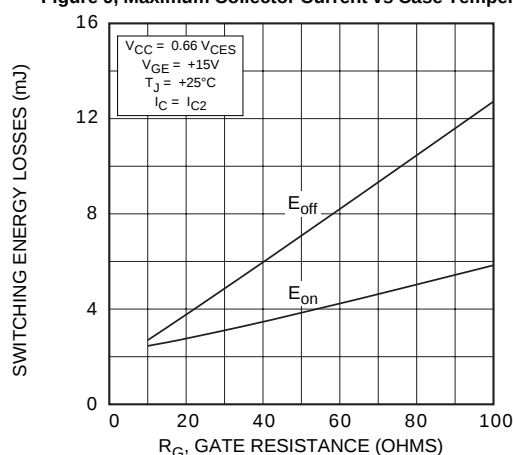


Figure 11, Typical Switching Energy Losses vs Gate Resistance

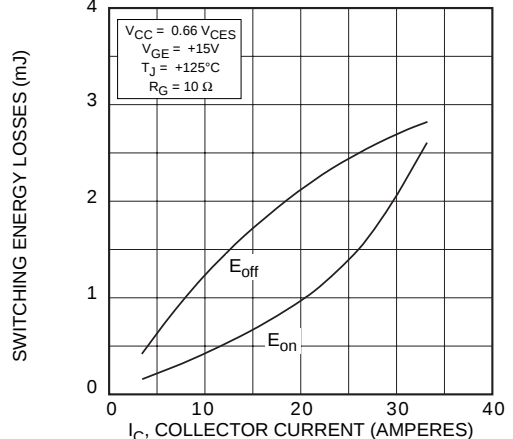


Figure 13, Typical Switching Energy Losses vs Collector Current

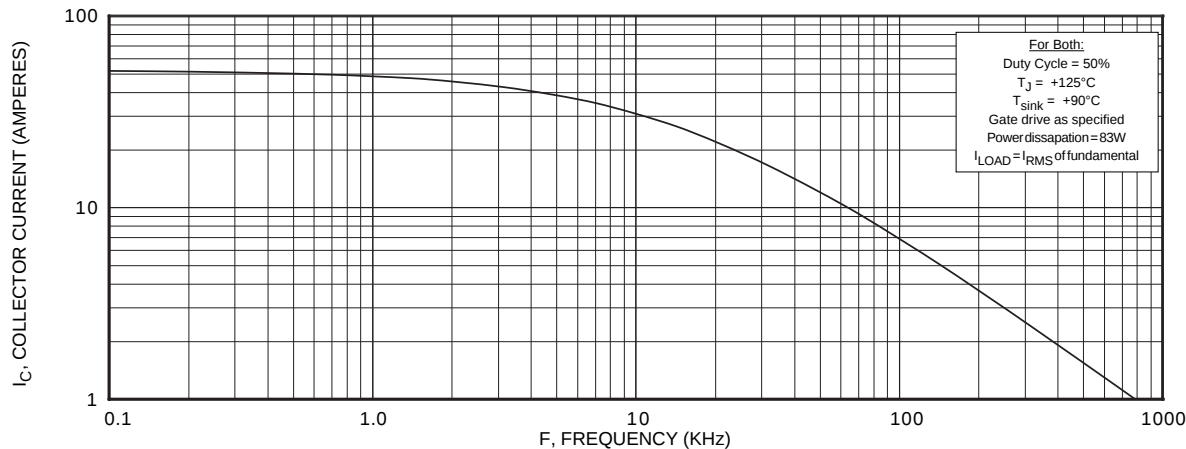


Figure 14, Typical Load Current vs Frequency

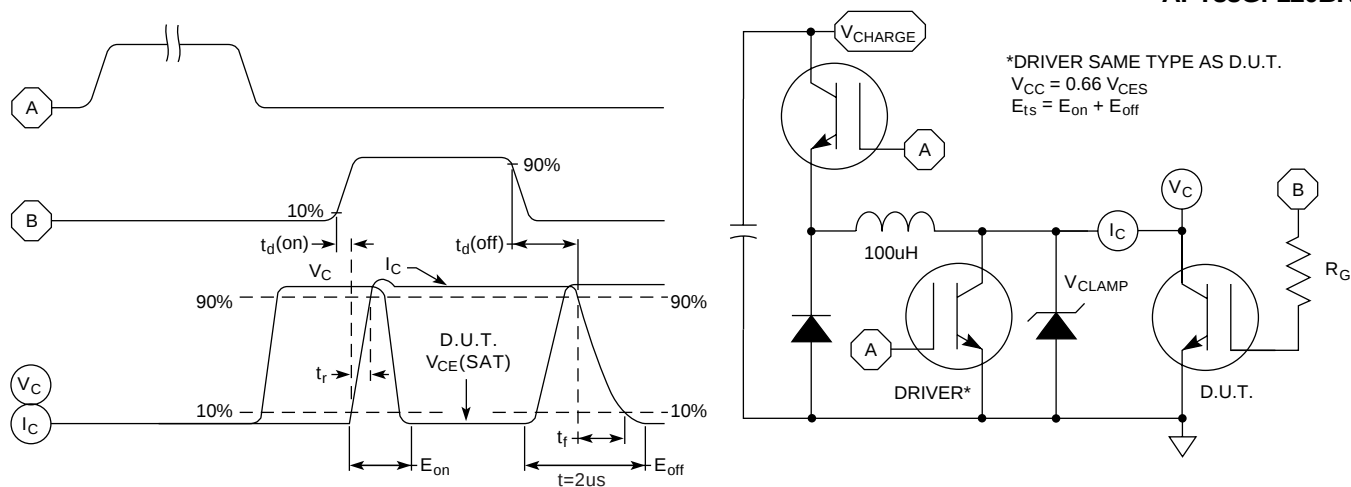


Figure 15, Switching Loss Test Circuit and Waveforms

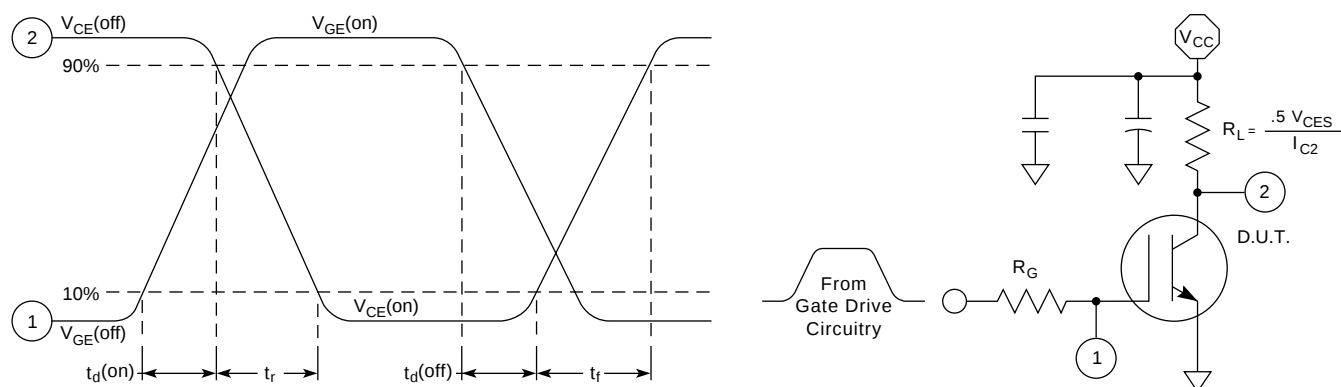


Figure 16, Resistive Switching Time Test Circuit and Waveforms

T0-247 Package Outline

