

2SB1473

Silicon PNP epitaxial planer type

For low-frequency output amplification
Complementary to 2SD2225

Features

- High collector to emitter voltage V_{CEO} .
- Satisfactory linearity of forward current transfer ratio h_{FE} .
- High transition frequency f_T .
- Allowing supply with the radial taping.

Absolute Maximum Ratings ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	-120	V
Collector to emitter voltage	V_{CEO}	-120	V
Emitter to base voltage	V_{EBO}	-5	V
Peak collector current	I_{CP}	-1	A
Collector current	I_C	-0.5	A
Collector power dissipation	P_C^*	1	W
Junction temperature	T_j	150	$^\circ\text{C}$
Storage temperature	T_{stg}	-55 ~ +150	$^\circ\text{C}$

* Printed circuit board: Copper foil area of 1cm^2 or more, and the board thickness of 1.7mm for the collector portion


Electrical Characteristics ($T_a=25^\circ\text{C}$)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector to emitter voltage	V_{CEO}	$I_C = -0.1\text{mA}$, $I_B = 0$	-120			V
Emitter to base voltage	V_{EBO}	$I_E = -10\mu\text{A}$, $I_C = 0$	-5			V
Forward current transfer ratio	h_{FE1}^{*1}	$V_{CE} = -10\text{V}$, $I_C = -150\text{mA}$	90		330	
	h_{FE2}	$V_{CE} = -5\text{V}$, $I_C = -500\text{mA}^{*2}$	50			
Collector to emitter saturation voltage	$V_{CE(sat)}$	$I_C = -300\text{mA}$, $I_B = -30\text{mA}^{*2}$			-1.0	V
Base to emitter saturation voltage	$V_{BE(sat)}$	$I_C = -300\text{mA}$, $I_B = -30\text{mA}^{*2}$			-1.2	V
Transition frequency	f_T	$V_{CB} = -10\text{V}$, $I_E = 50\text{mA}$, $f = 200\text{MHz}$		250		MHz
Collector output capacitance	C_{ob}	$V_{CB} = -10\text{V}$, $I_E = 0$, $f = 1\text{MHz}$			30	pF


^{*2} Pulse measurement

^{*1} h_{FE1} Rank classification


Rank	Q	R	S
h_{FE1}	90 ~ 155	130 ~ 220	185 ~ 330

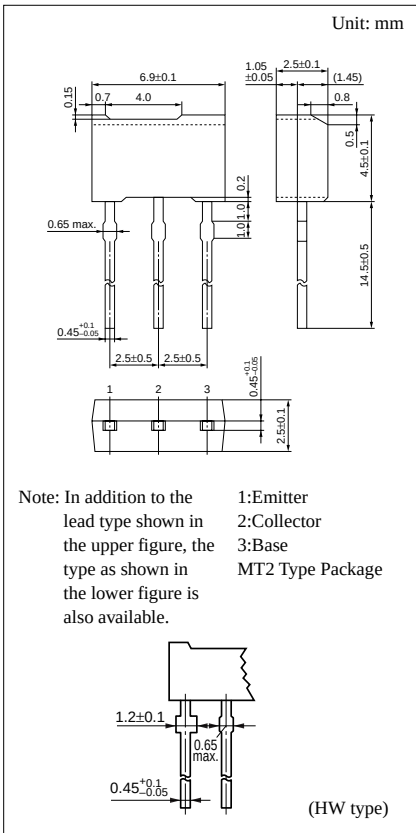


$P_C — T_a$

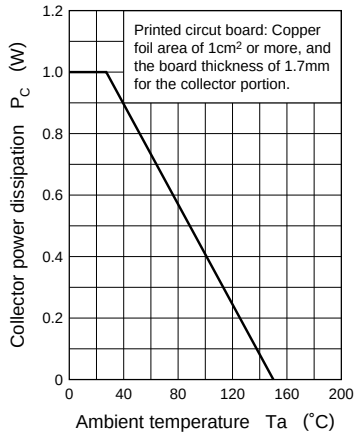


$I_C — V_{CE}$

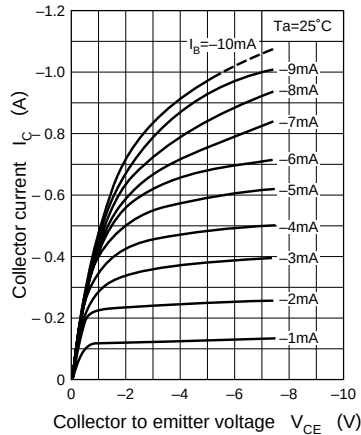


$h_{FE} — I_C$

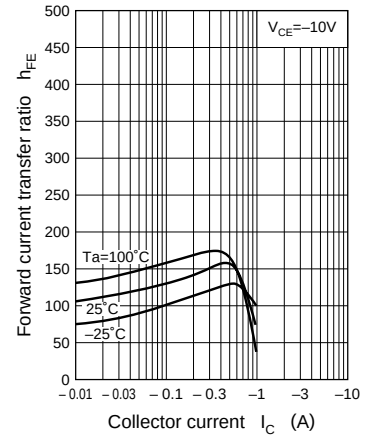


$V_{BE(\text{sat})} — I_C$

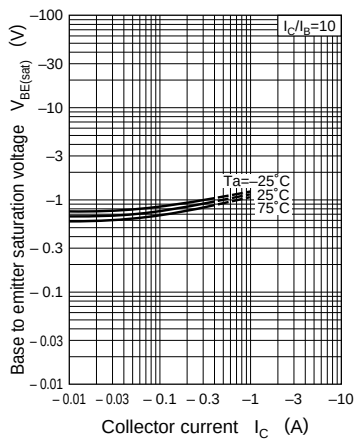

$V_{CE(\text{sat})} — I_C$

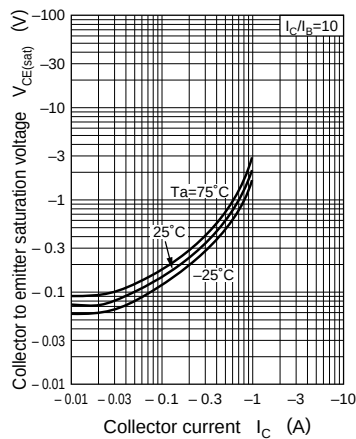

$f_T — I_E$

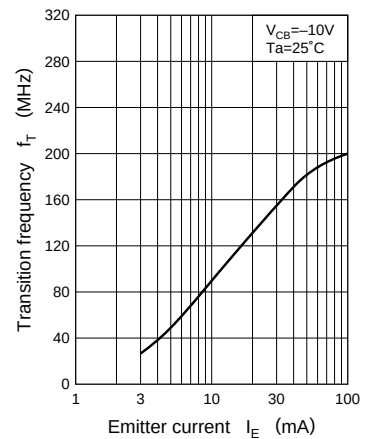

$C_{ob} — V_{CB}$

