

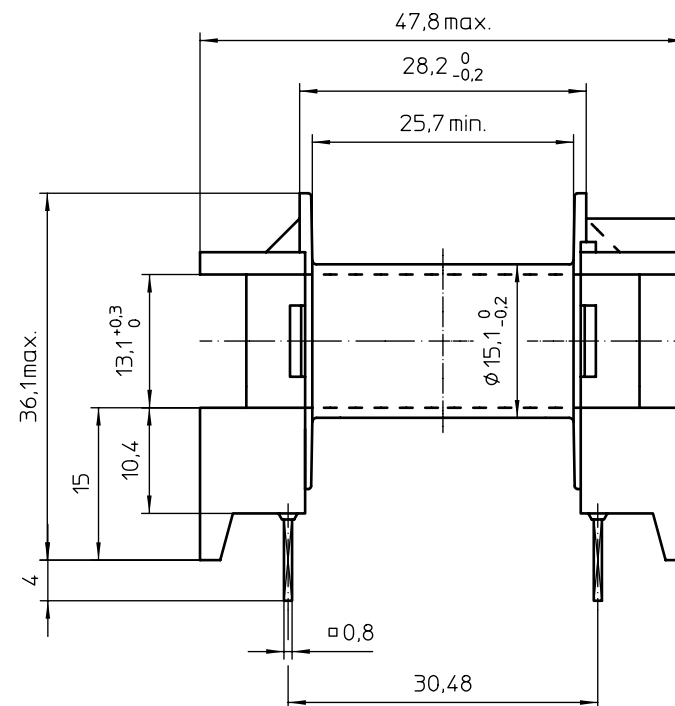


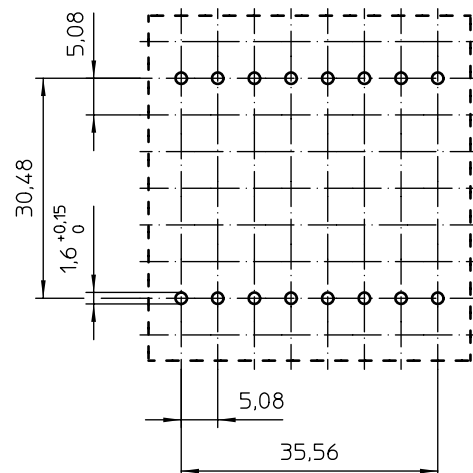

HOLE PATTERN:

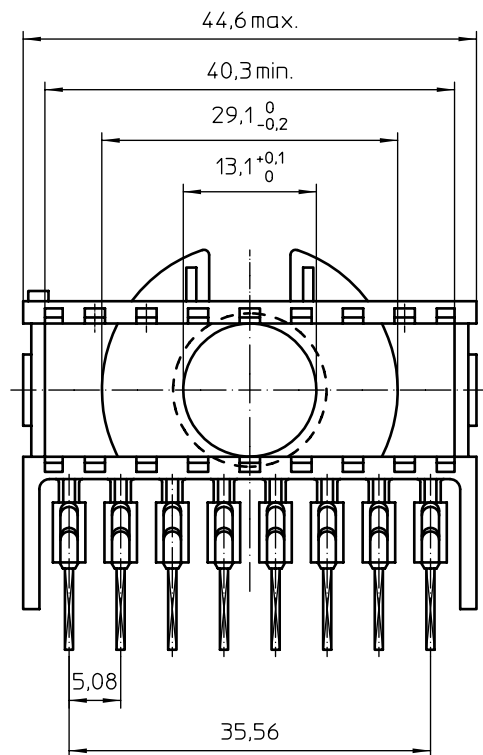

Coil former material: Valox 420SE0 (PBT), glass-reinforced.
 UL file number: E45329(R) - UL94V-0.
 Pin material: CuSn - Ni flash, SnPb plated.
 Max. operating temp.: acc. to IEC 85 class F, 155°C.
 Resistance to soldering heat: acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C - 3,5sec.
 Solderability: acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
 Min. winding area: 177 mm².
 Mean length of turn: 69 mm.

CLASSNO.			96-02-06
			98-01-20
NAME NAAM	CPH-ETD39-1S-16P		4322 021 01651
DATE DAT.	96-02-06	1001	112 - 001 069
CHECK CONTR.			
PROPERTY EIGENDOM VAN	© FERROXCUBE 2000		
MPA			A3