


730-324




Scanning distance

100 to 1500 mm,
adjustable

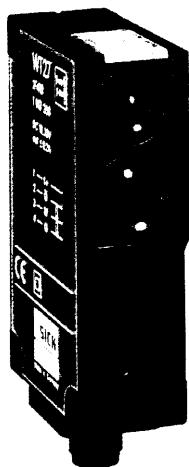


Features:

- Scanning distance freely adjustable
- Background suppression
- Advance failure warning and alignment aid by means of flashing LED signal strength indicator
- No false triggering on power-up
- Time delays, selectable (t_1 , t_2 , $t_1 + t_2$) with P/N and R variants
- Immune to ambient light sources (HF lamps, warning flash lights)
- Reliable functioning even when devices installed opposite each other
- Permissible ambient operating temperature -40°C to $+60^{\circ}\text{C}$
- Glass-fiber-reinforced plastic housing
- CE / UL / SF

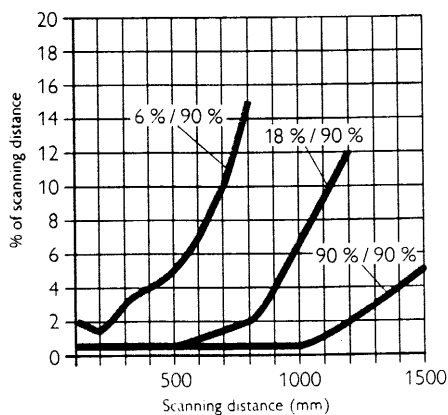


WT 27-2

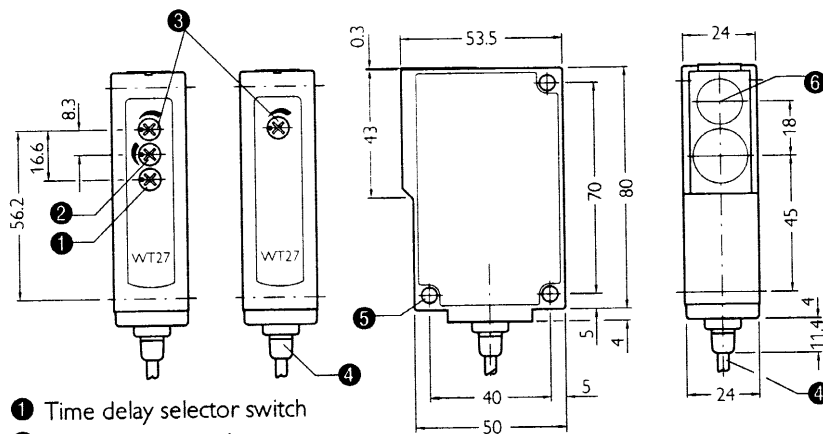


- 1 Time delay selector switch
- 2 Time delay control
- 3 Sensitivity control
- 4 Connection cable
- 5 Mounting hole
- 6 Middle of optical axis
- 7 dark-switching
- 8 light-switching


-F 411






-N / -P / -R 610



-F / -S 710




-F 410, 411, 440




Connection Diagram


WT 27-2 -F 112




-F 410 -F 411 -F 440




-N / -P 610 -F 710




-N




-P / -F




-S 112



-R 610



-S 710



red	grn	ora	blu	blk	brn
red	green	orange	blue	black	brown