



Belegung / layout : RASTERBELEGUNG

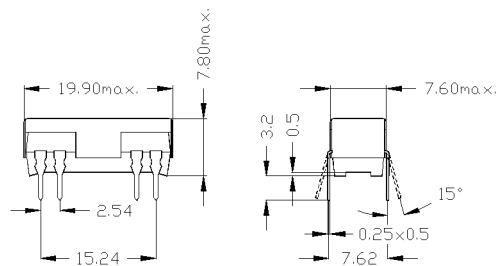

Aufdruck / marking :

 MEDER electronic  
 DIP12-1B72-19M

 Raster / pitch RASTERMAß  
 Ansicht von oben / top view

 dimensions / Abmessungen (mm)  
 tolerances acc. to DIN ISO 2768-m

| Coil Data at 20 °C | Conditions                                                       | Min | Typ   | Max   | Unit |
|--------------------|------------------------------------------------------------------|-----|-------|-------|------|
| Coil resistance    |                                                                  | 900 | 1.000 | 1.100 | Ohm  |
| Coil voltage       |                                                                  |     | 12    |       | VDC  |
| Rated power        |                                                                  |     | 144   |       | mW   |
| Coil current       |                                                                  |     | 12    |       | mA   |
| Thermal resistance | max. Relay temperature<br>= operating temperature + self heating |     | 108   |       | K/W  |
| Inductance         |                                                                  |     | 43    |       | mH   |
| Pull-In voltage    |                                                                  |     |       | 8,4   | VDC  |
| Drop-Out voltage   |                                                                  | 1,8 |       |       | VDC  |

| Contact data 66/3           | Conditions                                                           | Min | Typ | Max | Unit  |
|-----------------------------|----------------------------------------------------------------------|-----|-----|-----|-------|
| Contact rating              | Any DC combination of V & A<br>not to exceed their individual max.'s |     |     | 10  | W     |
| Switching voltage           | DC or Peak AC                                                        |     |     | 200 | V     |
| Switching current           | DC or Peak AC                                                        |     |     | 0,5 | A     |
| Carry current               | DC or Peak AC                                                        |     |     | 1   | A     |
| Contact resistance static   | Measured with 40% overdrive<br>Start Value                           |     |     | 150 | mOhm  |
| Insulation resistance       | RH <45 %, 100 V test voltage                                         | 1,5 |     |     | TOhm  |
| Breakdown voltage (> 20 AT) | according to IEC 255-5                                               | 0,5 |     |     | kV DC |
| Operate time incl. bounce   | measured with 40% overdrive                                          |     |     | 0,5 | ms    |
| Release time                | measured with no coil excitation                                     |     |     | 0,1 | ms    |
| Capacity                    | @ 10 kHz across open switch                                          |     | 0,2 |     | pF    |

| Special Product Data               | Conditions             | Min | Typ                       | Max | Unit  |
|------------------------------------|------------------------|-----|---------------------------|-----|-------|
| Number of contacts                 |                        |     | 1                         |     |       |
| Contact - form                     |                        |     | B - NC                    |     |       |
| Dielectric Strength Coil/Contact   | according to IEC 255-5 | 1,5 |                           |     | kV DC |
| Insulation resistance Coil/Contact | 40 °C, 95% R.H.        | 5   |                           |     | TOhm  |
| Capacity Coil/Contact              | @ 10 kHz               |     | 1,8                       |     | pF    |
| Case colour                        |                        |     | black                     |     |       |
| Housing material                   |                        |     | mineral filled epoxy      |     |       |
| Connection pins                    |                        |     | FeNi-alloy tinned         |     |       |
| Magnetic Shield                    |                        |     | yes                       |     |       |
| Reach / RoHS conformity            |                        |     | yes                       |     |       |
| Approval                           |                        |     | UL File No. NRNT2.E156887 |     |       |
| Approval                           |                        |     | UL File No. NRNT8.E156887 |     |       |
| Remark                             |                        |     | attention coil polarity   |     |       |



*Products for tomorrow...*

Europe: +49 / 7731 8399 0

| Email: info@meder.com

USA: +1 / 508 295 0771

| Email: salesusa@meder.com

Asia: +852 / 2955 1682

| Email: salesasia@meder.com

Item No.:

**3212010219**

Item:

**DIP12-1B72-19M**

| Environmental data    | Conditions                  | Min          | Typ | Max | Unit |
|-----------------------|-----------------------------|--------------|-----|-----|------|
| Shock                 | 1/2 sine wave duration 11ms |              |     | 50  | g    |
| Vibration             | from 10 - 2000 Hz           |              |     | 20  | g    |
| Operating temperature |                             | -20          |     | 70  | °C   |
| Storage temperature   |                             | -35          |     | 95  | °C   |
| Soldering temperature | wave soldering max. 5 sec.  |              |     | 260 | °C   |
| Washability           |                             | fully sealed |     |     |      |

| General data | Conditions | Min               | Typ | Max | Unit |
|--------------|------------|-------------------|-----|-----|------|
| Total weight |            |                   | 3   |     | g    |
| Packaging    |            | Tube per 25 piece |     |     |      |

Modifications in the sense of technical progress are reserved

Designed at: 22.04.04 Designed by: SCHELLHORN

Approval at: 21.08.09 Approval by: KOLBRICH

Last Change at: 22.04.04 Last Change by: SCHELLHORN

Approval at: Approval by:

Version: V1.0