


RoHS Compliant Product
A suffix of "-C" specifies halogen and lead-free

DESCRIPTION

These miniature surface mount MOSFETs utilize High Cell Density process. Low $R_{DS(on)}$ assures minimal power loss and conserves energy, making this device ideal for use in power management circuitry. Typical applications are power switch, power management in portable and battery-powered products such as computers, printers, PCMCIA cards, cellular and cordless telephones.

SC-59

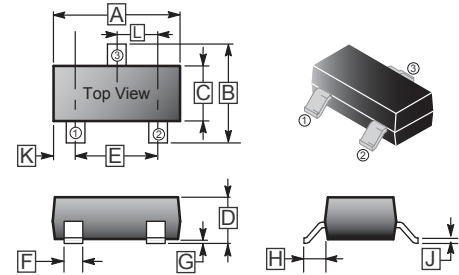

FEATURES

- Low $R_{DS(on)}$ provides higher efficiency and extends battery life.
- Low gate charge
- Fast switching
- Miniature SC-59 surface mount package saves board space.


PRODUCT SUMMARY

| SMG2398N | | |
|-------------|----------------------------|----------|
| $V_{DS}(V)$ | $R_{DS(on)}$ (m Ω) | $I_D(A)$ |
| 60 | 194@ $V_{GS}=10V$ | 2.2 |
| | 273@ $V_{GS}=4.5V$ | 1.8 |

| REF. | Millimeter | | REF. | Millimeter | |
|------|------------|------|------|------------|------|
| | Min. | Max. | | Min. | Max. |
| A | 2.70 | 3.10 | G | 0.10 | REF. |
| B | 2.25 | 3.00 | H | 0.40 | REF. |
| C | 1.30 | 1.70 | J | 0.10 | 0.20 |
| D | 1.00 | 1.40 | K | 0.45 | 0.55 |
| E | 1.70 | 2.30 | L | 0.85 | 1.15 |
| F | 0.35 | 0.50 | | | |

PACKAGE INFORMATION

| Package | MPQ | LeaderSize |
|---------|-----|------------|
| SC-59 | 3K | 7' inch |



ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ C$ UNLESS OTHERWISE NOTED)

| Parameter | Symbol | Ratings | Unit | |
|---|----------------|------------------------|------------|---|
| | | Maximum | | |
| Drain-Source Voltage | V_{DS} | 60 | V | |
| Gate-Source Voltage | V_{GS} | ± 20 | V | |
| Continuous Drain Current ¹ | I_D | $I_D @ T_A=25^\circ C$ | 2.2 | A |
| | | $I_D @ T_A=70^\circ C$ | 1.7 | A |
| Pulsed Drain Current ² | I_{DM} | ± 15 | A | |
| Continuous Source Current (Diode Conduction) ¹ | I_S | 1.7 | A | |
| Power Dissipation ¹ | P_D | $P_D @ T_A=25^\circ C$ | 1.3 | W |
| | | $P_D @ T_A=70^\circ C$ | 0.8 | W |
| Operating Junction and Storage Temperature Range | T_j, T_{stg} | -55 ~ 150 | $^\circ C$ | |

THERMAL RESISTANCE RATINGS

| Parameter | Symbol | Maximum | Unit |
|--|-----------------|----------------|------|
| Maximum Junction to Ambient ¹ | $R_{\theta JA}$ | $t \leq 5$ sec | 100 |
| | | Steady State | 166 |

Notes

- 1 Surface Mounted on 1" x 1" FR4 Board.
- 2 Pulse width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

| Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|---|--------------|------|------|-----------|---------------|--|
| Gate-Threshold Voltage | $V_{GS(th)}$ | 1.0 | - | - | V | $V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$ |
| Gate-Body Leakage | I_{GSS} | - | - | ± 100 | nA | $V_{DS}=0\text{V}$, $V_{GS}=\pm 20\text{V}$ |
| Zero Gate Voltage Drain Current | I_{DSS} | - | - | 1 | μA | $V_{DS}=48\text{V}$, $V_{GS}=0\text{V}$ |
| | | - | - | 50 | | $V_{DS}=48\text{V}$, $V_{GS}=0\text{V}$, $T_J=55^\circ\text{C}$ |
| On-State Drain Current ¹ | $I_{D(on)}$ | 10 | - | - | A | $V_{DS}=5\text{V}$, $V_{GS}=10\text{V}$ |
| Drain-Source On-Resistance ¹ | $R_{DS(ON)}$ | - | - | 194 | m Ω | $V_{GS}=10\text{V}$, $I_D=2.2\text{A}$ |
| | | - | - | 273 | | $V_{GS}=4.5\text{V}$, $I_D=1.8\text{A}$ |
| Forward Transconductance ¹ | g_{fs} | - | 8 | - | S | $V_{DS}=4.5\text{V}$, $I_D=2.2\text{A}$ |
| Diode Forward Voltage | V_{SD} | - | - | 1.2 | V | $I_S=1.7\text{A}$, $V_{GS}=0\text{V}$ |
| DYNAMIC ² | | | | | | |
| Total Gate Charge | Q_g | - | 4.0 | - | nC | $V_{DS}=30\text{V}$, $V_{GS}=5\text{V}$, $I_D=2.2\text{A}$ |
| Gate-Source Charge | Q_{gs} | - | 4.0 | - | | |
| Gate-Drain Charge | Q_{gd} | - | 2.0 | - | | |
| Turn-on Delay Time | $T_{d(on)}$ | - | 10 | - | nS | $V_{DD}=30\text{V}$, $V_{GEN}=10\text{V}$, $R_L=30\Omega$, $I_D=1\text{A}$ |
| Rise Time | T_r | - | 10 | - | | |
| Turn-off Delay Time | $T_{d(off)}$ | - | 20 | - | | |
| Fall Time | T_f | - | 10 | - | | |
| Source-Drain Reverse Recovery Time | T_{RR} | - | 50 | - | | |

Notes

- 1 Pulse test : $PW \leq 300\ \mu\text{s}$ duty cycle $\leq 2\%$.
- 2 Guaranteed by design, not subject to production testing.