




- ▼ Dynamic dv/dt Rating
- ▼ Repetitive Avalanche Rated
- ▼ Fast Switching
- ▼ Simple Drive Requirement




TO-220

BV_{DSS}	400V
$R_{DS(ON)}$	$1.0\ \Omega$
I_D	5.5A

Description

The Advanced Power MOSFETs from APEC provide the designer with the best combination of fast switching , ruggedized device design , low on-resistance and cost-effectiveness.

The TO-220 package is universally preferred for all commercial-industrial applications. The device is suited for switch mode power supplies ,DC-AC converters and high current high speed switching circuits.



Absolute Maximum Ratings

Symbol	Parameter	Rating	Units
V_{DS}	Drain-Source Voltage	400	V
V_{GS}	Gate-Source Voltage	± 30	V
$I_D@T_C=25^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	5.5	A
$I_D@T_C=100^\circ\text{C}$	Continuous Drain Current, V_{GS} @ 10V	3.5	A
I_{DM}	Pulsed Drain Current ¹	23	A
$P_D@T_C=25^\circ\text{C}$	Total Power Dissipation	74	W
	Linear Derating Factor	0.59	W/ $^\circ\text{C}$
E_{AS}	Single Pulse Avalanche Energy ²	260	mJ
I_{AR}	Avalanche Current	5.5	A
E_{AR}	Repetitive Avalanche Energy	7	mJ
T_{STG}	Storage Temperature Range	-55 to 150	$^\circ\text{C}$
T_J	Operating Junction Temperature Range	-55 to 150	$^\circ\text{C}$

Thermal Data

Symbol	Parameter	Value	Unit
Rthj-c	Thermal Resistance Junction-case Max.	1.7	$^\circ\text{C}/\text{W}$
Rthj-a	Thermal Resistance Junction-ambient Max.	62	$^\circ\text{C}/\text{W}$


Electrical Characteristics@T_j=25°C(unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250uA	400	-	-	V
ΔBV _{DSS} /ΔT _j	Breakdown Voltage Temperature Coefficient	Reference to 25°C, I _D =1mA	-	0.36	-	V/°C
R _{DS(ON)}	Static Drain-Source On-Resistance	V _{GS} =10V, I _D =2.75A	-	-	1	Ω
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250uA	2	-	4	V
g _{fs}	Forward Transconductance	V _{DS} =10V, I _D =2.75A	-	30	-	S
I _{DSS}	Drain-Source Leakage Current (T _j =25°C)	V _{DS} =400V, V _{GS} =0V	-	-	10	uA
	Drain-Source Leakage Current (T _j =150°C)	V _{DS} =320V, V _{GS} =0V	-	-	100	uA
I _{GSS}	Gate-Source Leakage	V _{GS} = ± 30V	-	-	±100	nA
Q _g	Total Gate Charge ³	I _D =5.5A	-	35	-	nC
Q _{gs}	Gate-Source Charge	V _{DS} =320V	-	3.7	-	nC
Q _{gd}	Gate-Drain ("Miller") Charge	V _{GS} =10V	-	20	-	nC
t _{d(on)}	Turn-on Delay Time ³	V _{DD} =200V	-	8	-	ns
t _r	Rise Time	I _D =5.5A	-	20	-	ns
t _{d(off)}	Turn-off Delay Time	R _G =10Ω, V _{GS} =10V	-	47	-	ns
t _f	Fall Time	R _D =36Ω	-	18	-	ns
C _{iss}	Input Capacitance	V _{GS} =0V	-	565	-	pF
C _{oss}	Output Capacitance	V _{DS} =25V	-	70	-	pF
C _{rss}	Reverse Transfer Capacitance	f=1.0MHz	-	38	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
I _S	Continuous Source Current (Body Diode)	V _D =V _G =0V , V _S =1.5V	-	-	5.5	A
I _{SM}	Pulsed Source Current (Body Diode) ¹		-	-	23	A
V _{SD}	Forward On Voltage ³	T _j =25°C, I _S =5.5A, V _{GS} =0V	-	-	1.5	V

Notes:

- 1.Pulse width limited by safe operating area.
- 2.Starting T_j=25°C , V_{DD}=50V , L=15mH , R_G=25Ω , I_{AS}=5.5A.
- 3.Pulse width ≤300us , duty cycle ≤2%.

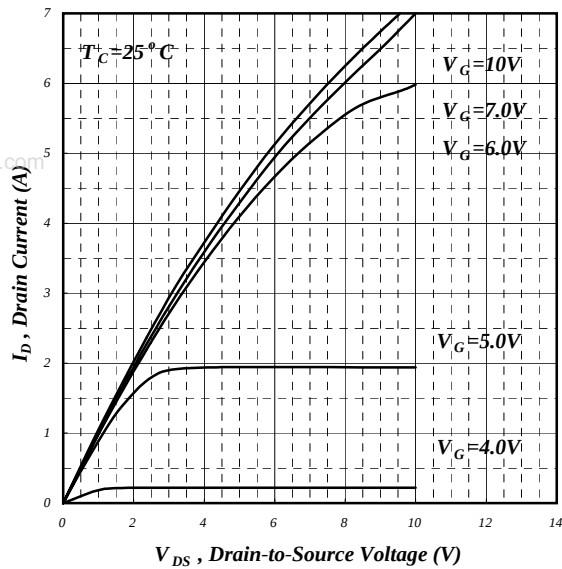


Fig 1. Typical Output Characteristics

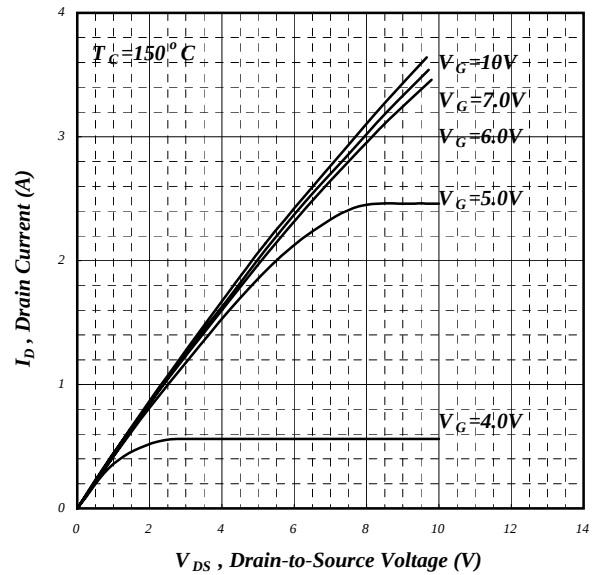


Fig 2. Typical Output Characteristics

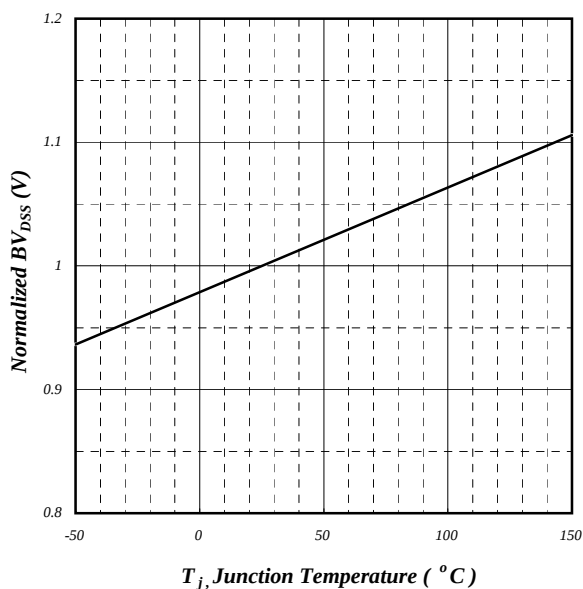


Fig 3. Normalized BV_{DSS} v.s. Junction Temperature

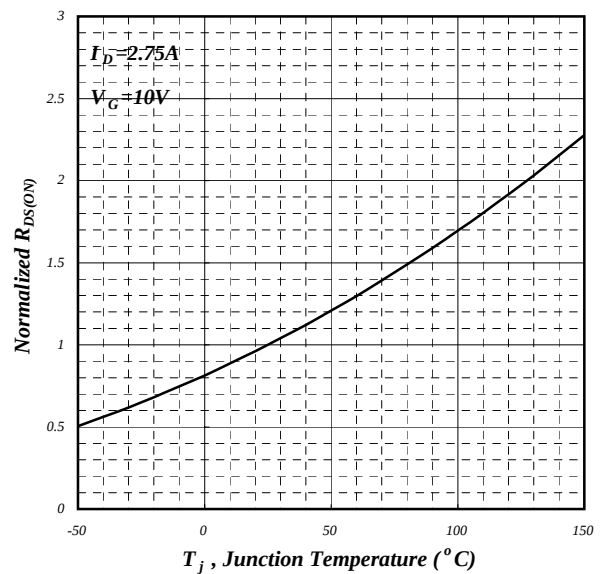


Fig 4. Normalized On-Resistance v.s. Junction Temperature

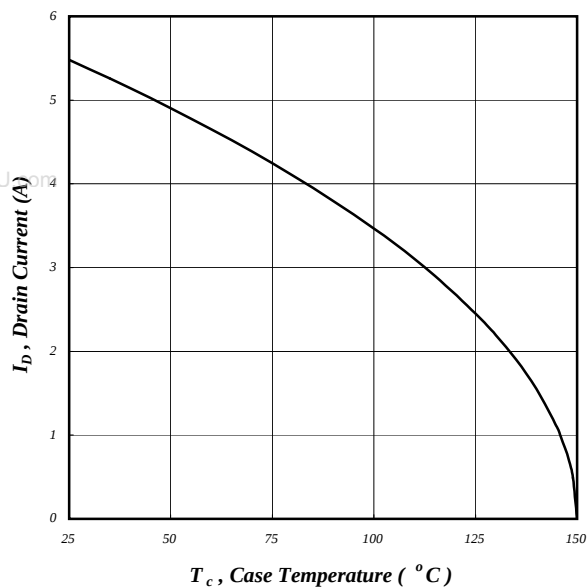


Fig 5. Maximum Drain Current v.s. Case Temperature

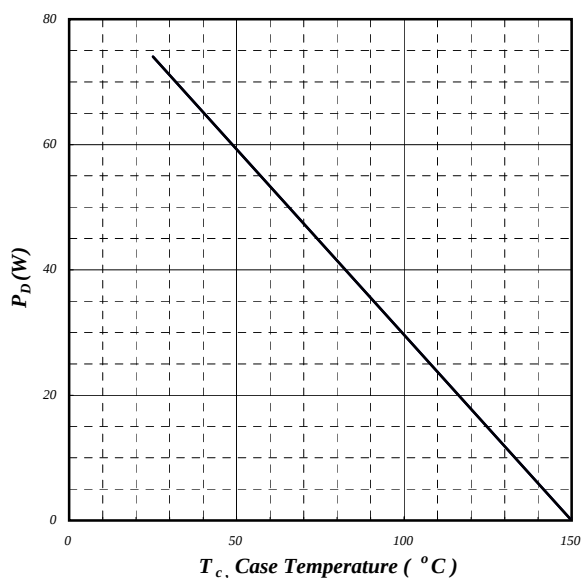


Fig 6. Typical Power Dissipation

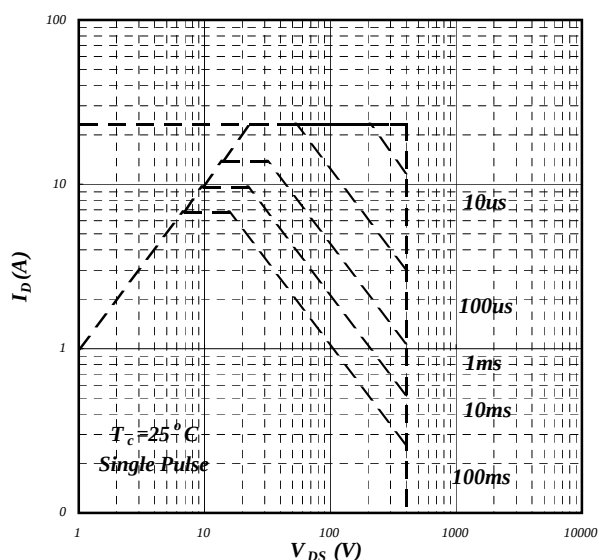


Fig 7. Maximum Safe Operating Area

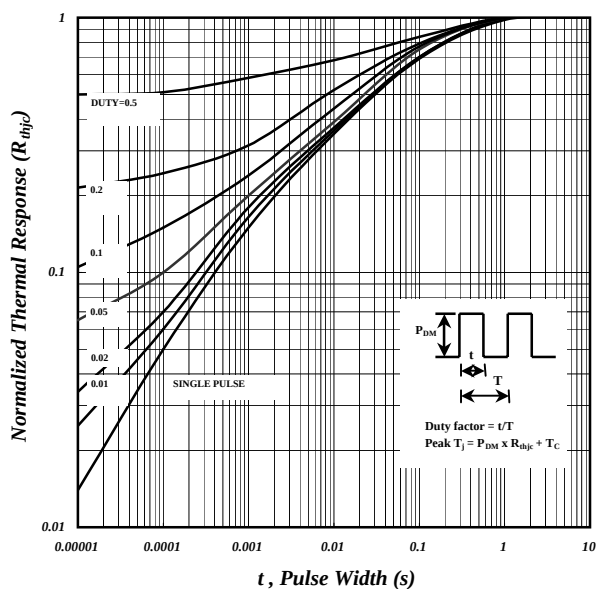
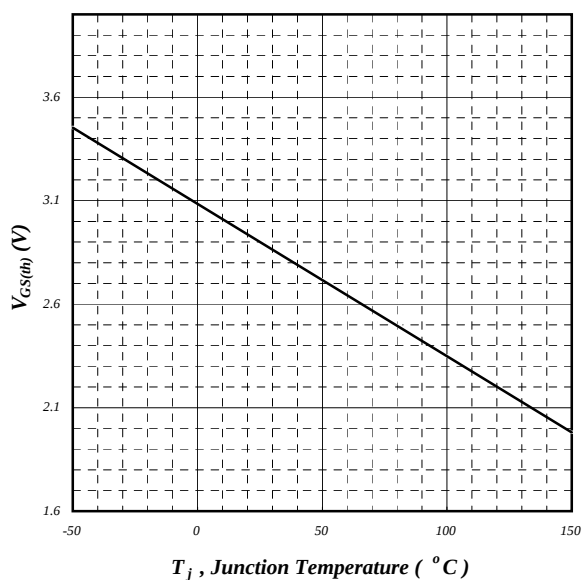
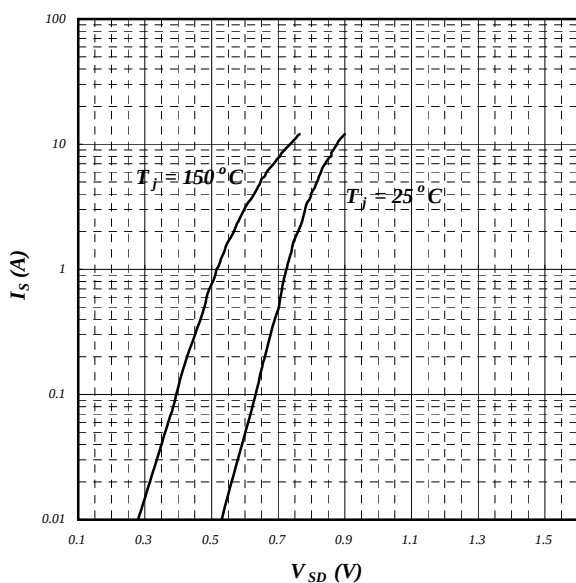
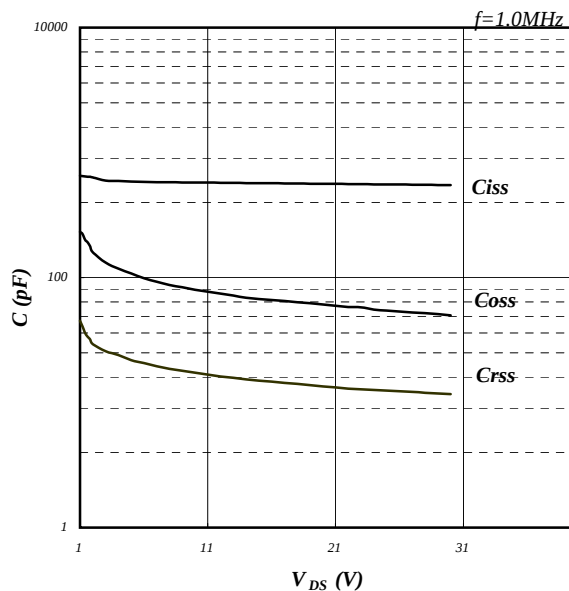
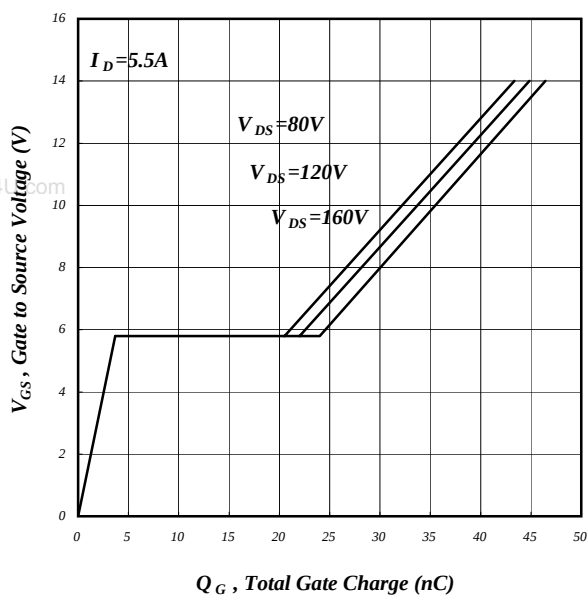


Fig 8. Effective Transient Thermal Impedance



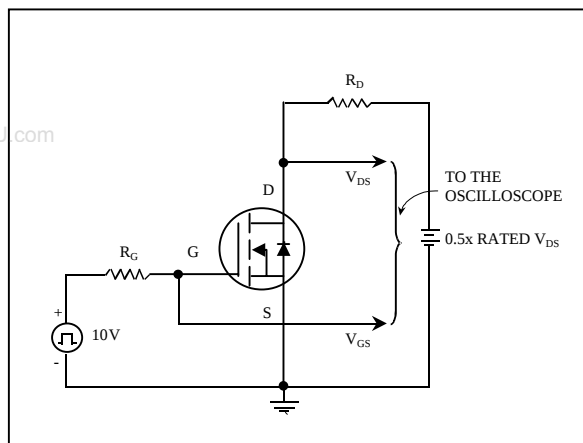


Fig 13. Switching Time Circuit

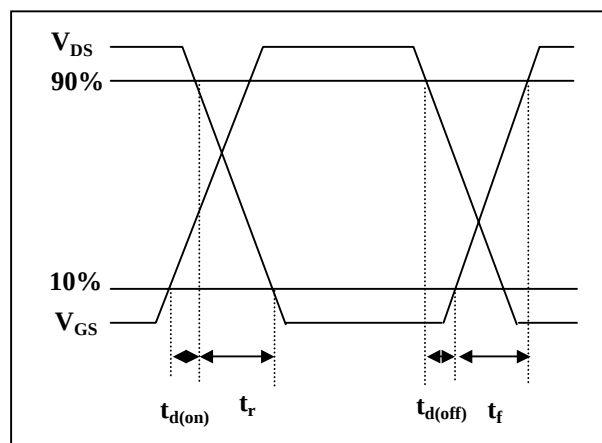


Fig 14. Switching Time Waveform

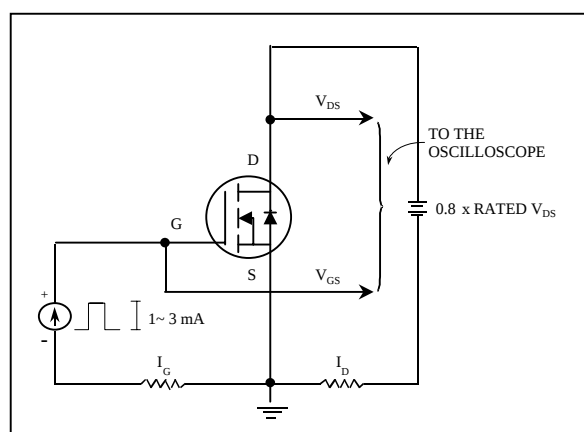


Fig 15. Gate Charge Circuit

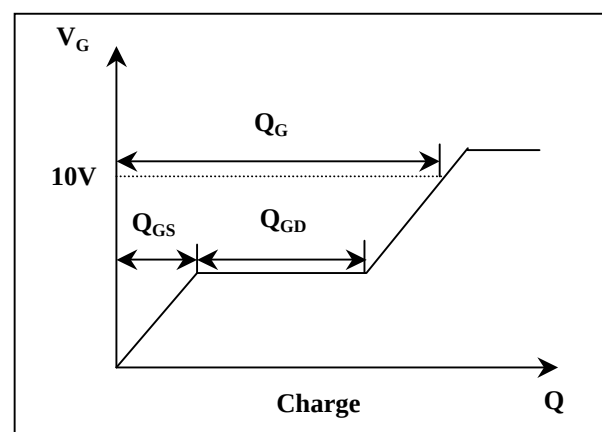


Fig 16. Gate Charge Waveform