

Document Title**256K x 16bit 2.7 ~ 3.6V Super low Power FCMOS Slow SRAM**Revision History

<u>Revision No</u>	<u>History</u>	<u>Draft Date</u>	<u>Remark</u>
00	Initial Draft	Dec.26.2001	Preliminary
01	Absolute Maximum Ratings - Vcc changed -0.3V to 4.6V -> -0.3V to 4.0V DC Electric Characteristics - ICC changed 4mA -> 3mA - ICC1 changed 25mA at 55ns -> 20mA at 55ns - ICC1 changed 20mA at 70ns -> 15mA at 70ns - ICC1 changed 3mA at 1us -> 2mA at 1us AC Test Conditions - Output Load changed 5pF -> 30pF Data Retention Electric Characteristics - ICCDR changed 10uA -> 6uA Marking Information - Part Name changed HY62KF6403E ->HY62KF16403E	Nov.14.2002	Final

DESCRIPTION

The HY62KF16403E is a high speed, super low power and 4Mbit full CMOS SRAM organized as 256K words by 16bits. The HY62KF16403E uses high performance full CMOS process technology and is designed for high speed and low power circuit technology. It is particularly well-suited for the high density low power system application. This device has a data retention mode that guarantees data to remain valid at a minimum power supply voltage of 1.2V.

FEATURES


- Fully static operation and Tri-state output
- TTL compatible inputs and outputs
- Battery backup
 - . 1.2V(min) data retention
- Standard pin configuration
 - . 44pin 400mil TSOP-II(Forward)

Product No.	Voltage (V)	Speed (ns)	Operation Current/Icc(mA)	Standby Current(uA)		Temperature (°C)
				SL	LL	
HY62KF16403E-I	2.7~3.6	55/70	3	6	15	-40~85


Note 1. I : Industrial

2. Current value is max.

PIN CONNECTION

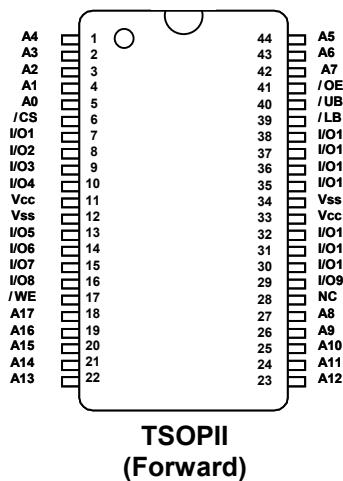

BLOCK DIAGRAM

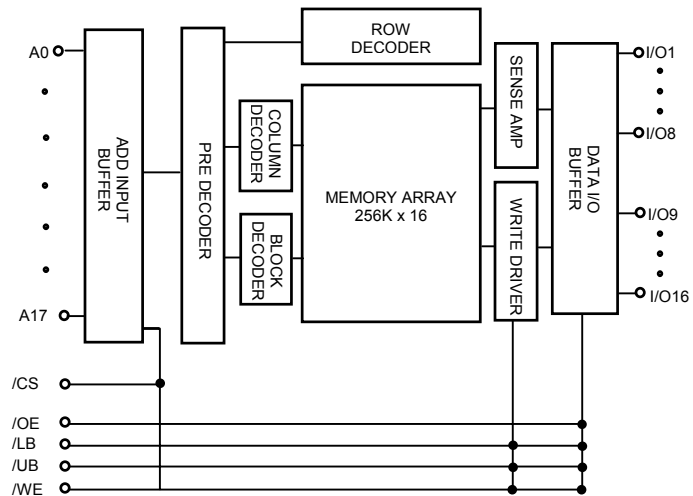

PIN DESCRIPTION

Pin Name	Pin Function	Pin Name	Pin Function
/CS	Chip Select	I/O1~I/O16	Data Inputs/Outputs
/WE	Write Enable	A0~A17	Address Inputs
/OE	Output Enable	Vcc	Power (2.7~3.6V)
/LB	Lower Byte Control (I/O1~I/O8)	Vss	Ground
/UB	Upper Byte Control (I/O9~I/O16)	NC	No Connection

ORDERING INFORMATION

Part No.	Speed	Power	Temp	Package
HY62KF16403E-SD(I)	55/70	SL-part	I	TSOP-II
HY62KF16403E-DD(I)	55/70	LL-part	I	TSOP-II

Note 1. I : Industrial

ABSOLUTE MAXIMUM RATINGS (1)

Symbol	Parameter	Rating	Unit	Remark
V _{IN} , V _{OUT}	Input/Output Voltage	-0.3 to V _{CC} +0.3V	V	
V _{CC}	Power Supply	-0.3 to 4.0	V	
T _A	Operating Temperature	-40 to 85	°C	HY62KF16403E-I
T _{STG}	Storage Temperature	-55 to 150	°C	
P _D	Power Dissipation	1.0	W	
T _{SOLDER}	Ball Soldering Temperature & Time	260 • 10	°C•sec	

Note

- Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is stress rating only and the functional operation of the device under these or any other conditions above those indicated in the operation of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect reliability.

TRUTH TABLE

/CS	/WE	/OE	/LB	/UB	Mode	I/O Pin		Power
						I/O1~I/O8	I/O9~I/O16	
H	X	X	X	X	Deselected	High-Z	High-Z	Standby
L	H	H	X	X	Output Disabled	High-Z	High-Z	Active
	X	X	H	H				
L	H	L	L	H	Read	DOUT	High-Z	Active
			H	L		High-Z	DOUT	
			L	L		DOUT	DOUT	
L	L	X	L	H	Write	DIN	High-Z	Active
			H	L		High-Z	DIN	
			L	L		DIN	DIN	

Note:

- H=V_{IH}, L=V_{IL}, X=don't care (V_{IL} or V_{IH})
- /UB, /LB(Upper, Lower Byte enable)
These active LOW inputs allow individual bytes to be written or read.
When /LB is LOW, data is written or read to the lower byte, I/O 1 -I/O 8.
When /UB is LOW, data is written or read to the upper byte, I/O 9 -I/O 16.

RECOMMENDED DC OPERATING CONDITION

Symbol	Parameter	Min.	Typ	Max.	Unit
V _{CC}	Supply Voltage	2.7	3.0 or 3.3	3.6	V
V _{SS}	Ground	0	0	0	V
V _{IH}	Input High Voltage	2.2	-	V _{CC} +0.3	V
V _{IL}	Input Low Voltage	-0.3 ¹	-	0.6	V

Note : 1. Undershoot : V_{IL} = -1.5V for pulse width less than 30ns
 2. Undershoot is sampled, not 100% tested.

DC ELECTRICAL CHARACTERISTICS

T_A = -40°C to 85°C

Sym	Parameter	Test Condition			Min	Typ ¹	Max	Unit
I _{LI}	Input Leakage Current	V _{SS} ≤ V _{IN} ≤ V _{CC}			-1	-	1	uA
I _{LO}	Output Leakage Current	V _{SS} ≤ V _{OUT} ≤ V _{CC} , /CS = V _{IH} or /OE = V _{IH} or /WE = V _{IL}			-1	-	1	uA
I _{CC}	Operating Power Supply Current	/CS = V _{IL} , V _{IN} = V _{IH} or V _{IL} , I _{I/O} = 0mA					3	mA
I _{CC1}	Average Operating Current	/CS = V _{IL} , V _{IN} = V _{IH} or V _{IL} , Cycle Time = Min, 100% Duty, I _{I/O} = 0mA	55ns				20	mA
			70ns				15	mA
		/CS ≤ 0.2V, V _{IN} ≤ 0.2V or V _{IN} ≥ V _{CC} -0.2V, Cycle Time = 1us, 100% Duty, I _{I/O} = 0mA					2	mA
I _{SB}	Standby Current (TTL Input)	/CS = V _{IH} , V _{IN} = V _{IH} or V _{IL}					300	uA
I _{SB1}	Standby Current (CMOS Input)	/CS ≥ V _{CC} - 0.2V, V _{IN} ≥ V _{CC} - 0.2V or V _{IN} ≤ V _{SS} + 0.2V	3.0~	SL		0.2	6	uA
			3.6V	LL		0.2	15	uA
			2.7~	SL		0.2	6	uA
			3.3V	LL		0.2	12	uA
V _{OL}	Output Low	I _{OL} = 2.1mA			-	-	0.4	V
V _{OH}	Output High	I _{OH} = -1.0mA			2.4	-	-	V

Note

1. Typical values are at V_{CC} = 3.0V T_A = 25°C
2. Typical values are not 100% tested

CAPACITANCE

(Temp = 25°C, f = 1.0MHz)

Symbol	Parameter	Condition	Max.	Unit
C _{IN}	Input Capacitance (Add, /CS, /WE, /OE)	V _{IN} = 0V	8	pF
C _{OUT}	Output Capacitance (I/O)	V _{I/O} = 0V	10	pF

Note : These parameters are sampled and not 100% tested

AC CHARACTERISTICS

T_A = -40°C to 85°C, unless otherwise specified


#	Symbol	Parameter	55ns		70ns		Unit
			Min.	Max.	Min.	Max.	
READ CYCLE							
1	tRC	Read Cycle Time	55	-	70	-	ns
2	tAA	Address Access Time	-	55	-	70	ns
3	tACS	Chip Select Access Time	-	55	-	70	ns
4	tOE	Output Enable to Output Valid	-	30	-	35	ns
5	tBA	/LB, /UB Access Time	-	55	-	70	ns
6	tCLZ	Chip Select to Output in Low Z	10	-	10	-	ns
7	tOLZ	Output Enable to Output in Low Z	5	-	5	-	ns
8	tBLZ	/LB, /UB Enable to Output in Low Z	10	-	10	-	ns
9	tCHZ	Chip Deselection to Output in High Z	0	20	0	25	ns
10	tOHZ	Out Disable to Output in High Z	0	20	0	25	ns
11	tBHZ	/LB, /UB Disable to Output in High Z	0	20	0	25	ns
12	tOH	Output Hold from Address Change	10	-	10	-	ns
WRITE CYCLE							
13	tWC	Write Cycle Time	55	-	70	-	ns
14	tCW	Chip Selection to End of Write	50	-	60	-	ns
15	tAW	Address Valid to End of Write	50	-	60	-	ns
16	tBW	/LB, /UB Valid to End of Write	50	-	60	-	ns
17	tAS	Address Set-up Time	0	-	0	-	ns
18	tWP	Write Pulse Width	45	-	50	-	ns
19	tWR	Write Recovery Time	0	-	0	-	ns
20	tWHZ	Write to Output in High Z	0	20	0	20	ns
21	tDW	Data to Write Time Overlap	25	-	30	-	ns
22	tDH	Data Hold from Write Time	0	-	0	-	ns
23	tOW	Output Active from End of Write	5	-	5	-	ns

AC TEST CONDITIONS

T_A = -40°C to 85°C, unless otherwise specified

Parameter		Value
Input Pulse Level		0.4V to 2.2V
Input Rise and Fall Time		5ns
Input and Output Timing Reference Level		1.5V
Output Load	t _{CLZ} , t _{OLZ} , t _{CHZ} , t _{OHZ} , t _{WHZ} , t _{OW}	CL = 30pF + 1TTL Load
	Others	CL = 30pF + 1TTL Load


AC TEST LOADS

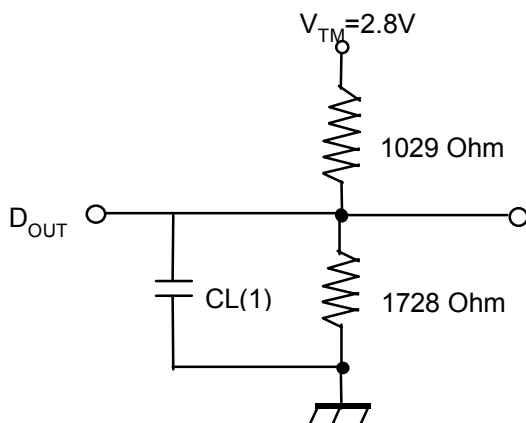


Note 1. Including jig and scope capacitance

TIMING DIAGRAM


READ CYCLE 1 (Note 1,4)

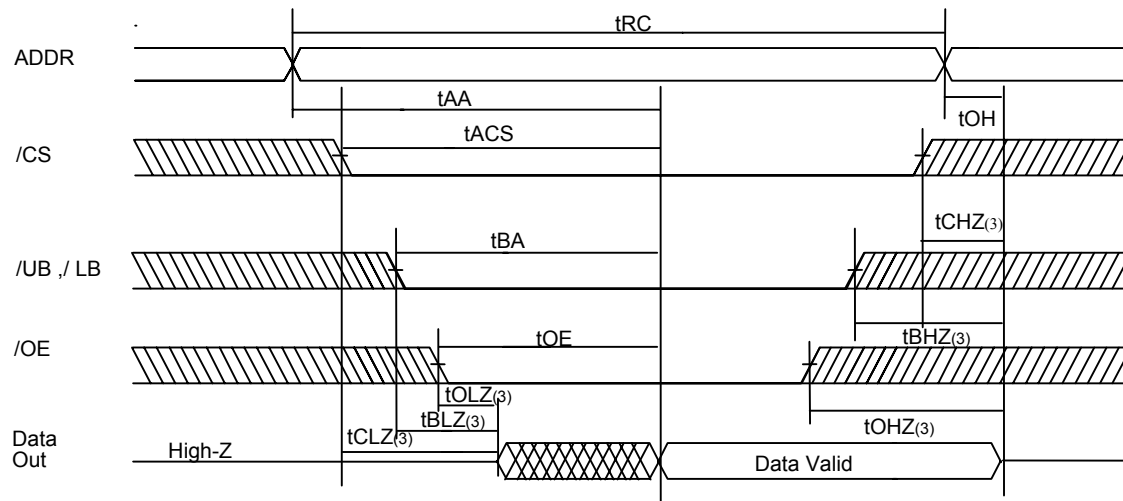

READ CYCLE 2 (Note 1,2,4)

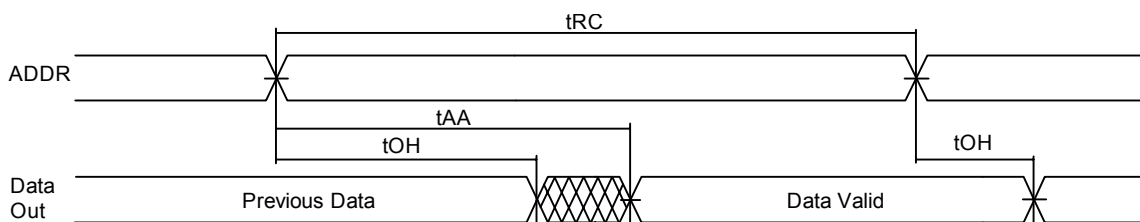

READ CYCLE 3 (Note 1,2,4)

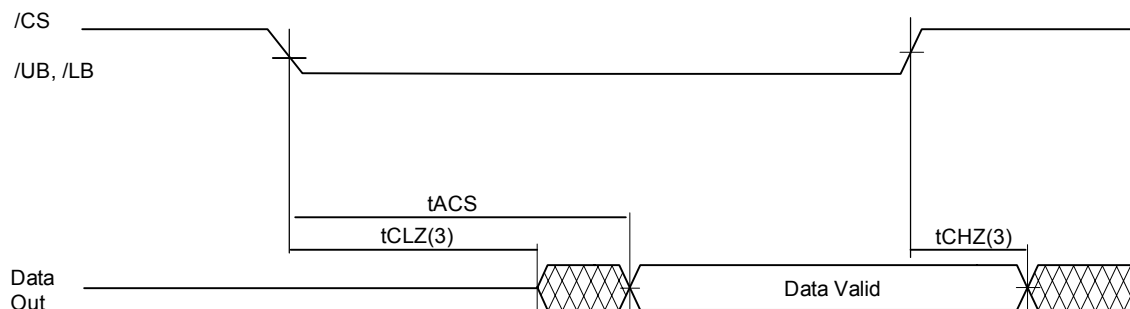

Notes:

1. A read occurs during the overlap of a low /OE, a high /WE, a low /CS and /UB and/or /LB .
2. /OE = V_{IL}
3. t_{CHZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
4. /CS in high for the standby, low for active
/UB and /LB in high for the standby, low for active

The timing diagram illustrates the relationship between the 28C01B device and its external signals. The signals shown are ADDR, /CS, /UB, /LB, /WE, Data In, and Data Out. The diagram includes several timing parameters: t_{WC} (Write Cycle time), t_{CW} (Chip Write time), $t_{WR(2)}$ (Write Recovery time), t_{AW} (Address Valid time), t_{BW} (Bus Valid time), t_{WP} (Write Pulse time), t_{AS} (Address Setup time), $t_{WHZ(3,7)}$ (Write High-Z time), t_{DW} (Data Valid time), t_{DH} (Data Hold time), t_{OW} (Output Valid time), and t_{OW} (Output Hold time). The Data In signal is shown as High-Z during the write cycle. The Data Out signal is shown as High-Z during the write cycle and then transitions to a valid state during the read cycle.

The timing diagram illustrates the relationship between the 74VHC040's control signals and data bus during a write operation. The signals shown are ADDR, /CS, /UB, /LB, /WE, Data In, and Data Out. Key timing parameters are labeled: tWC (Write Cycle time), tAS (Address Setup time), tCW (Chip Write time), tWR(2) (Write Recovery time), tAW (Address Hold time), tBW (Bus Hold time), tWP (Write Pulse time), tDW (Data Valid time), and tDH (Data Hold time). The Data In signal is shown as High-Z during the address setup and hold times, and as Data Valid during the write cycle. The Data Out signal is shown as High-Z throughout the entire operation.

Notes:

1. A write occurs during the overlap of a low /WE, a low /CS and a low /UB and/or /LB .
2. tWR is measured from the earlier of /CS, /LB, /UB, or /WE going high to the end of write cycle.
3. During this period, I/O pins are in the output state so that the input signals of opposite phase to the output must not be applied.
4. If the /CS, /LB and /UB low transition occur simultaneously with the /WE low transition or after the /WE transition, outputs remain in a high impedance state.
5. Q(data out) is the same phase with the write data of this write cycle.
6. Q(data out) is the read data of the next address.
7. /CS in high for the standby, low for active
/UB and /LB in high for the standby, low for active

DATA RETENTION ELECTRIC CHARACTERISTIC


TA = -40°C to 85°C

Symbol	Parameter	Test Condition		Min	Typ ¹	Max	Unit
VDR	Vcc for Data Retention	/CS ≥ Vcc - 0.2V, VIN ≥ Vcc - 0.2V or VIN ≤ Vss + 0.2V		1.2	-	3.6	V
Iccdr	Data Retention Current	Vcc=1.5V, /CS ≥ Vcc - 0.2V or VIN ≥ Vcc - 0.2V or VIN ≤ Vss + 0.2V	SL	-	0.1	3	uA
			LL	-	0.1	6	uA
tCDR	Chip Deselect to Data Retention Time	See Data Retention Timing Diagram		0	-	-	ns
tR	Operating Recovery Time			tRC	-	-	ns

Notes:


1. Typical values are under the condition of TA = 25°C.
2. Typical value are sampled and not 100% tested

DATA RETENTION TIMING DIAGRAM

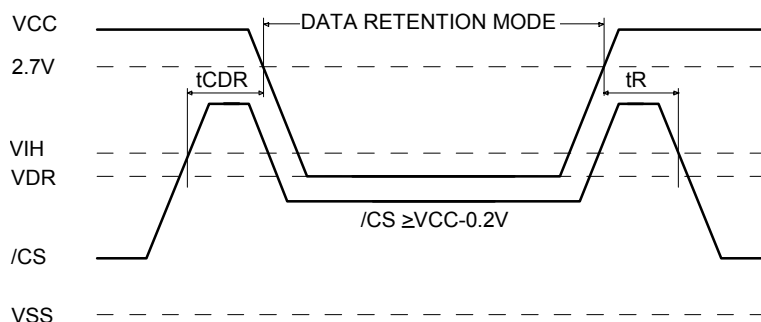

PACKAGE INFORMATION

44pin 400mil Thin Small Outline Package Forward (D)

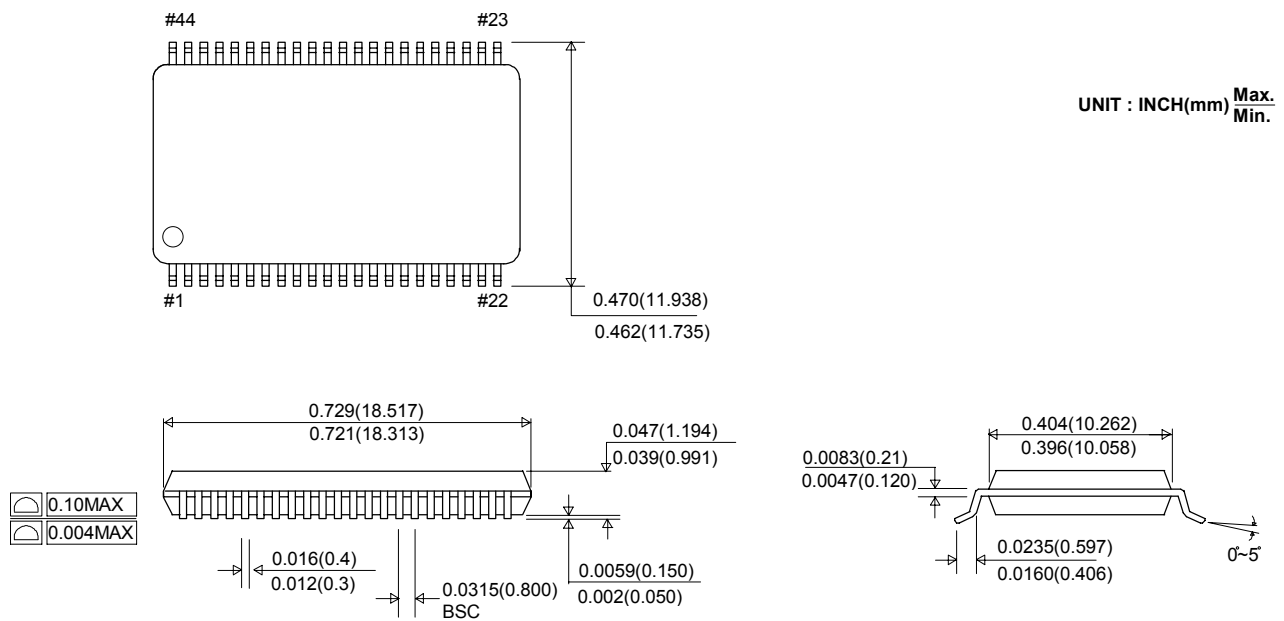

MARKING INFORMATION

Package	Marking Example																																															
TSOP-II (Forward)	<table><tr><td>h</td><td>y</td><td>n</td><td>i</td><td>x</td><td></td><td></td><td></td><td></td><td></td><td>y</td><td>y</td><td>w</td><td>w</td><td>p</td></tr><tr><td>H</td><td>Y</td><td>6</td><td>2</td><td>K</td><td>F</td><td>1</td><td>6</td><td>4</td><td>0</td><td>3</td><td>E</td><td>c</td><td>s</td><td>s</td><td>t</td></tr><tr><td>K</td><td>O</td><td>R</td><td>E</td><td>A</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	h	y	n	i	x						y	y	w	w	p	H	Y	6	2	K	F	1	6	4	0	3	E	c	s	s	t	K	O	R	E	A											
h	y	n	i	x						y	y	w	w	p																																		
H	Y	6	2	K	F	1	6	4	0	3	E	c	s	s	t																																	
K	O	R	E	A																																												

Index	
• hynix	: hynix Logo
• yy	: Year (ex : 02 = year 2002, 03 = year 2002)
• ww	: Work Week (ex : 12 = ww12)
• p	: Process Code
• HY62KF16403E	: Part Name
• c	: Power Consumption
	- D : Low Low Power
	- S : Super Low Power
• ss	: Speed
	- 55 : 55ns
	- 70 : 70ns
• t	: Temperature
	- I : Industrial (-40 ~ 85 °C)
• KOREA	: Origin Country
Note	
- Capital Letter	: Fixed Item
- Small Letter	: Non-fixed Item (Except hynix)