

NEC
 ELECTRONIC DEVICE

BIPOLAR ANALOG INTEGRATED CIRCUIT

μ PC1253H2

RMS LEVEL SENSOR FOR dbx NOISE REDUCTION SYSTEM

DESCRIPTION


The μ PC1253H2 is dbx noise reduction system RMS (Root Mean Square) level sensor, used in tape deck and other audio equipment.

The μ PC1253H2 features high accurate RMS level sensor for wide input due to NEC's super low noise and high h_{FE} PNP process.

Since the package is 8 pin SIP, it can be built in a compact set.

PACKAGE DIMENSIONS

in millimeters (inches)

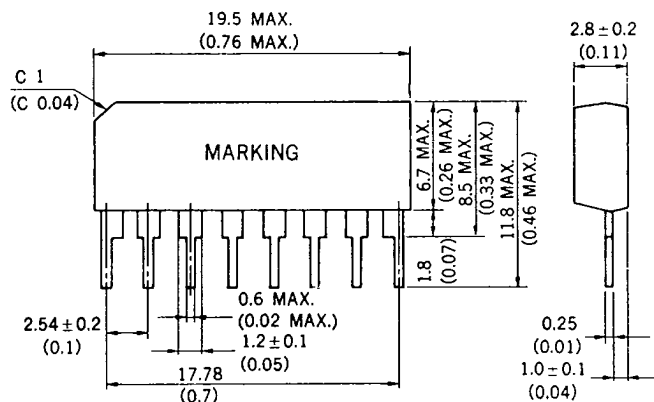

FEATURES


- Wide operating supply voltage
- Excellent linearity Control Constant
- Wider input range

$$V_{CC} = \pm 4 \text{ to } \pm 15 \text{ V (TYP. } \pm 12 \text{ V)}$$

$$V_C = 5.9 \text{ mV/dB}$$

$$v_{in} = -40 \text{ dBV to } +10 \text{ dBV}$$

FUNCTIONAL BLOCK DIAGRAM

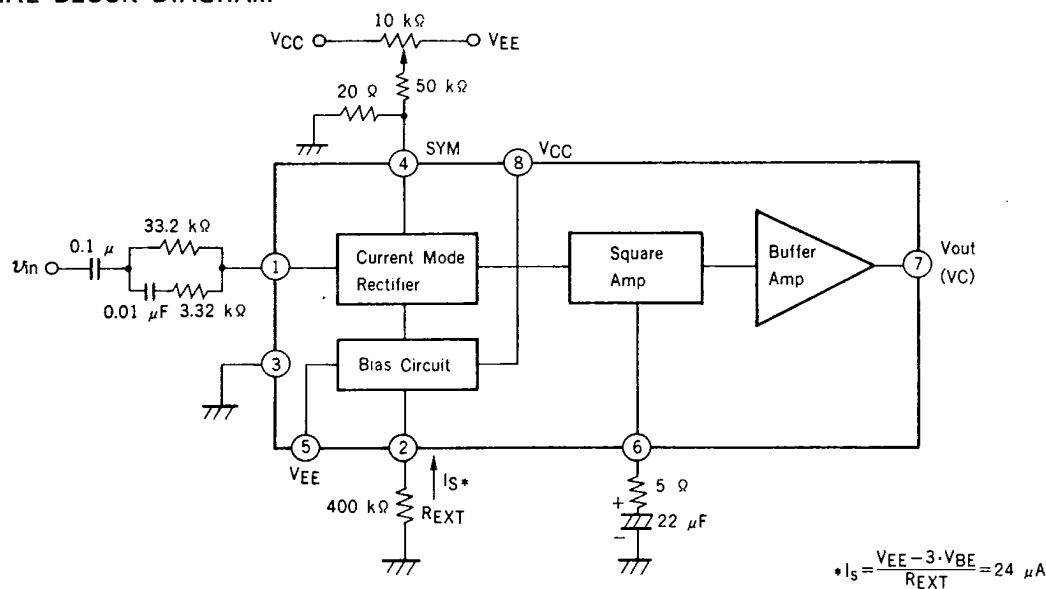

Nippon Electric Co., Ltd.

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage	V_{CC}, V_{EE}	± 15	V
Supply Current	I_{CC}	30	mA
Power Dissipation	P_D	330*	mW
Operating Temperature Range	T_{opt}	-20 to +75	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-40 to +125	$^\circ\text{C}$

* Value at $T_a = 75^\circ\text{C}$


RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT
Operating Supply Voltage	V_{CC}, V_{EE}	± 4	± 12	± 15	V
Input Level Range	v_{in}	-40		+10	dBV
Bias Current	I_s		24		μA



ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$, $V_{CC} = +12\text{ V}$, $V_{EE} = -12\text{ V}$, $f = 1\text{ kHz}$, $Z_{in} = 33\text{ k}\Omega$)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Supply Current	I_{CC}		0.9	2.0	mA	No Signal
Output Level	V_O^*	111	136	161	mV	$V_{IN} = 0\text{ dBV}$
Control Constant	V_C	5.8	5.9	6.1	mV/dB	$v_{in} = -40\text{ dBV to } +10\text{ dBV}$

* Output Level is defined as follows.

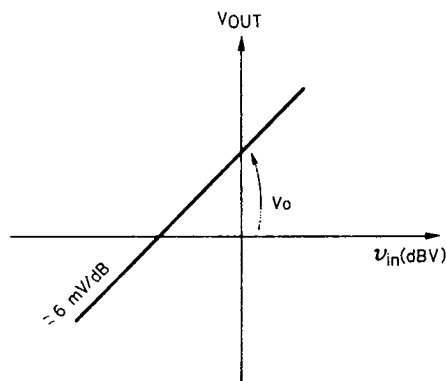


TEST CIRCUIT

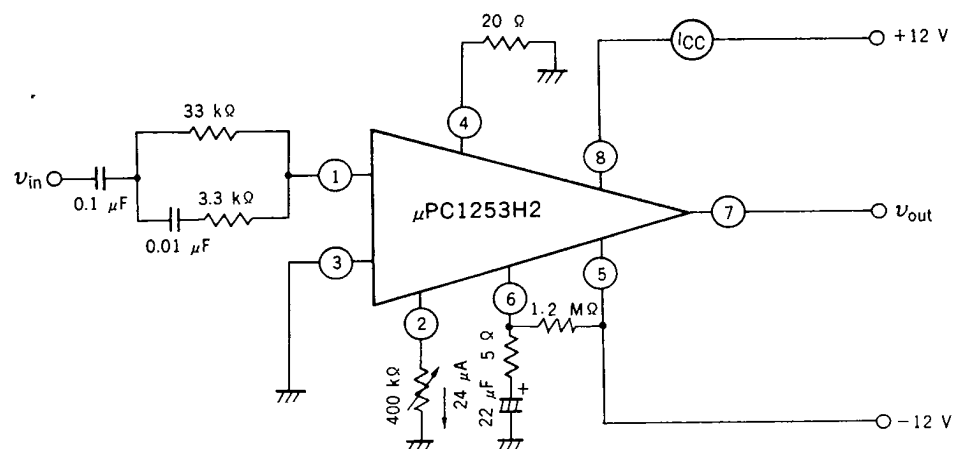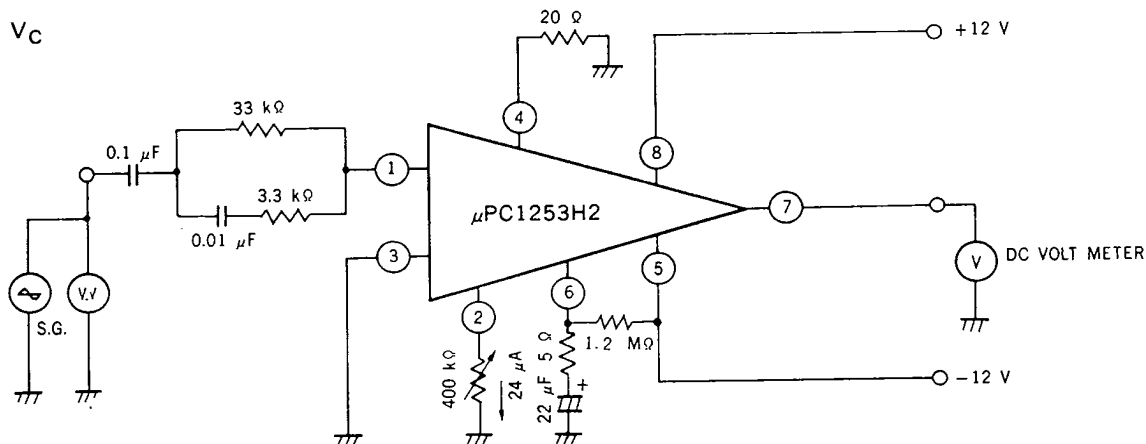(1) I_{CC} (2) V_O, V_C 

Note for use



1. Since μ PC1253H2 is designed for dbx Noise Reduction System, recommend to use μ PC1253H2 with μ PC1252H2 (VCA) in case of composing dbx NR system.
2. Documents issued by dbx incorporated have priority over NEC, such as application note or data about dbx NR system.

APPLICATION CIRCUIT

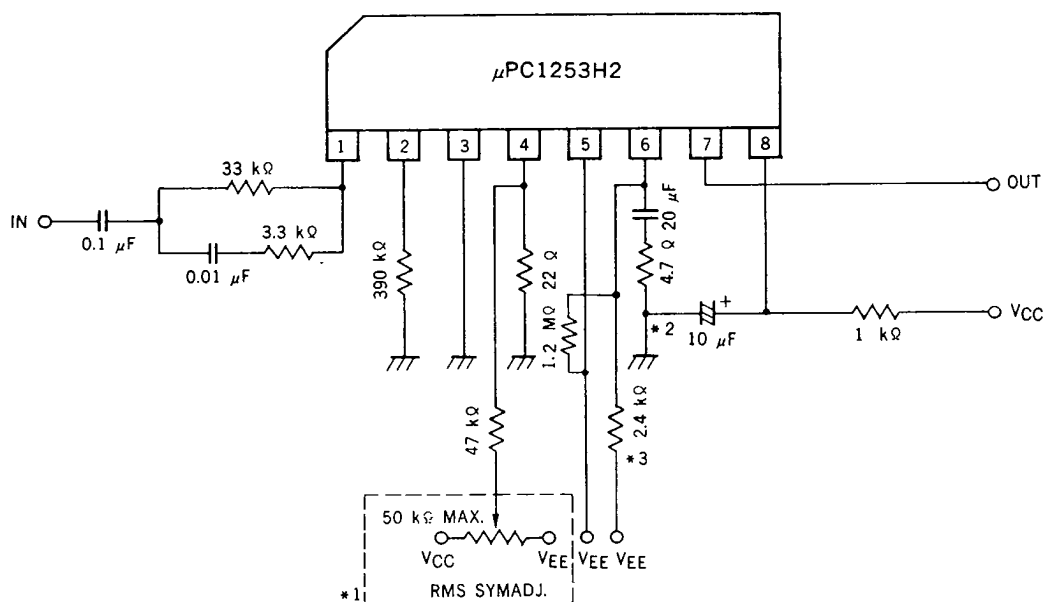

- *1. Possible to omit RMS SYM.ADJ. in case of using this IC with μPC1252H2 at T.H.D. $\geq 0.05\%$.
 - *2. Make GND common about these terminals.
 - *3. This resistor is for RMS time constant.
- Connect 7 PIN OUT to GC1 of μPC1252H2 (VCA).

TYPICAL CHARACTERISTICS (Ta = 25 °C)

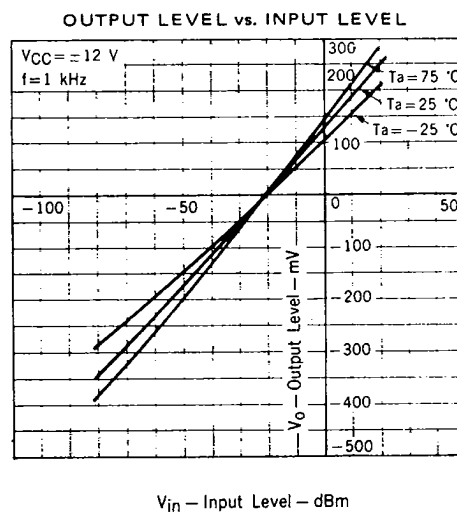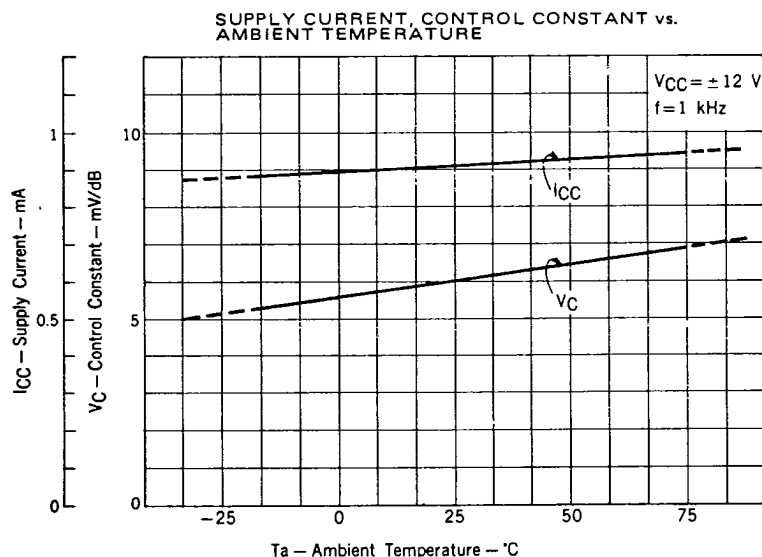

Nippon Electric Co., Ltd.

NEC Building, 33-1, Shiba Gochome, Minato-ku, Tokyo 108, Japan
Tel: Tokyo 454-1111
Telex Address: NECTOK J22686
Cable Address: MICROPHONE TOKYO

IC-1432
FEB.-25-82M
Printed in Japan

245