

**Single Event Radiation Hardened
High Speed, Current Mode PWM**



The IS-1845ASRH is designed to be used in switching power supplies operating in current-mode. The rising edge of the on-chip oscillator


turns on the output. Turn-off is controlled by the current sense comparator and occurs when the sensed current reaches a peak controlled by the error amplifier.

Constructed with Intersil's Rad Hard Silicon Gate (RSG) dielectrically isolated BiCMOS process, these devices are immune to single event latch-up and have been specifically designed to provide a high level of immunity to single event transients. All specified parameters are guaranteed and tested for 300krad(Si) total dose performance.


Detailed Electrical Specifications for these devices are contained in SMD 5962-01509. A "hot-link" is provided on our website for downloading the SMD.

Pinouts

**IS7-1845ASRH (CDIP2-T8 SBDIP)
TOP VIEW**



**IS9-1845ASRH (FLATPACK)
TOP VIEW**

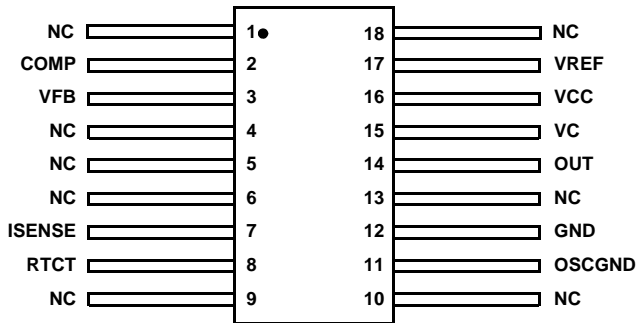

NOTES:

1. Grounding the Comp pin does not inhibit the output. The output may be inhibited by applying >1.2V to the ISENSE pin.
2. This part should be operated with CT=3.3nF and RT=10k timing components only.

Features

- Electrically Screened to DSCC SMD # 5962-01509
- QML Qualified per MIL-PRF-38535 Requirements
- Radiation Environment
 - Total Dose 300 krad(Si) (Max)
 - SEL Immune Dielectrically Isolated
 - SEU Immune 35MeV/mg/cm²
 - SEU Cross-Section at 89MeV/mg/cm². 5 x 10⁻⁶cm²
- Low Start-up Current 100µA (Typ)
- Fast Propagation Delay 80ns (Typ)
- Supply Voltage Range 12V to 20V
- High Output Drive. 1A (Peak, Typ)
- Under Voltage Lockout. .8.8V Start (Typ), 8.2V Stop (Typ)

Applications

- Current-Mode Switching Power Supplies
- Control of High Current FET Drivers
- Motor Speed and Direction Control

Ordering Information

| ORDERING NUMBER | INTERNAL MKT. NUMBER | TEMP. RANGE (°C) |
|--------------------|----------------------|------------------|
| 5962F0150901VPC | IS7-1845ASRH-Q | -50 to 125 |
| 5962F0150901QPC | IS7-1845ASRH-8 | -50 to 125 |
| 5962F0150901VXC | IS9-1845ASRH-Q | -50 to 125 |
| 5962F0150901QXC | IS9-1845ASRH-8 | -50 to 125 |
| IS7-1845ASRH/Proto | IS1-1845ASRH/Proto | -50 to 125 |
| IS9-1845ASRH/Proto | IS9-1845ASRH/Proto | -50 to 125 |

IS-1845ASRH

Die Characteristics

DIE DIMENSIONS

3090 μm x 4080 μm (121.6 mils x 159.0 mils)
Thickness: 483 μm \pm 25.4 μm (19 mils \pm 1 mil)

INTERFACE MATERIALS

Glassivation

Type: Phosphorus Silicon Glass (PSG)
Thickness: 8.0kÅ \pm 1.0kÅ

Top Metallization

Type: AlSiCu
Thickness: 16.0kÅ \pm 2kÅ

Substrate

Radiation Hardened Silicon Gate,
Dielectric Isolation

Backside Finish

Silicon

ASSEMBLY RELATED INFORMATION

Substrate Potential

Unbiased (DI)

ADDITIONAL INFORMATION


Worst Case Current Density

$<2.0 \times 10^5 \text{ A/cm}^2$

Transistor Count

582

Metallization Mask Layout

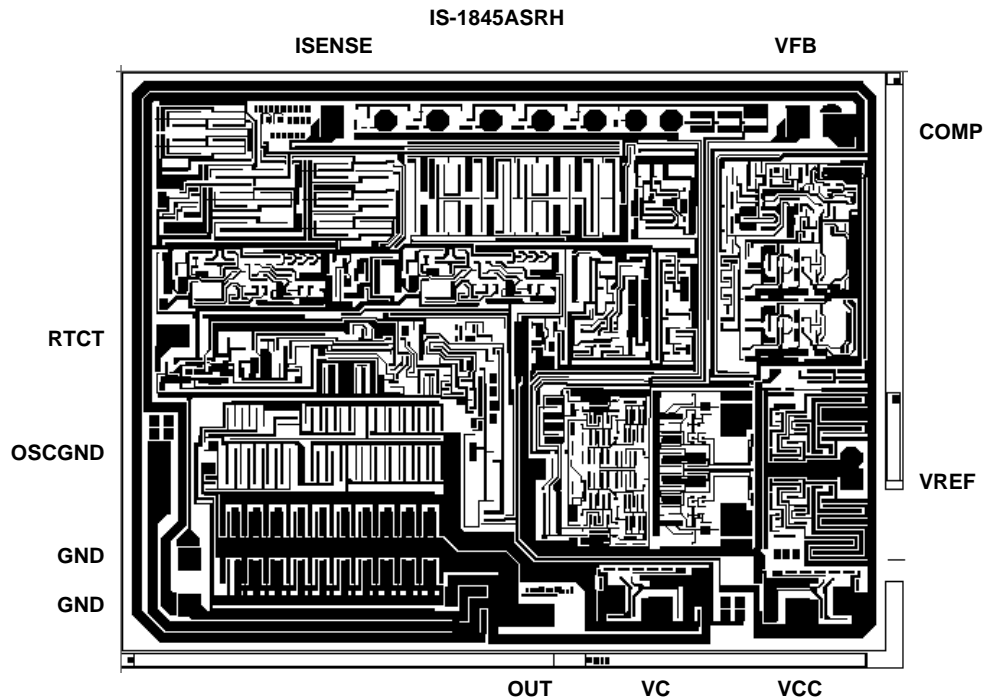

NOTES:

- Both the GND pads must be bonded to ground.
- The OUT double-sized bond pad must be double bonded for current sharing purposes.
- The OSCGND double-sized bond pad must be double bonded to ground for current sharing purposes.

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems.
Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com