




[2 YEAR WARRANTY]

CE (LVD) (48V Models only)

BXA3 SERIES

Single and dual output

- 3 Watts in DIL Package
- Pin compatible with DR series
- 21 models including 3.3VDC output
- Wide input ranges 9-18V, 18-36V, 36-75V
- EN55022 conducted emissions level A
- Indefinite short circuit protection
- Operating temperature range -25°C to +105°C
- Input voltage range to ETS300-132-2
- UL, VDE and CSA safety approvals

The BXA3 Series of DC/DC converters is designed to offer the optimum cost/benefit power solution for a wide variety of applications including public and private telecommunications, industrial systems and process and test equipment. The series consists of 21 models with input voltages of 9-18VDC, 18-36VDC and 36-75VDC, and offers standard output voltages of 3.3V, 5V, 12V and 15V in both single and dual output configurations. Indefinite short circuit protection, overvoltage protection, 60mV output ripple and EN55022 level A conducted noise compliance minimize design-in time, cost and eliminate the need for external components.

SPECIFICATION

All specifications are typical at nominal input, full load at 25°C unless otherwise stated

OUTPUT SPECIFICATIONS			
Voltage accuracy			±1.0%
Line regulation	LL to HL, all outputs		±2.5%
Load regulation	FL to NL		±2.5%
Ripple and noise 5Hz to 20MHz	+5V output	60mV pk-pk, max., 15mV rms	
	All others	100mV pk-pk, max., 15mV rms	
Temperature coefficient			±0.02%/°C, max.
Over voltage protection	Clamp diode		135% Vout
Short circuit protection		Continuous automatic recovery	
INPUT SPECIFICATIONS			
Input voltage range	12VDC	9 to 18VDC	
	24VDC	18 to 36VDC	
	48VDC	36 to 75VDC	
Input filter	Suffix '-F', See Note 5	Pi type	
Reverse voltage protection	See Note 7	Yes	
Max. input rise and fall time	Output remains within specification	5V/ms	

EMC CHARACTERISTICS			
Conducted emissions	EN55022, FCC part 15 Suffix '-F' versions See Notes 5 and 6		Level A
GENERAL SPECIFICATIONS			
Efficiency	See table		68% typical
Isolation voltage	Input/output		500VDC
Switching frequency	Variable		200kHz to 1MHz
Approvals and standards	VDE0805, EN60950, IEC950 UL1950, CSA C22.2 No. 950		
Case material			Non-conductive black plastic
Material flammability			UL94V-0 min.
Weight			15g (0.53oz)
MTBF	MIL-HDBK-217F		800,000 hours
ENVIRONMENTAL SPECIFICATIONS			
Thermal performance	Operating ambient (See derating curve)		-25°C to +105°C
	Non-operating amb		-40°C to +105°C
	Derating		None required
	Cooling		Free air convection cooled
Relative humidity	Non-condensing		5% to 95% RH
Altitude	Operating		10,000 feet max.
	Non operating		40,000 feet max.
Vibration	5Hz to 500Hz		2.5G rms (approx.)

International Safety Standard Approvals

VDE VDE0805/EN60950/IEC950 Licence No. 5856

UL UL1950 File No. E136005


CSA CSA C22.2 No. 950 File No. LR41062C

3 Watt Wide input DC/DC converters

INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT (1)	INPUT CURRENT (2)	TYPICAL EFFICIENCY	REGULATION		MODEL NUMBER (5)
					LINE (3)	LOAD (4)	
9-18VDC	3.3V	600mA	245mA	68%	±2.5%	±2.5%	BXA3-12S3V3
9-18VDC	5.0V	500mA	285mA	74%	±2.5%	±2.5%	BXA3-12S05
9-18VDC	12.0V	250mA	335mA	75%	±2.5%	±2.5%	BXA3-12S12
9-18VDC	15.0V	200mA	335mA	75%	±2.5%	±2.5%	BXA3-12S15
9-18VDC	±5.0V	±250mA	285mA	75%	±2.5%	±2.5%	BXA3-12D05
9-18VDC	±12.0V	±125mA	335mA	75%	±2.5%	±2.5%	BXA3-12D12
9-18VDC	±15.0V	±100mA	335mA	75%	±2.5%	±2.5%	BXA3-12D15
18-36VDC	3.3V	600mA	122mA	68%	±2.5%	±2.5%	BXA3-24S3V3
18-36VDC	5.0V	500mA	140mA	76%	±2.5%	±2.5%	BXA3-24S05
18-36VDC	12.0V	250mA	165mA	76%	±2.5%	±2.5%	BXA3-24S12
18-36VDC	15.0V	200mA	165mA	76%	±2.5%	±2.5%	BXA3-24S15
18-36VDC	±5.0V	±250mA	140mA	76%	±2.5%	±2.5%	BXA3-24D05
18-36VDC	±12.0V	±125mA	165mA	76%	±2.5%	±2.5%	BXA3-24D12
18-36VDC	±15.0V	±100mA	165mA	76%	±2.5%	±2.5%	BXA3-24D15
36-75VDC	3.3V	600mA	61mA	68%	±2.5%	±2.5%	BXA3-48S3V3
36-75VDC	5.0V	500mA	69mA	76%	±2.5%	±2.5%	BXA3-48S05
36-75VDC	12.0V	250mA	83mA	76%	±2.5%	±2.5%	BXA3-48S12
36-75VDC	15.0V	200mA	83mA	76%	±2.5%	±2.5%	BXA3-48S15
36-75VDC	±5.0V	±250mA	83mA	76%	±2.5%	±2.5%	BXA3-48D05
36-75VDC	±12.0V	±125mA	83mA	76%	±2.5%	±2.5%	BXA3-48D12
36-75VDC	±15.0V	±100mA	83mA	76%	±2.5%	±2.5%	BXA3-48D15

Notes

- 1 Maximum.
- 2 Maximum figure at full load (nominal).
- 3 Low line to high line.
- 4 Full load to no load.
- 5 An optional internal filter is available. When the filter is added, the BXA3 will meet VDE0871-A, VDE0878-A and EN55022-A. Add the suffix '-F' to the model number, e.g. **BXA3-12D12-F**.
- 6 Conducted noise filtering to EN55022 level B may be accomplished by putting the following capacitors across the input pins.
 12VDC 5µF ceramic X7R dielectric type
 24VDC 3µF ceramic X7R dielectric type
 48VDC 1µF ceramic X7R dielectric type
- 7 Reverse voltage protection can be implemented by putting a fast blow fuse on the positive input rail. Rate the fuse for 250mA at 48VDC input, 500mA at 24VDC input and 1000mA at 12VDC input.

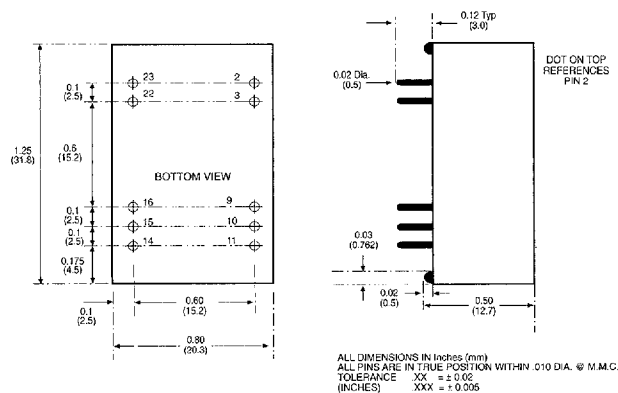

PIN CONNECTIONS		
PIN NUMBER	SINGLE OUTPUT	DUAL OUTPUT
2	-Vin	-Vin
3	-Vin	-Vin
22	+Vin	+Vin
23	+Vin	+Vin
9	No pin	Common
10	No pin	No pin
11	No Connection	-Vout
14	+Vout	+Vout
15	No pin	No pin
16	-Vout	Common

DERATING CURVE
Output Power (Watts)

