

E-Series 2-Way 90° Power Divider 65 - 75 MHz

EQSM-2-70

V3.00

Features

- 2 Way
- 90°
- Surface Mount

Specifications @ 25°C

Frequency Range	65 - 75 MHz	
Insertion Loss	Typical	Maximum
65 - 75 MHz	0.5 dB	0.75 dB
Isolation	Typical	Minimum
65 - 75 MHz	28 dB	25 dB
Amplitude Unbalance	Maximum	
65 - 75 MHz	1 dB	
Phase Unbalance	Maximum	
65 - 75 MHz	3°	

Operating Characteristics

Impedance	50 Ohms Nominal
-----------	-----------------


Ordering Information

Part No.	Packaging
EQSM-2-70	Tube
EQSM-2-70TR	Forward Tape & Reel

Absolute Maximum Ratings

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temp (10 sec)	260°C
Storage Temperature	-55°C to 100°C

SM-1

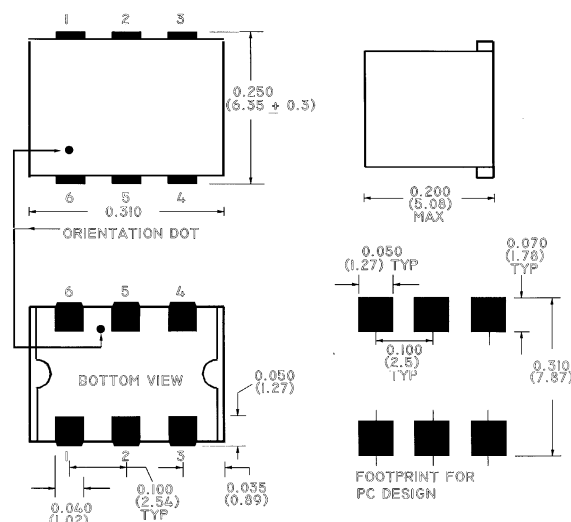

Dimensions in () are in mm.
Unless Otherwise Noted: .x = ±0.04 (1.00)
.xx = ±0.02 (0.50)
.xxx = ±0.010 (0.250)

Pin Configuration

Function	Pin No.
Not Connected	2,5
External 50 Ohms	3
Input	1
Port 1	4
Port 2	6

S 0880 B