

## LM1558/LM1458 Dual Operational Amplifier

### General Description


The LM1558 and the LM1458 are general purpose dual operational amplifiers. The two amplifiers share a common bias network and power supply leads. Otherwise, their operation is completely independent.

The LM1458 is identical to the LM1558 except that the LM1458 has its specifications guaranteed over the temperature range from 0°C to +70°C instead of -55°C to +125°C.

### Features

- No frequency compensation required
- Short-circuit protection
- Wide common-mode and differential voltage ranges
- Low-power consumption
- 8-lead can and 8-lead mini DIP
- No latch up when input common mode range is exceeded


### Schematic and Connection Diagrams

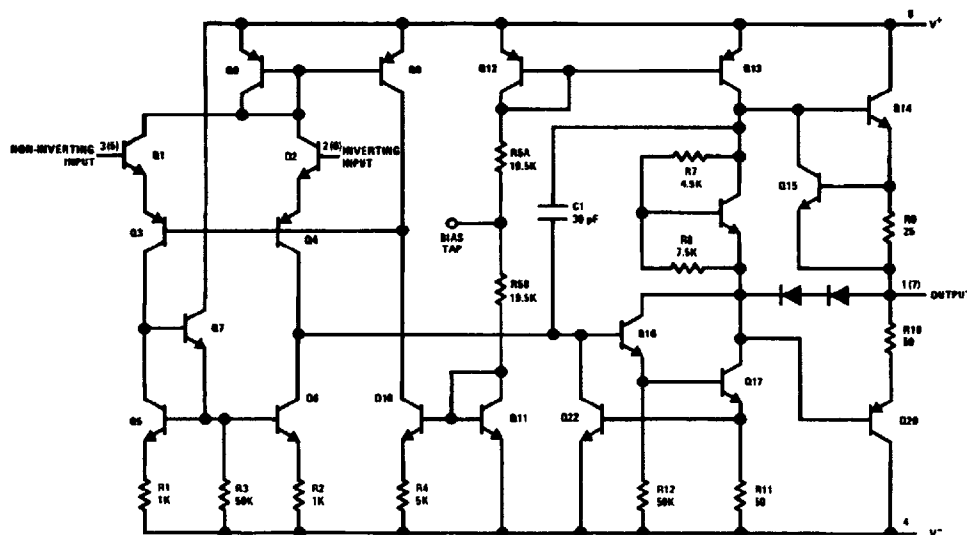

TL/H/7886-1

Note: Numbers in parentheses are pin numbers for amplifier B.

#### Metal Can Package




TL/H/7886-2

#### Top View

Order Number LM1558H,  
LM1558H/883 or LM1458H  
See NS Package Number H08C

#### Dual-In-Line Package

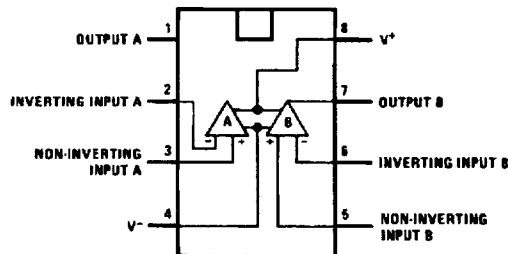

TL/H/7886-3

#### Top View

Order Number LM1558J, LM1558J/883, LM1458J, LM1458M or LM1458N  
See NS Package Number J08A, M08A or N08E

## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications. (Note 4)

|                               |            |
|-------------------------------|------------|
| Supply Voltage                |            |
| LM1558                        | ±22V       |
| LM1458                        | ±18V       |
| Power Dissipation (Note 1)    |            |
| LM1558H/LM1458H               | 500 mW     |
| LM1458N                       | 400 mW     |
| Differential Input Voltage    | ±30V       |
| Input Voltage (Note 2)        | ±15V       |
| Output Short-Circuit Duration | Continuous |

|                                                                                                                                     |                 |
|-------------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Operating Temperature Range                                                                                                         |                 |
| LM1558                                                                                                                              | −55°C to +125°C |
| LM1458                                                                                                                              | 0°C to +70°C    |
| Storage Temperature Range                                                                                                           | −65°C to +150°C |
| Lead Temperature (Soldering, 10 sec.)                                                                                               | 260°C           |
| Soldering Information                                                                                                               |                 |
| Dual-In-Line Package                                                                                                                |                 |
| Soldering (10 seconds)                                                                                                              | 260°C           |
| Small Outline Package                                                                                                               |                 |
| Vapor Phase (60 seconds)                                                                                                            | 215°C           |
| Infrared (15 seconds)                                                                                                               | 220°C           |
| See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices. |                 |
| ESD tolerance (Note 5)                                                                                                              | 300V            |

## Electrical Characteristics (Note 3)

| Parameter                      | Conditions                                                                                                    | LM1558 |     |     | LM1458 |     |     | Units         |
|--------------------------------|---------------------------------------------------------------------------------------------------------------|--------|-----|-----|--------|-----|-----|---------------|
|                                |                                                                                                               | Min    | Typ | Max | Min    | Typ | Max |               |
| Input Offset Voltage           | $T_A = 25^\circ\text{C}$ , $R_S \leq 10\text{ k}\Omega$                                                       |        | 1.0 | 5.0 |        | 1.0 | 6.0 | mV            |
| Input Offset Current           | $T_A = 25^\circ\text{C}$                                                                                      |        | 80  | 200 |        | 80  | 200 | nA            |
| Input Bias Current             | $T_A = 25^\circ\text{C}$                                                                                      |        | 200 | 500 |        | 200 | 500 | nA            |
| Input Resistance               | $T_A = 25^\circ\text{C}$                                                                                      | 0.3    | 1.0 |     | 0.3    | 1.0 |     | M $\Omega$    |
| Supply Current Both Amplifiers | $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$                                                             |        | 3.0 | 5.0 |        | 3.0 | 5.6 | mA            |
| Large Signal Voltage Gain      | $T_A = 25^\circ\text{C}$ , $V_S = \pm 15\text{V}$<br>$V_{OUT} = \pm 10\text{V}$ , $R_L \geq 2\text{ k}\Omega$ | 50     | 160 |     | 20     | 160 |     | V/mV          |
| Input Offset Voltage           | $R_S \leq 10\text{ k}\Omega$                                                                                  |        |     | 6.0 |        |     | 7.5 | mV            |
| Input Offset Current           |                                                                                                               |        |     | 500 |        |     | 300 | nA            |
| Input Bias Current             |                                                                                                               |        |     | 1.5 |        |     | 0.8 | $\mu\text{A}$ |
| Large Signal Voltage Gain      | $V_S = \pm 15\text{V}$ , $V_{OUT} = \pm 10\text{V}$<br>$R_L \geq \text{k}\Omega$                              | 25     |     |     | 15     |     |     | V/mV          |
| Output Voltage Swing           | $V_S = \pm 15\text{V}$ , $R_L = 10\text{ k}\Omega$<br>$R_L = 2\text{ k}\Omega$                                | ±12    | ±14 |     | ±12    | ±14 |     | V             |
|                                |                                                                                                               | ±10    | ±13 |     | ±10    | ±13 |     | V             |
| Input Voltage Range            | $V_S = \pm 15\text{V}$                                                                                        | ±12    |     |     | ±12    |     |     | V             |
| Common Mode Rejection Ratio    | $R_S \leq 10\text{ k}\Omega$                                                                                  | 70     | 90  |     | 70     | 90  |     | dB            |
| Supply Voltage Rejection Ratio | $R_S \leq 10\text{ k}\Omega$                                                                                  | 77     | 96  |     | 77     | 96  |     | dB            |

Note 1: The maximum junction temperature of the LM1558 is 150°C, while that of the LM1458 is 100°C. For operating at elevated temperatures, devices in the H08 package must be derated based on a thermal resistance of 150°C/W, junction to ambient or 20°C/W, junction to case. For the DIP the device must be derated based on a thermal resistance of 187°C/W, junction to ambient.


Note 2: For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage.

Note 3: These specifications apply for  $V_S = \pm 15\text{V}$  and  $-55^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$ , unless otherwise specified. With the LM1458, however, all specifications are limited to  $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$  and  $V_S = \pm 15\text{V}$ .



Note 4: Refer to RETS 1558V for LM1558J and LM1558H military specifications.

Note 5: Human body model, 1.5 k $\Omega$  in series with 100 pF.

# Physical Dimensions inches (millimeters)

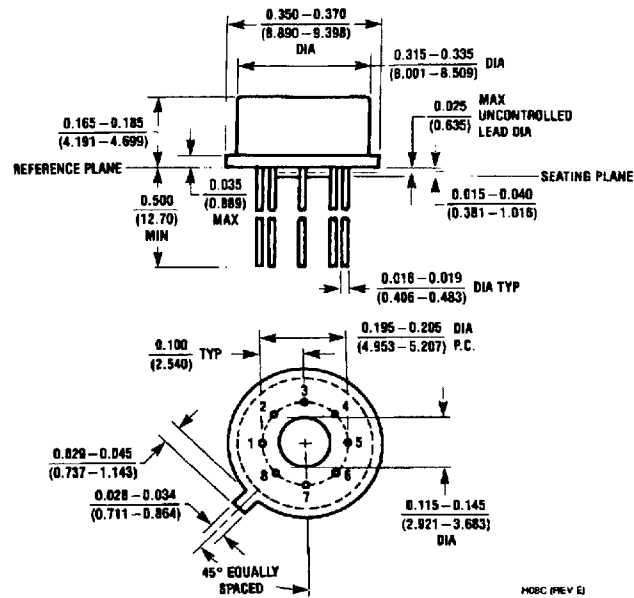




**Metal Can Package (H)**  
Order Number LM1558H, LM1558H/883 or LM1458H  
NS Package Number H08C

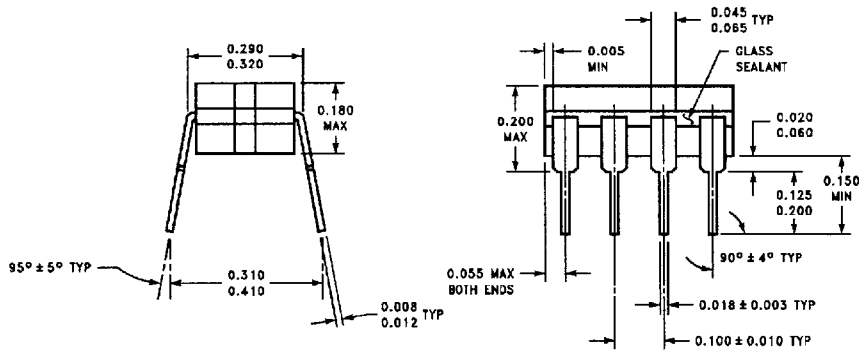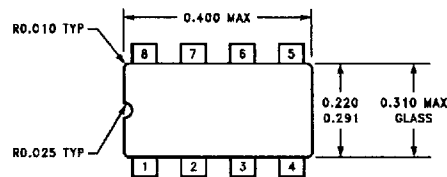


**Ceramic Dual-In-Line Package (J)**  
Order Number LM1558J, LM1558J/883 or LM1458J  
NS Package Number J08A

## Physical Dimensions inches (millimeters) (Continued)

Small Outline Package (M)  
Order Number LM1458M  
NS Package Number M08A

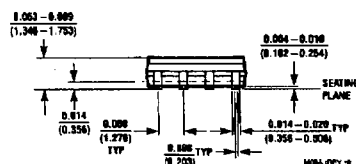

Molded Dual-In-Line Package (N)  
Order Number LM1458N  
NS Package Number N08E

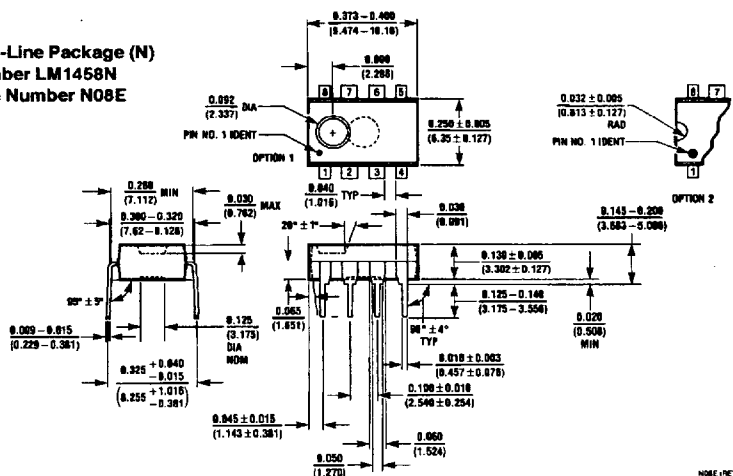

## LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor  
Corporation  
1111 West Bardin Road  
Arlington, TX 76017  
Tel: 1(800) 272-9959  
Fax: 1(800) 737-7018

National Semiconductor  
Europe  
Fax: (+49) 0-180-530 85 86  
Email: cnjwge@1evm2.nsc.com  
Deutsch Tel: (+49) 0-180-530 85 85  
English Tel: (+49) 0-180-532 78 32  
Français Tel: (+49) 0-180-532 93 58  
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor  
Hong Kong Ltd.  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: (852) 2737-1600  
Fax: (852) 2736-9960

National Semiconductor  
Japan Ltd.  
Tel: 81-043-299-2309  
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.