

FUNCTION TABLE

INPUTS				OUTPUTS	
$\overline{OE}_a$	I_a	$\overline{OE}_b$	I_b	Y_a	Y_b
L	L	L	L	L	L
L	H	L	H	H	H
H	X	H	X	(Z)	(Z)

H = High voltage level
L = Low voltage level
X = Don't care
(Z) = High impedance (off) state

ORDERING INFORMATION

DESCRIPTION	ORDER CODE
20-Pin Ceramic DIP	54LS244/BRA, 54S244/BRA
20-Pin Ceramic Flat Pack	54LS244/BSA, 54S244/BSA
20-Pin Ceramic LLCC	54LS244/B2A, 54S244/B2A

INPUT AND OUTPUT LOADING AND FAN-OUT TABLE


PINS	DESCRIPTION	54S	54LS
All	Inputs	1SUL	1LSUL
All	Output	24SUL	30LSUL

NOTE: A 54S Unit Load (SUL) is a $50\mu A$ I_{IH} , and $-2.0mA$ I_{IL} , and a 54LS Unit Load (LSUL) is $20\mu A$ I_{IH} and $-0.4mA$ I_{IL} .


ABSOLUTE MAXIMUM RATINGS (Over operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	54LS	54S	UNIT
V_{CC}	Supply voltage	7.0	7.0	V
V_I	Input voltage range	-0.5 to +7.0	-0.5 to +7.0	V
I_I	Input current range	-30 to +1	-30 to +5	mA
V_O	Voltage applied to output in High output state range	-0.5 to $+V_{CC}$	-0.5 to $+V_{CC}$	V
T_{STG}	Storage temperature range	-65 to +150	-65 to +150	$^{\circ}C$

PIN CONFIGURATION

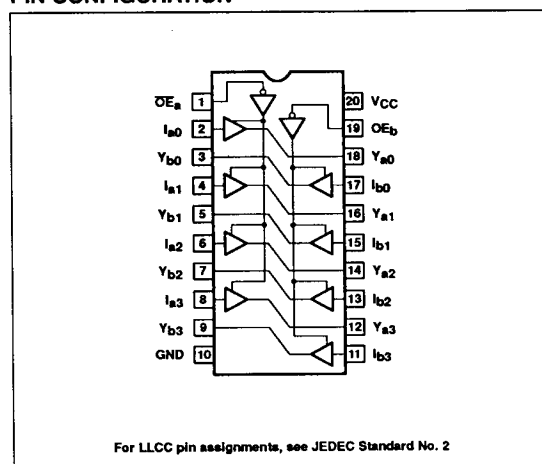

LOGIC SYMBOL

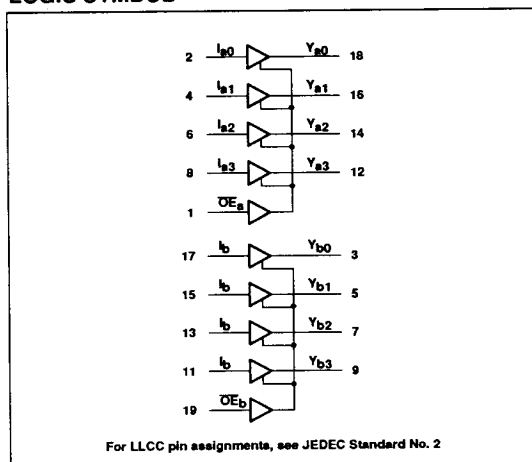

Buffers**54LS244, 54S244****RECOMMENDED OPERATING CONDITIONS**

SYMBOL	PARAMETER	54LS			54S			UNIT
		Min	Nom	Max	Min	Nom	Max	
V_{CC}	Supply voltage	4.5	5.0	5.5	4.5	5.0	5.5	V
V_{IH}	High-level input voltage	2.0			2.0			V
V_{IL}	Low-level input voltage			+0.7			+0.8	V
I_{IK}	Input clamp current			-18			-18	mA
I_{OH}	High-level output current			-12			-12	mA
I_{OL}	Low-level output current			12			48	mA
T_A	Operating free-air temperature range	-55		+125	-55		+125	°C

DC ELECTRICAL CHARACTERISTICS (Over recommended operating free-air temperature range unless otherwise noted.)

SYMBOL	PARAMETER	TEST CONDITIONS ¹	54LS240, 241			54S240, 241			UNIT
			Min	Typ ²	Max	Min	Typ ²	Max	
ΔV_T	Hysteresis ($V_{T+} - V_{T-}$) ⁵	$V_{CC} = \text{Min}$	0.2	0.4		0.2	0.4		V
V_{OH}	High-level output voltage	$V_{CC} = \text{Min}, V_{IH} = \text{Min}, V_{IL} = 0.5V, I_{OH} = \text{Max}$	2.0			2.0			V
		$V_{CC} = \text{Min}, V_{IH} = \text{Min}, V_{IL} = \text{Max}, I_{OH} = -3\text{mA}$	2.4	3.4		2.4			V
V_{OL}	Low-level output voltage	$V_{CC} = \text{Min}, V_{IH} = \text{Min}, V_{IL} = \text{Max}, I_{OL} = \text{Max}$			0.4			0.55	V
V_{IK}	Input clamp voltage	$V_{CC} = \text{Min}, I_I = I_{IK}$			-1.5			-1.2	V
I_{OZH}	Offstate output current, High-level voltage applied	$V_{CC} = \text{Max}, V_{IH} = \text{Min}, V_{IL} = \text{Max}$	$V_O = 2.7V$		20				μA
			$V_O = 2.4V$					50	μA
I_{OZL}	Offstate output current, Low-level voltage applied	$V_{CC} = \text{Max}, V_{IH} = \text{Min}, V_{IL} = \text{Max}$	$V_O = 0.4V$		-20				μA
			$V_O = 0.5V$					-50	μA
I_{IH2}	Input current at maximum input voltage	$V_{CC} = \text{Max}$	$V_I = 5.5V$					1.0	mA
			$V_I = 7.0V$		0.1				mA
I_{IH1}	High-level input current	$V_{CC} = \text{Max}, V_I = 2.7V$			20			50	μA
I_{IL}	Low-level input current	$V_{CC} = \text{Max}$	$V_I = 0.4V$		-0.2				mA
			$V_I = 0.5V$					-2.0	mA
			OE inputs					-0.4	mA
			Other inputs						mA
I_{OS}	Short-circuit output current ³	$V_{CC} = \text{Max}$	-40		-130	-80		-180	mA
I_{CC}	Supply current ⁴ (total)	$V_{CC} = \text{Max}$	I_{CCH} Outputs High		17	27	95	147	mA
			I_{CCL} Outputs Low		27	46	120	170	mA
			I_{CCZ} Outputs Off		32	54	120	170	mA

Buffers**54LS244, 54S244****AC ELECTRICAL CHARACTERISTICS** $T_A = 25^\circ\text{C}$, $V_{CC} = 5.0\text{V}$

SYMBOL	PARAMETER	TEST CONDITIONS	54LS		54S		UNIT
			C _L = 50pF		C _L = 50pF		
			Min	Max	Min	Max	
t _{PLH}	Propagation delay	Waveform 1		18		9	ns
t _{PHL}	Propagation delay	Waveform 1		18		9	ns
t _{PZH}	Enable to High	Waveform 2		23		12	ns
t _{PZL}	Enable to Low	Waveform 3		30		15	ns
t _{PHZ}	Disable from High	Waveform 2, C _L = 5pF ⁶		18		9	ns
t _{PLZ}	Disable from Low	Waveform 3, C _L = 5pF ⁶		25		15	ns
t _{PHZ}	Disable from High	Waveform 2, C _L = 50pF		34		14	ns
t _{PLZ}	Disable from Low	Waveform 3, C _L = 50pF		27		16.5	ns

AC ELECTRICAL CHARACTERISTICS $T_A = -55^\circ\text{C}$ and $+125^\circ\text{C}$, $V_{CC} = 5.0\text{V}^5$

SYMBOL	PARAMETER	TEST CONDITIONS	54LS		54S		UNIT
			$C_L = 50\text{pF}$		$C_L = 50\text{pF}$		
			Min	Max	Min	Max	
t_{PLH}	Propagation delay	Waveform 1		23		16	ns
t_{PHL}	Propagation delay	Waveform 1		23		12	ns
t_{PZH}	Enable to High	Waveform 2		30		16	ns
t_{PZL}	Enable to Low	Waveform 3		39		20	ns
t_{PHZ}	Disable from High	Waveform 2, $C_L = 5\text{pF}^6$		24		12	ns
t_{PLZ}	Disable from Low	Waveform 3, $C_L = 5\text{pF}^6$		33		20	ns
t_{PHZ}	Disable from High	Waveform 2, $C_L = 50\text{pF}$		44		18	ns
t_{PLZ}	Disable from Low	Waveform 3, $C_L = 50\text{pF}$		35		22	ns


NOTES:

1. For conditions shown as Min or Max, use the appropriate value specified under recommended operating conditions for the applicable type and function table operating mode.
2. All typical values are at $V_{CC} = 5\text{V}$, $T_A = 25^\circ\text{C}$.
3. Not more than one output should be shorted at a time and duration of the short circuit should not exceed one second.
4. I_{CC} is measured with outputs open.
5. These parameters are guaranteed, but not tested.
6. Guaranteed by 50pF limits, but not tested.


Buffers

54LS244, 54S244


AC WAVEFORMS

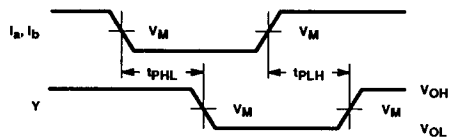

Waveform 1. Waveform for Non-Inverting Outputs

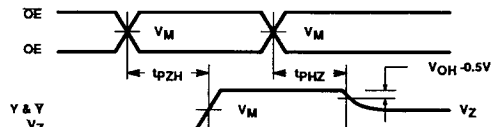

Waveform 2. 3-State Enable Time to High Level and Disable Time from High Level

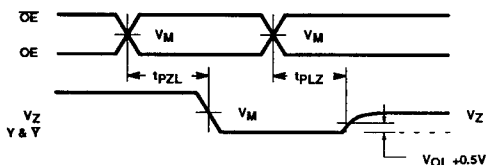

Waveform 3. 3-State Enable Time to Low Level and Disable Time from Low Level

FAMILY	V_M	V_{MZL}	V_{MZH}	V_Z
54LSXXX	1.3V	0.7V	1.9V	1.45V
54SXXX	1.5V	0.7V	2.0V	1.65V

Buffers

54LS244, 54S244

TEST CIRCUIT AND WAVEFORM

